

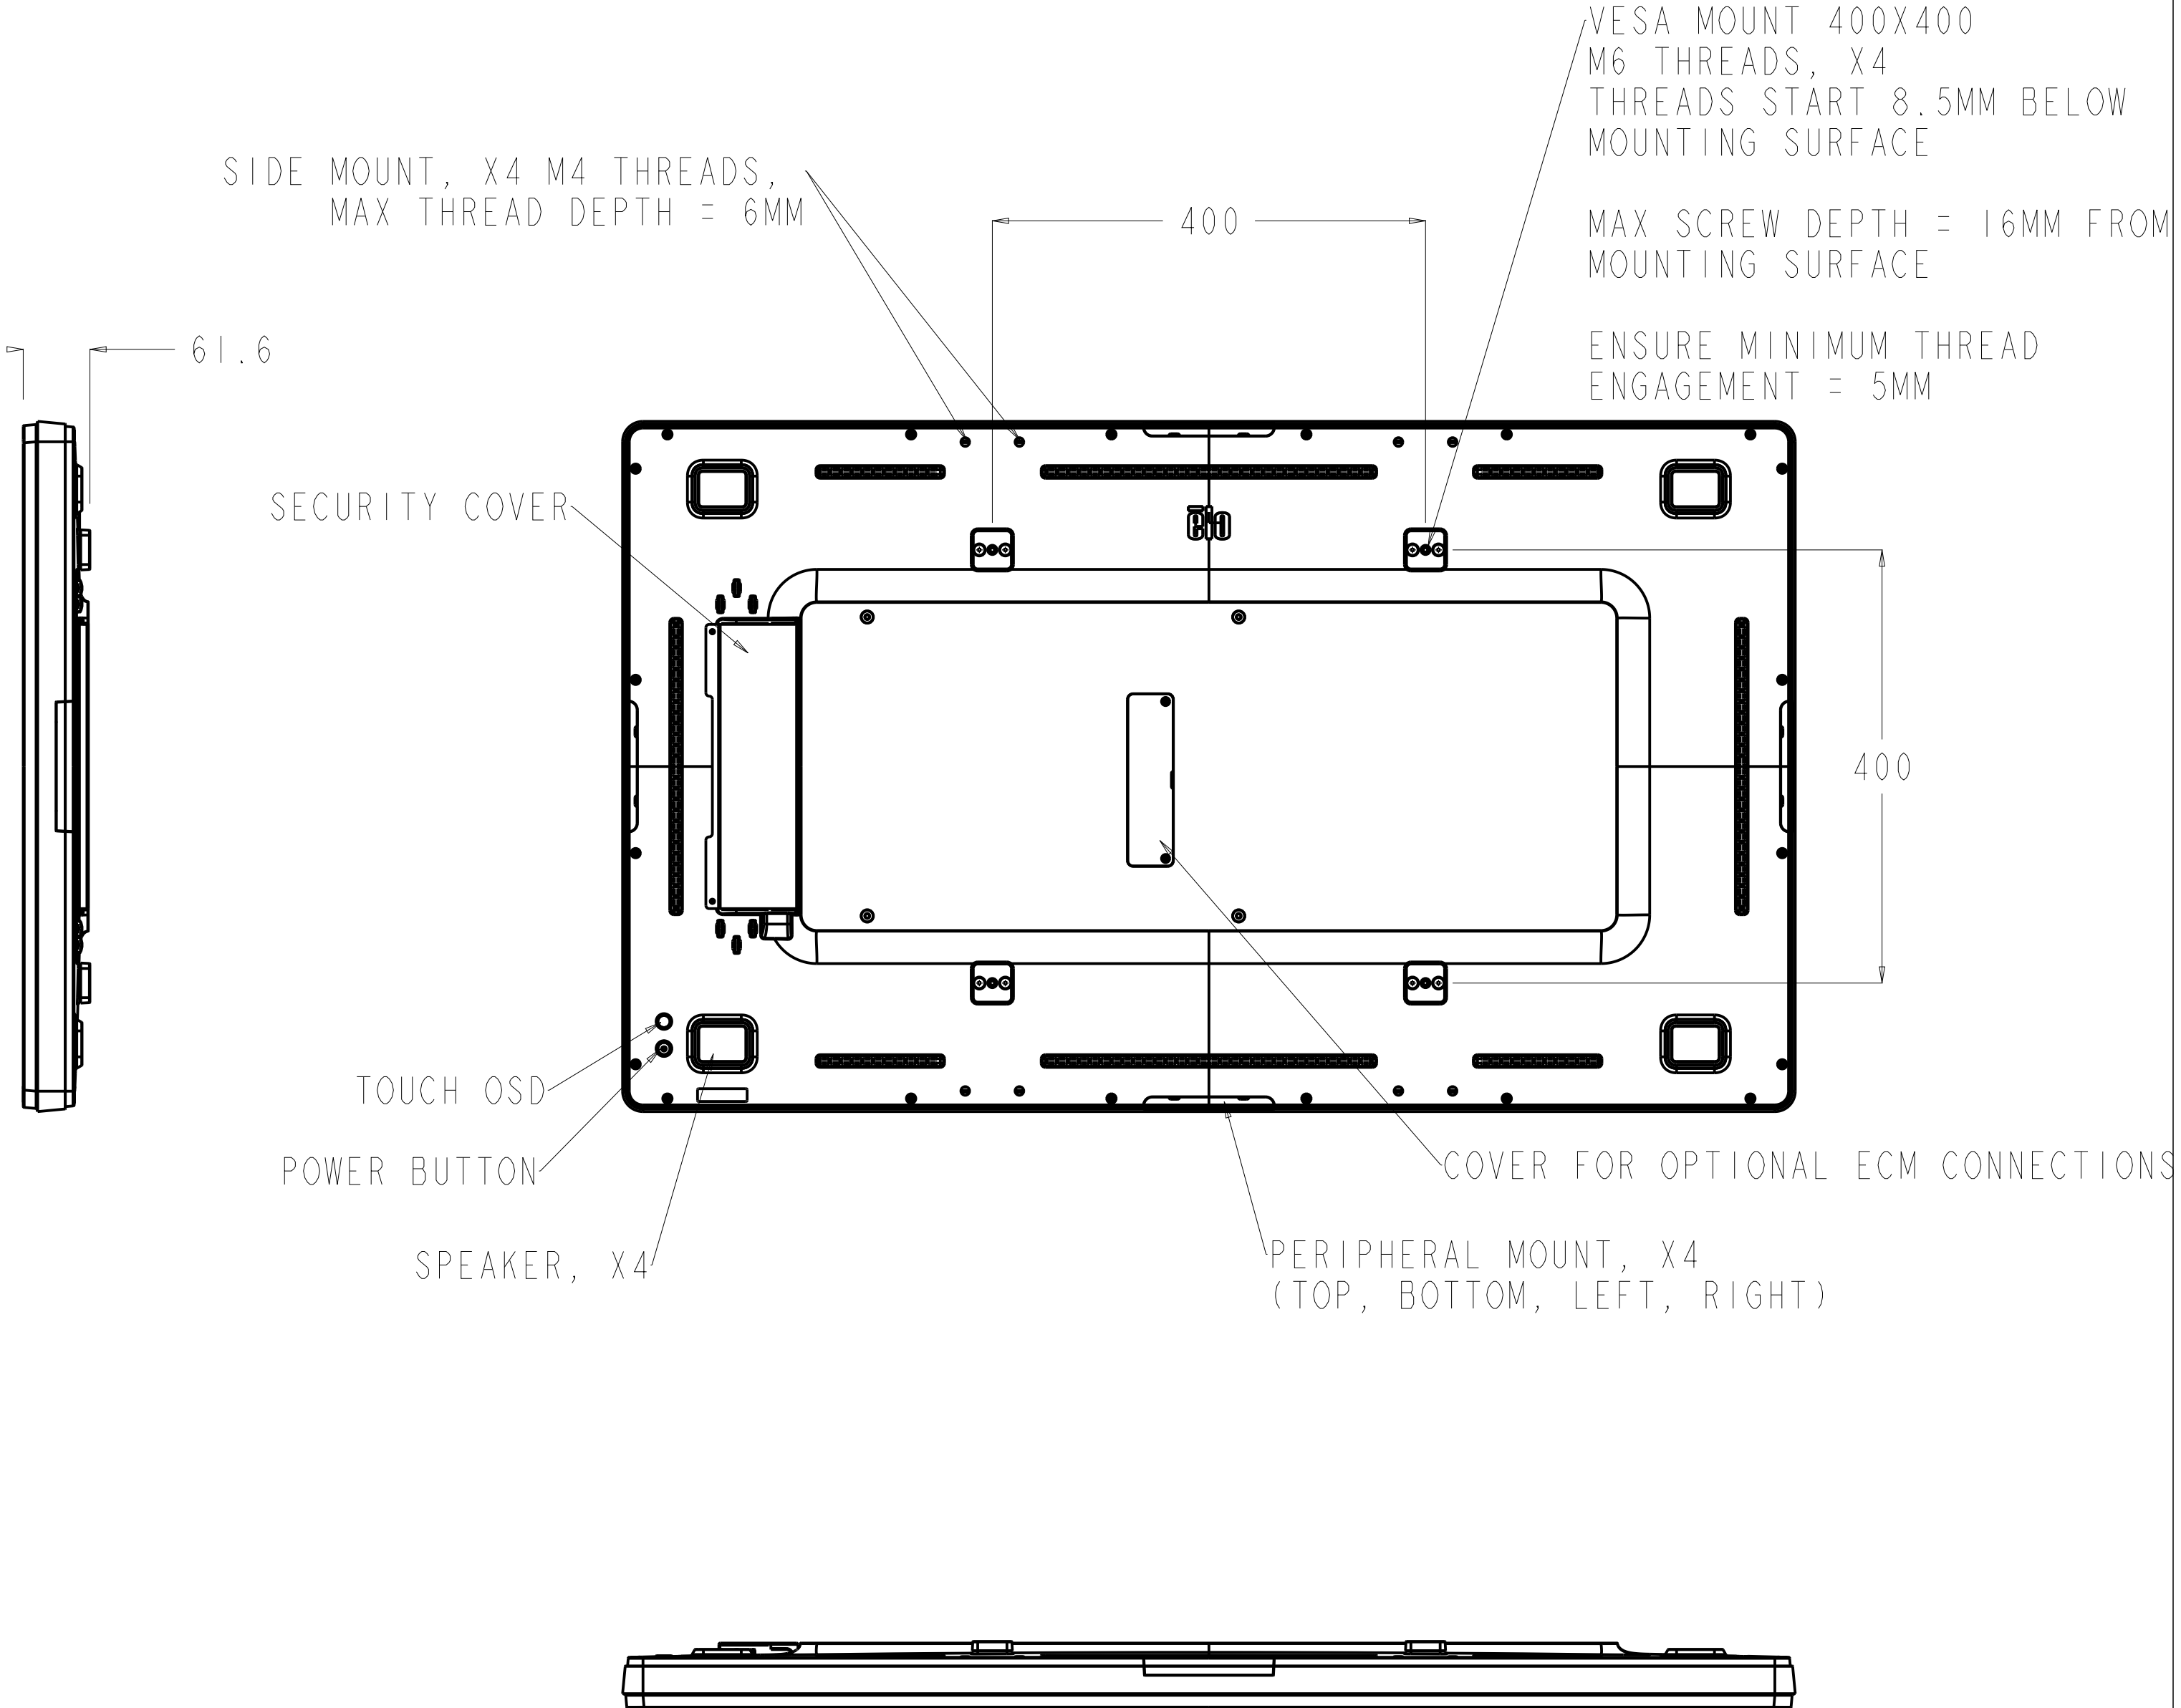
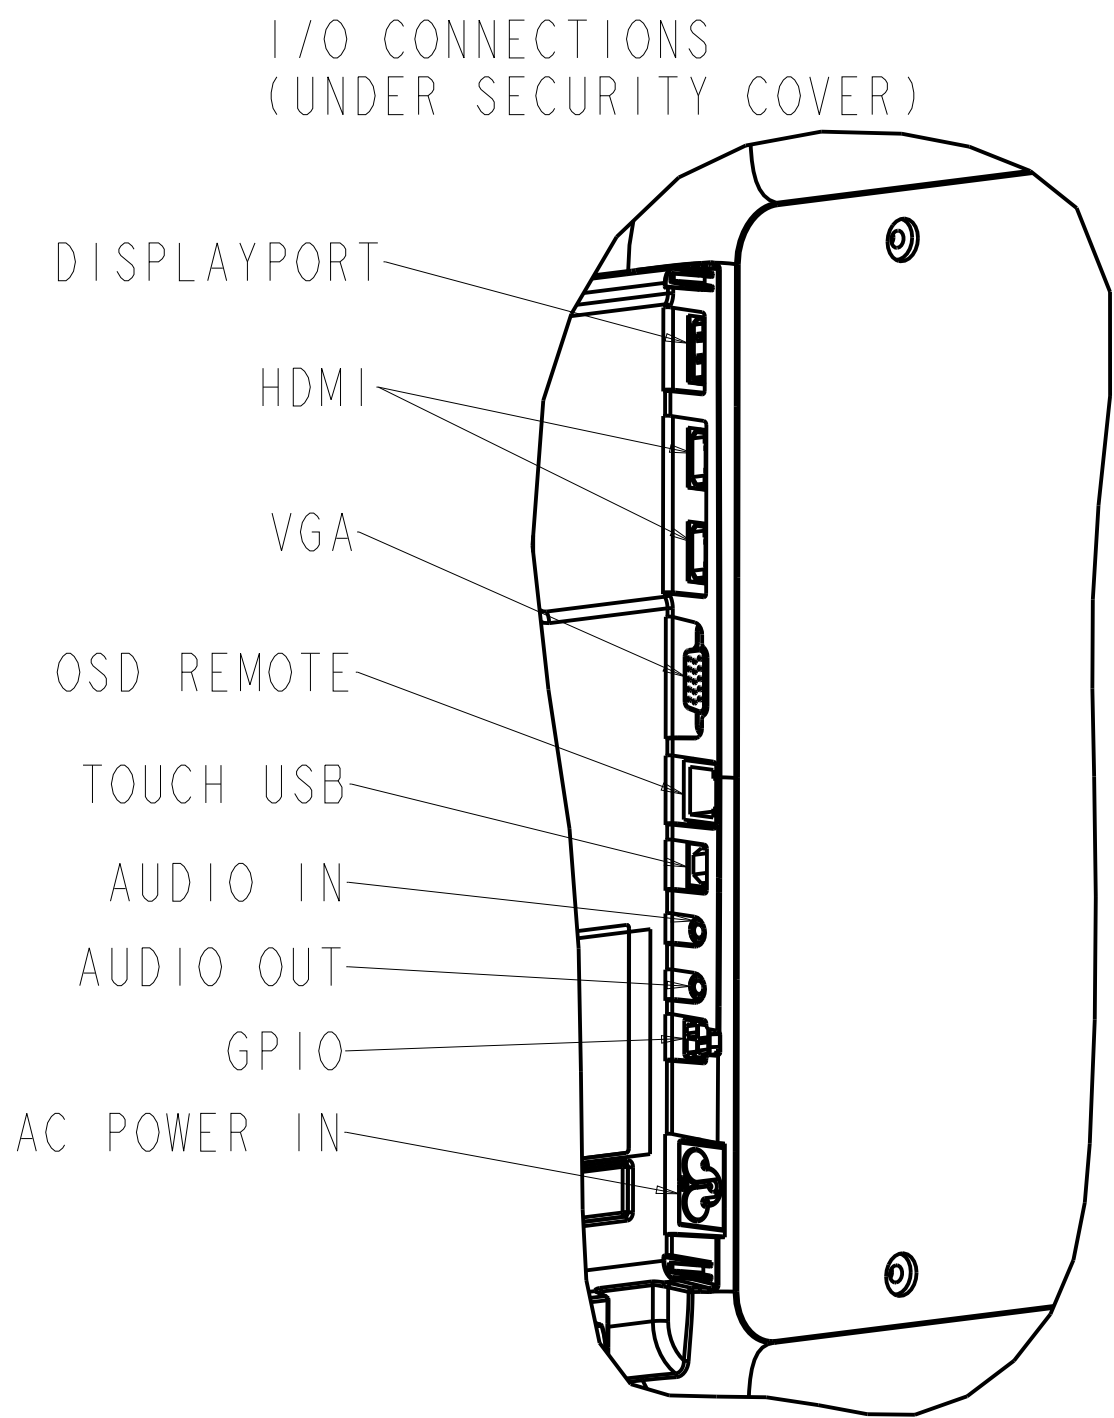




赤外線走査方式モデルET4602L-9UWA-0-MT-GY-G

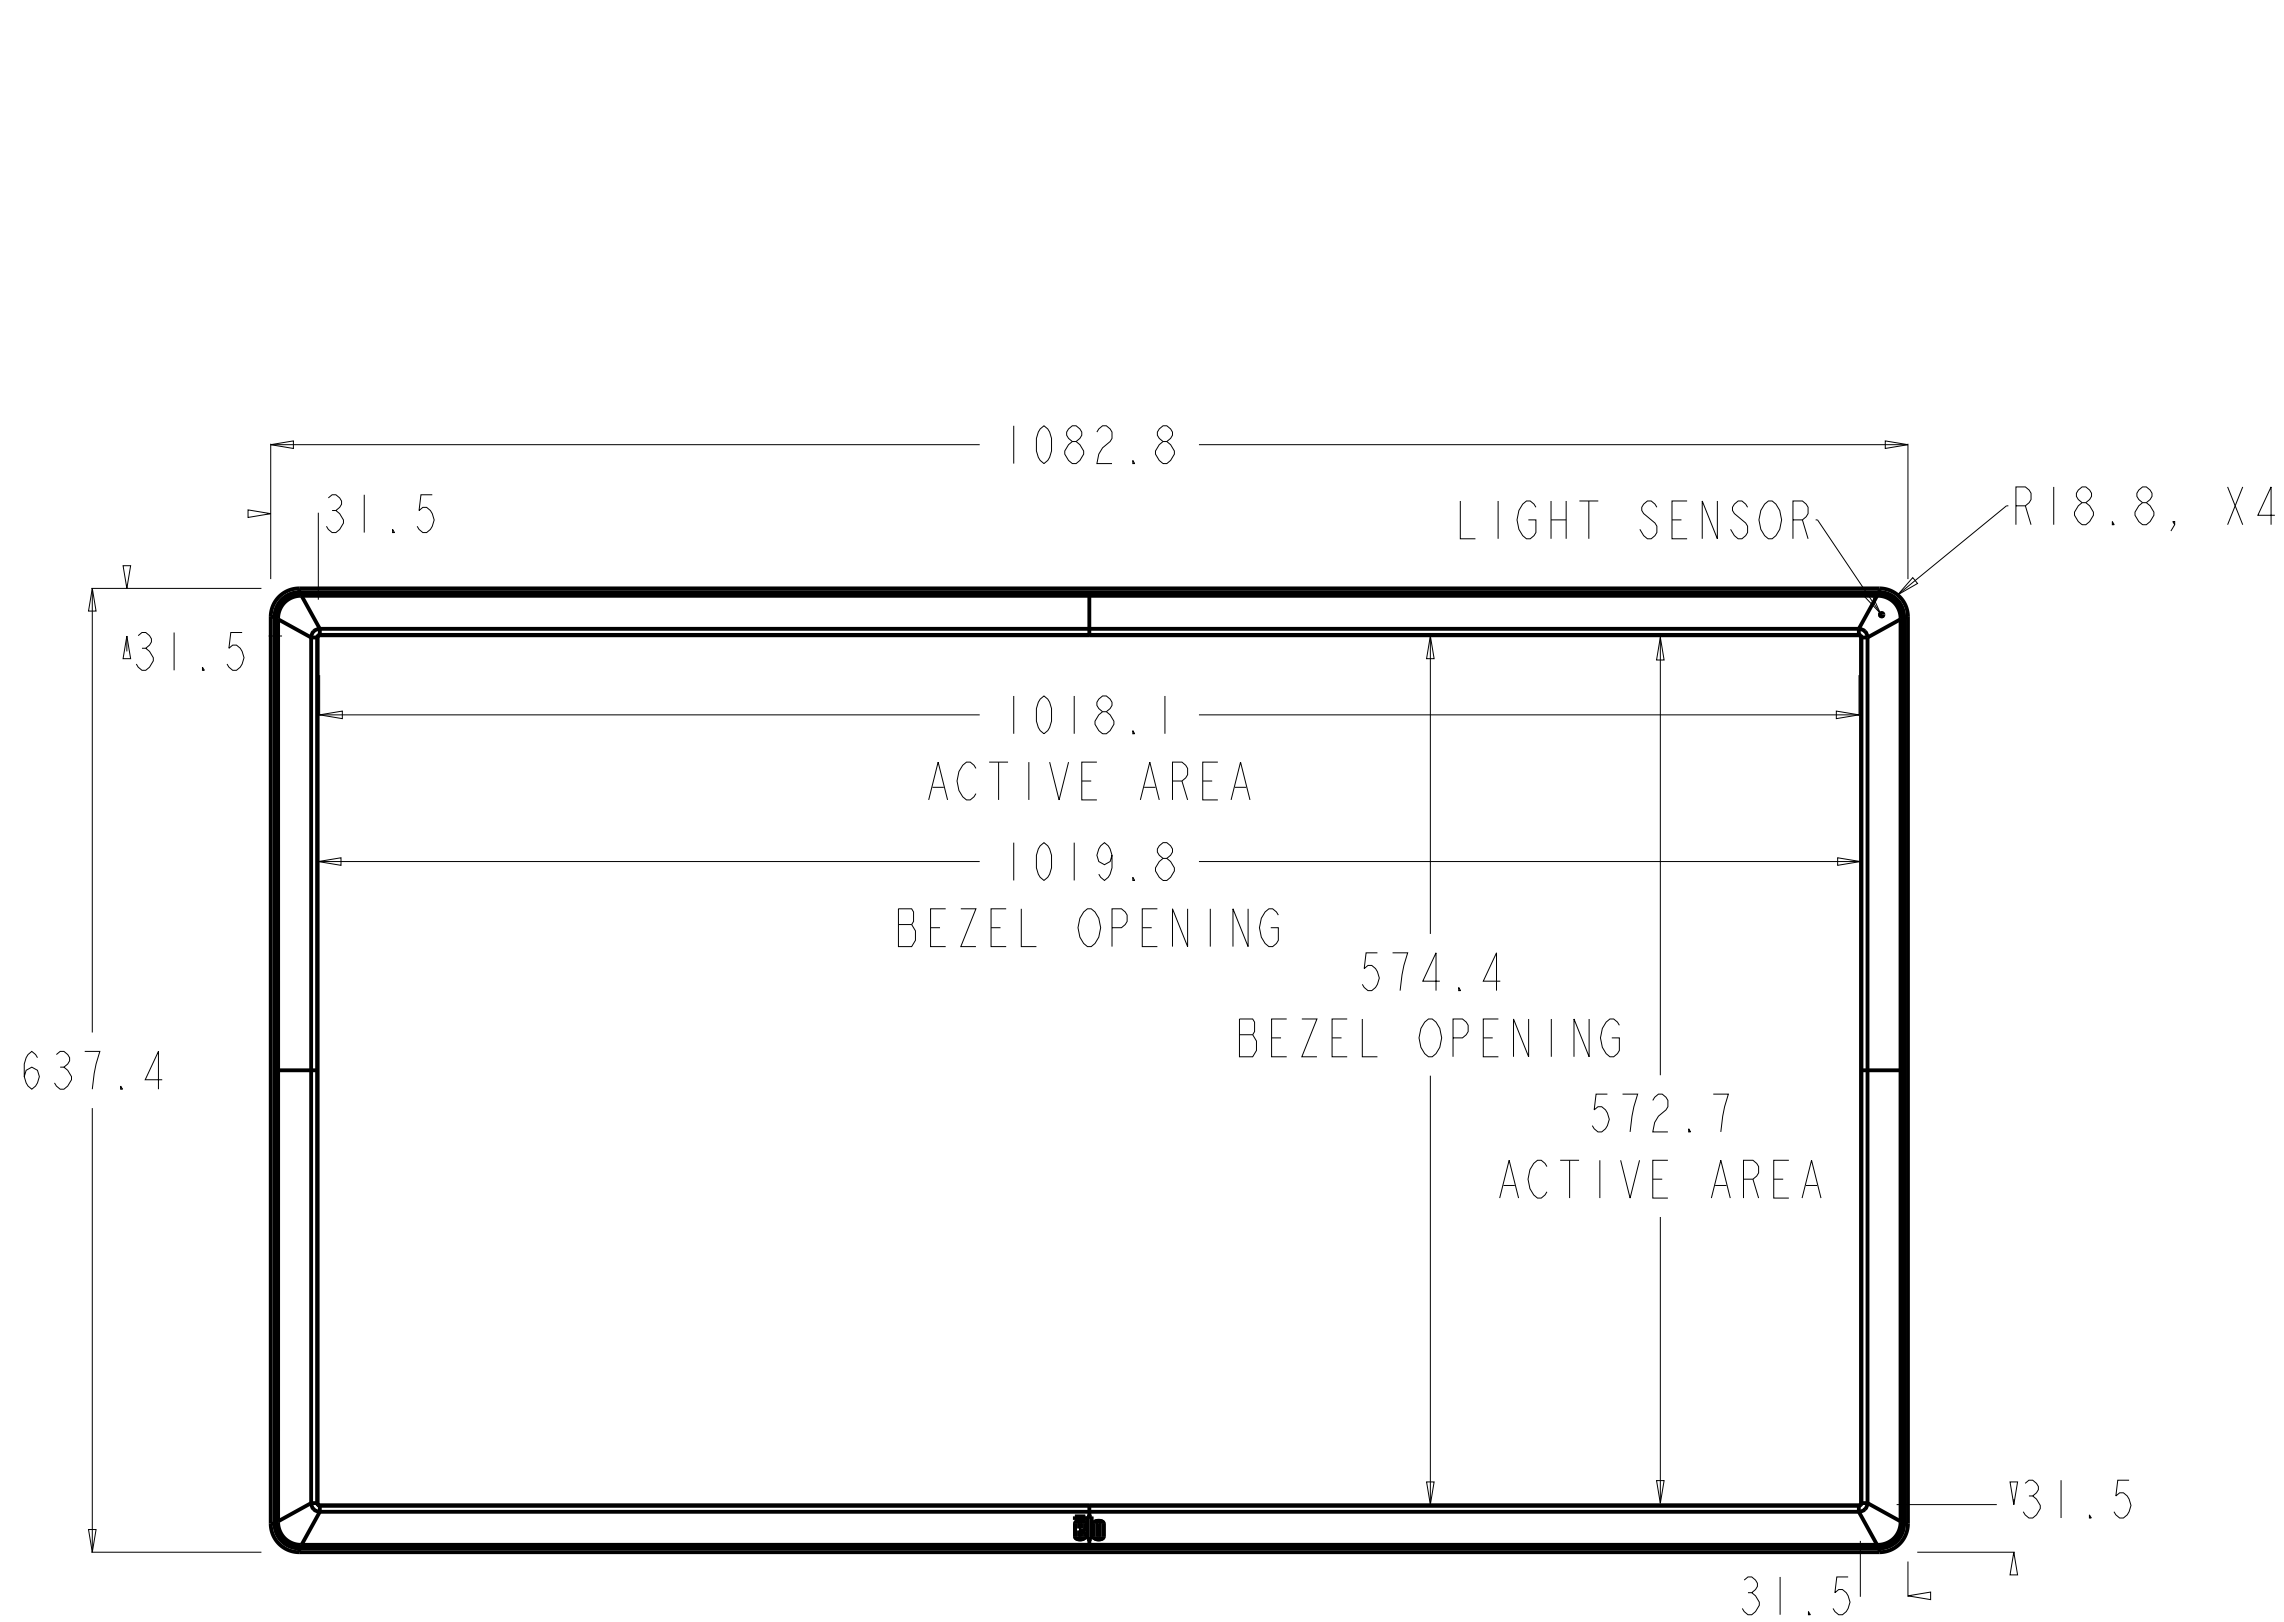


投影型静電容量方式モデル（ゼロベゼル） ET4602L-2UWA-0-MT-ZB-GY-G

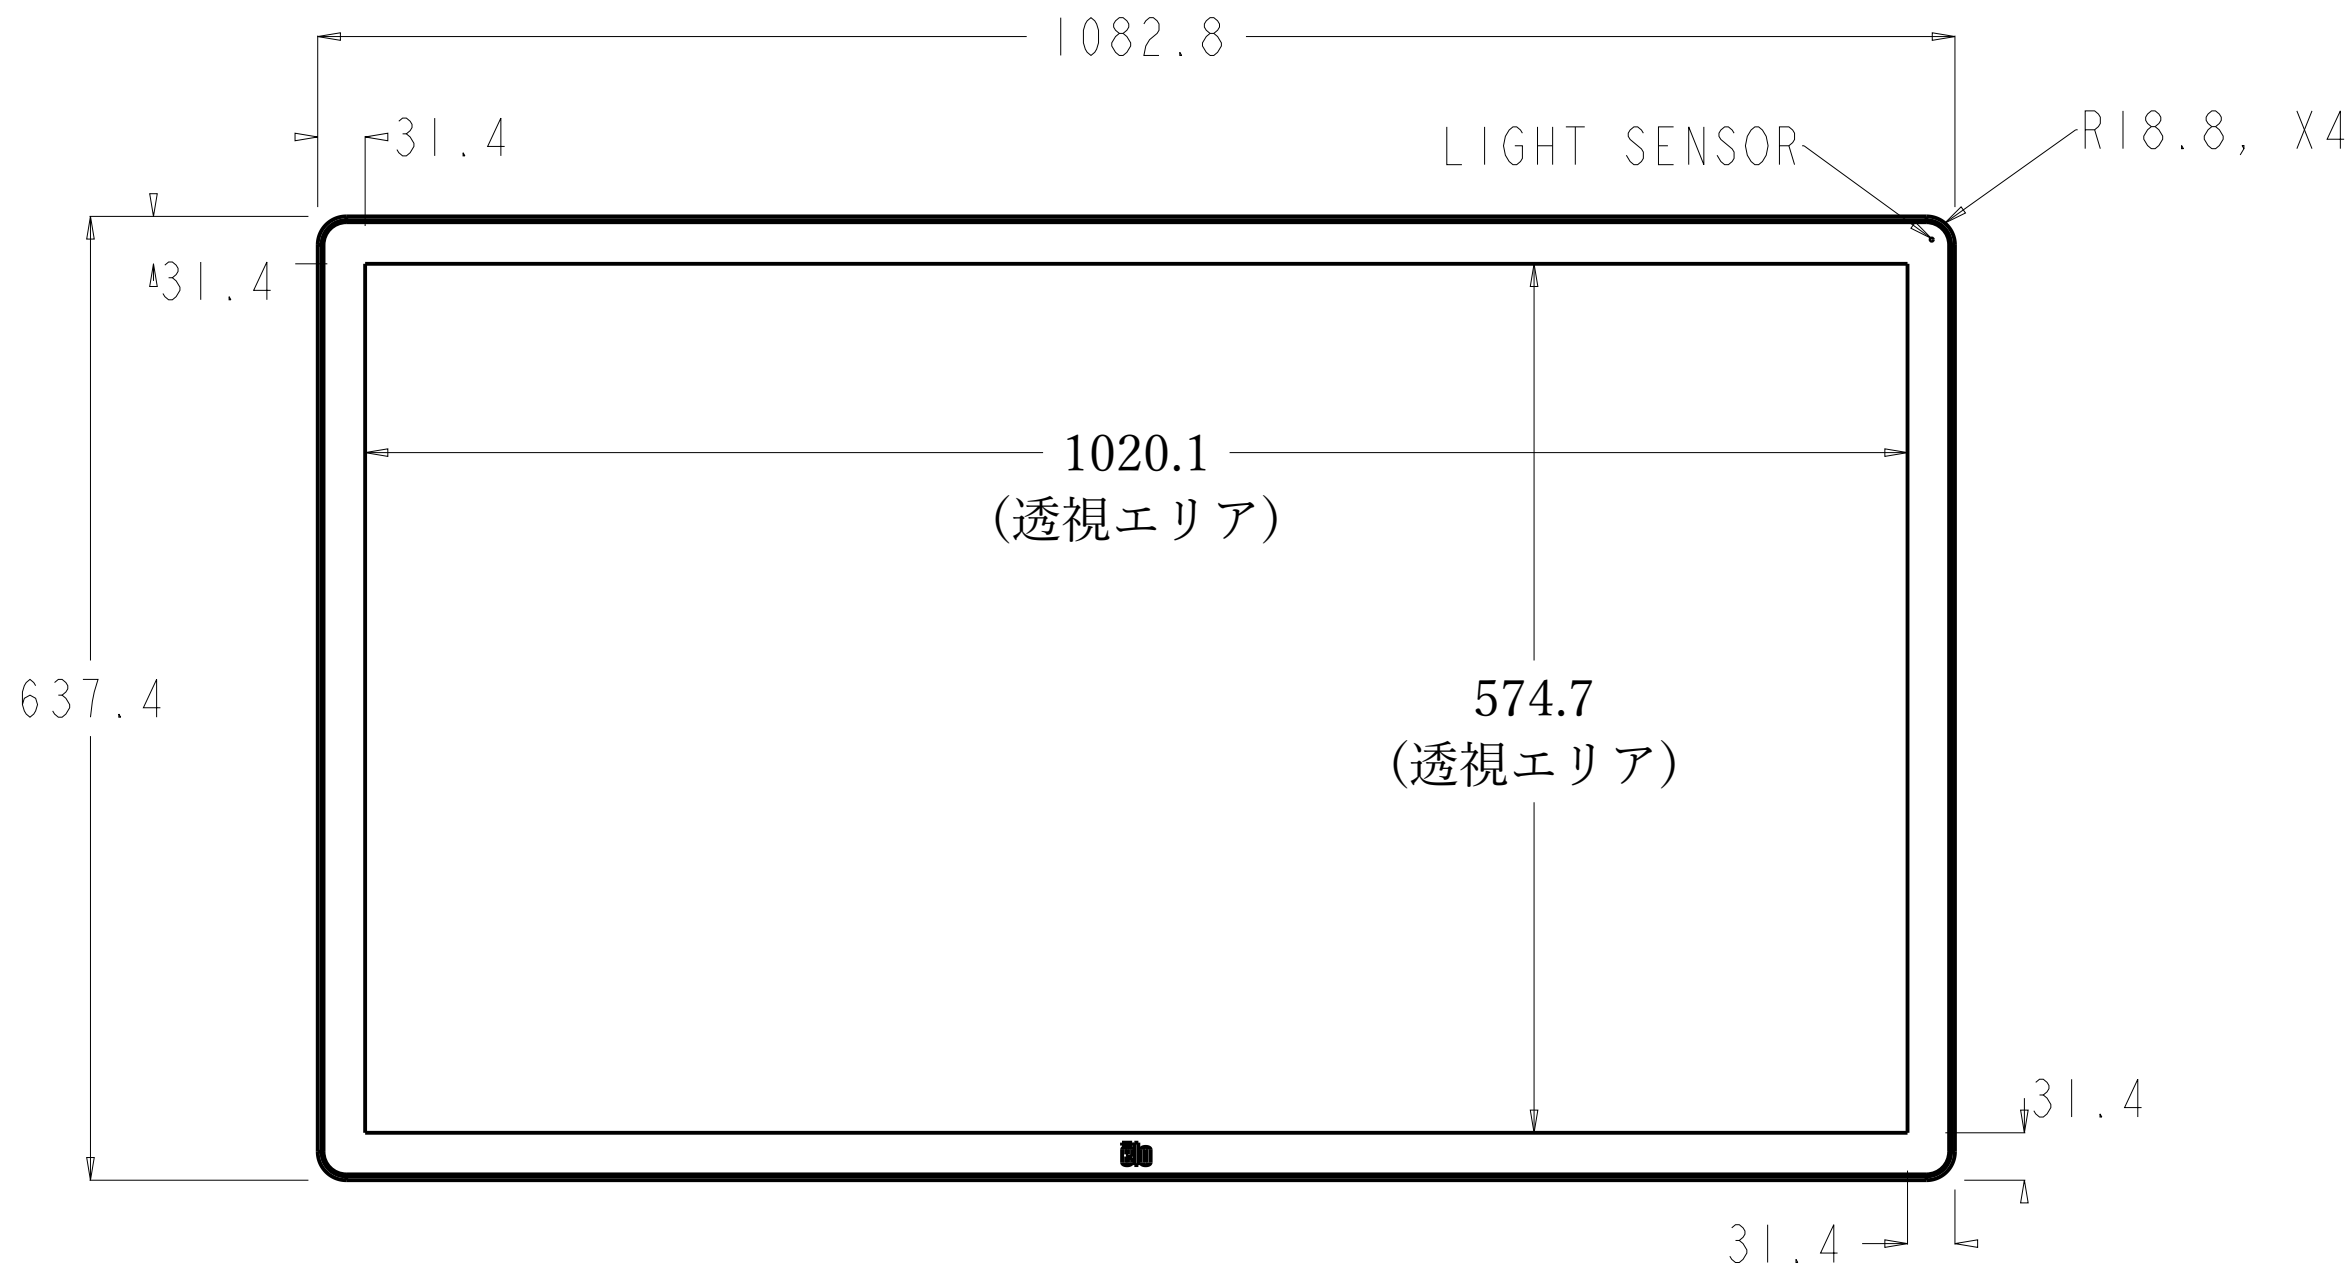

I/O CONNECTIONS
(UNDER SECURITY COVER)

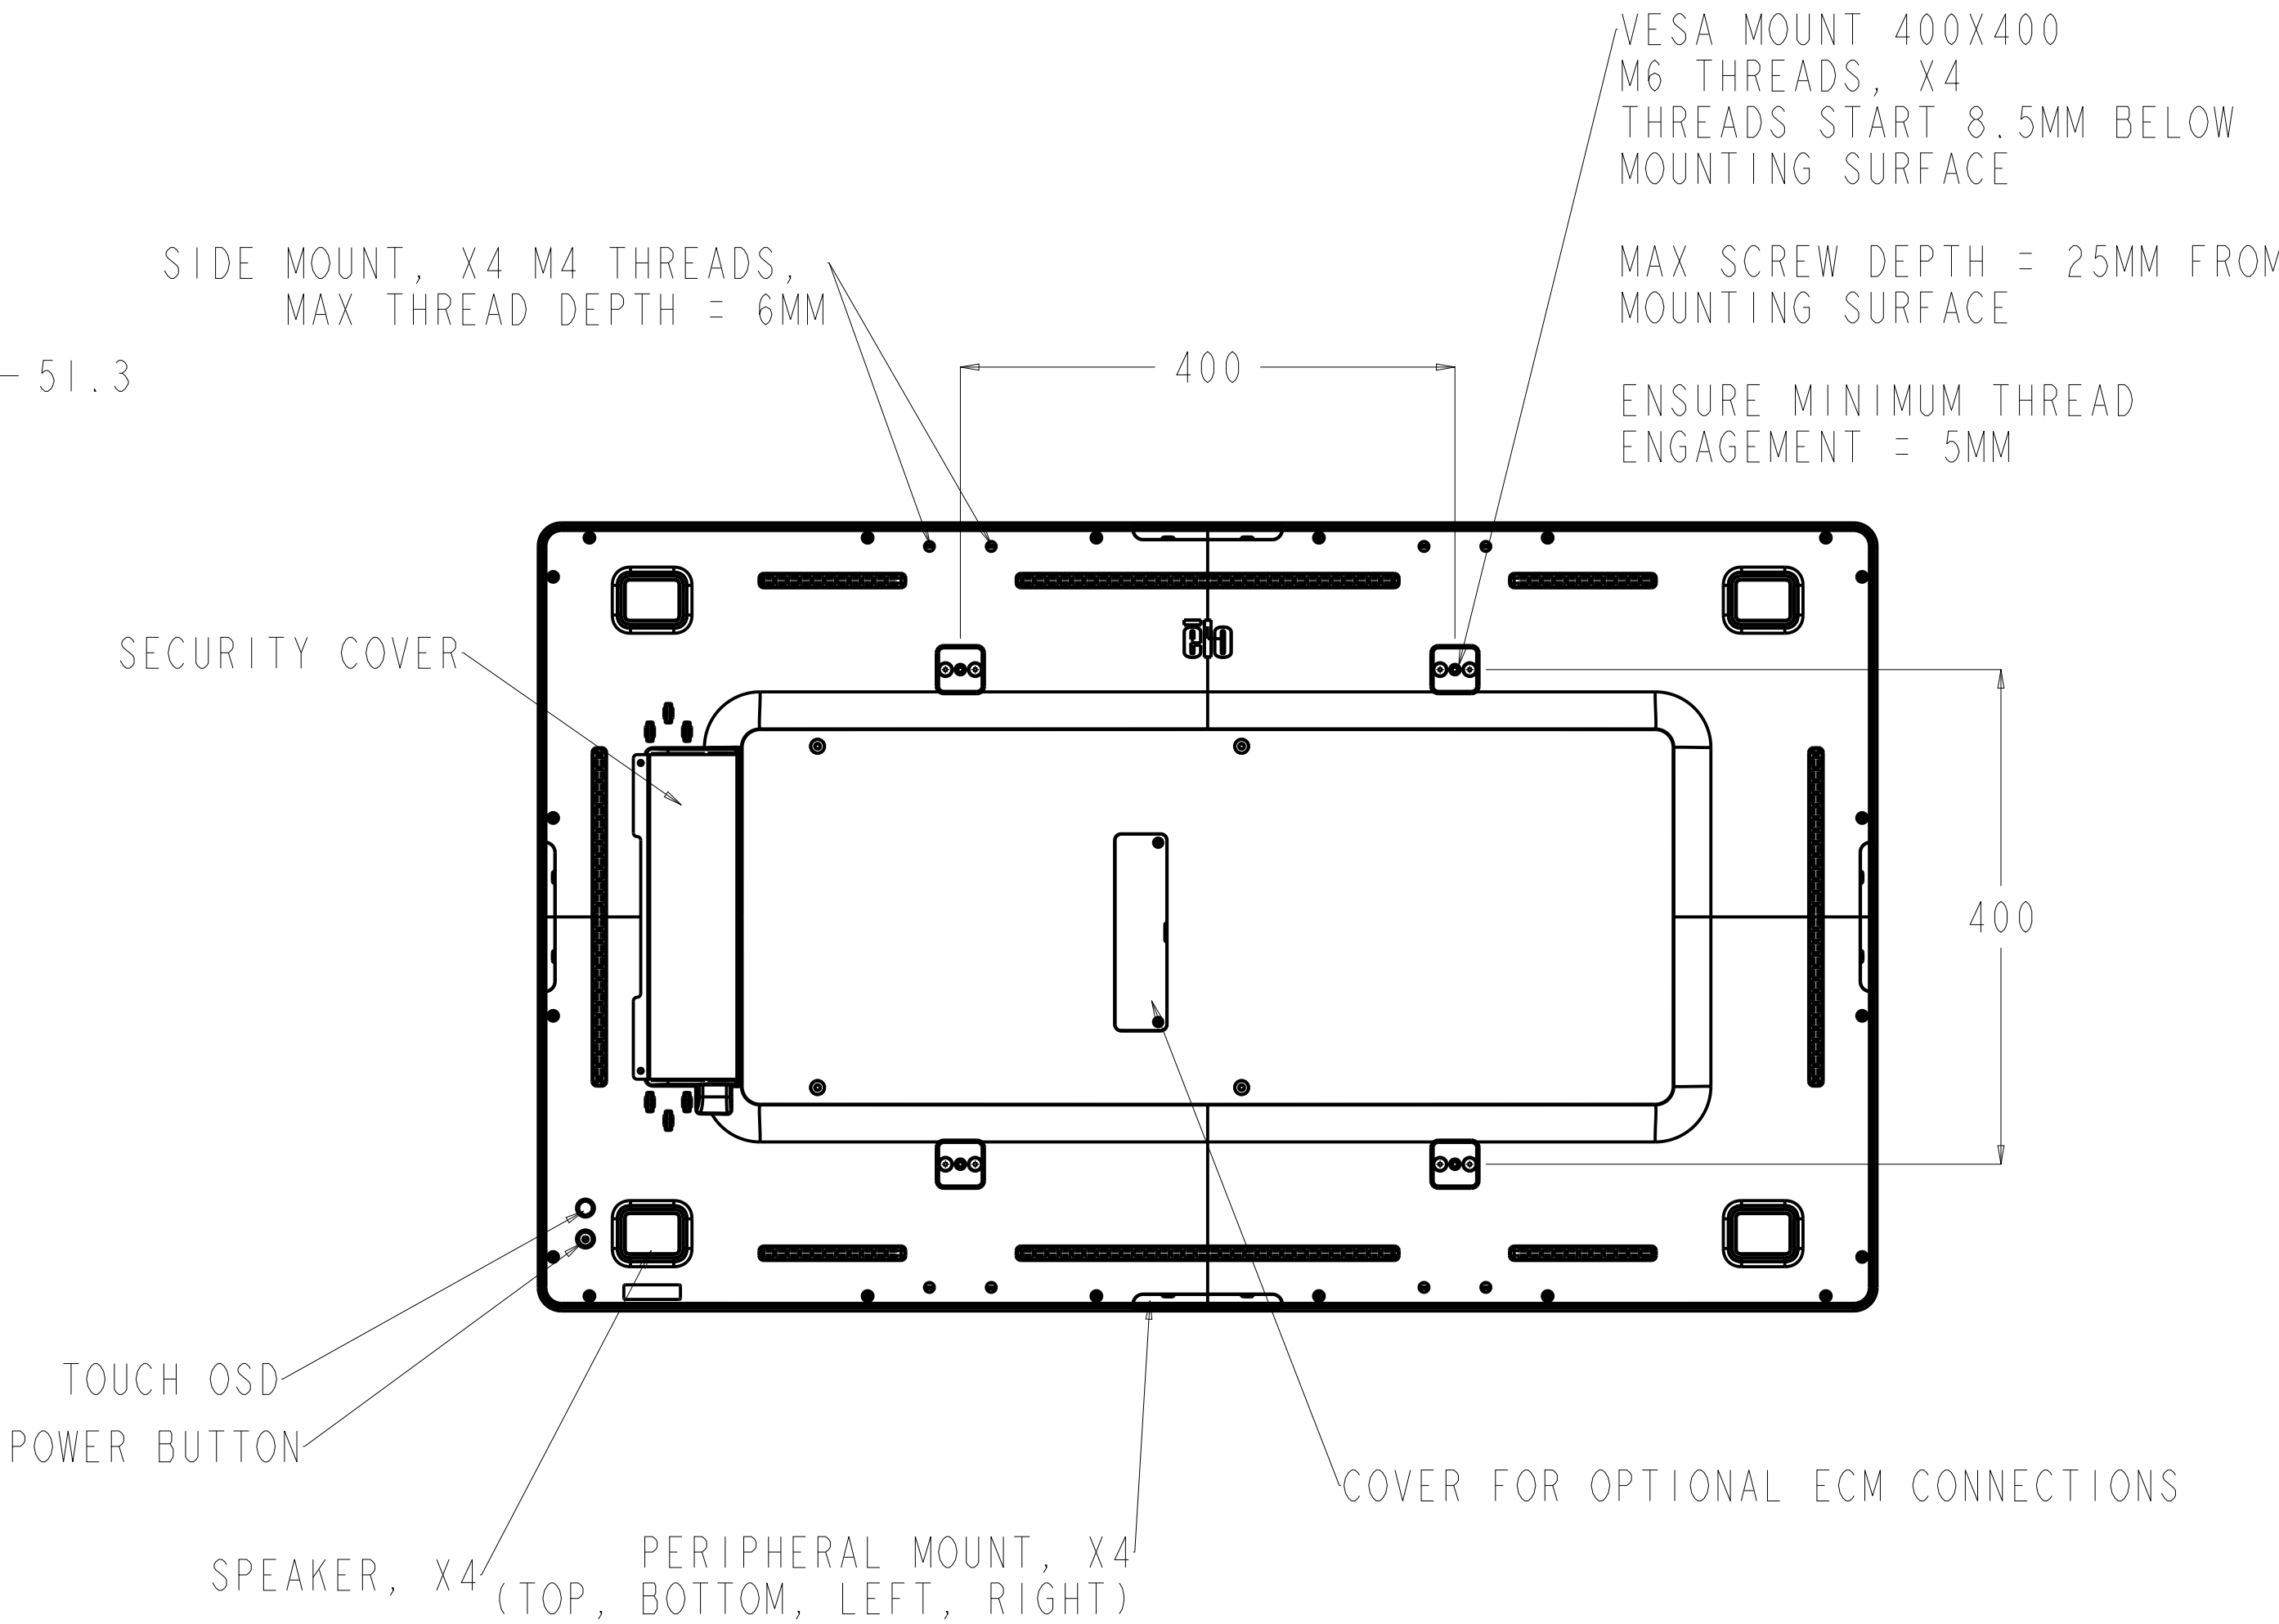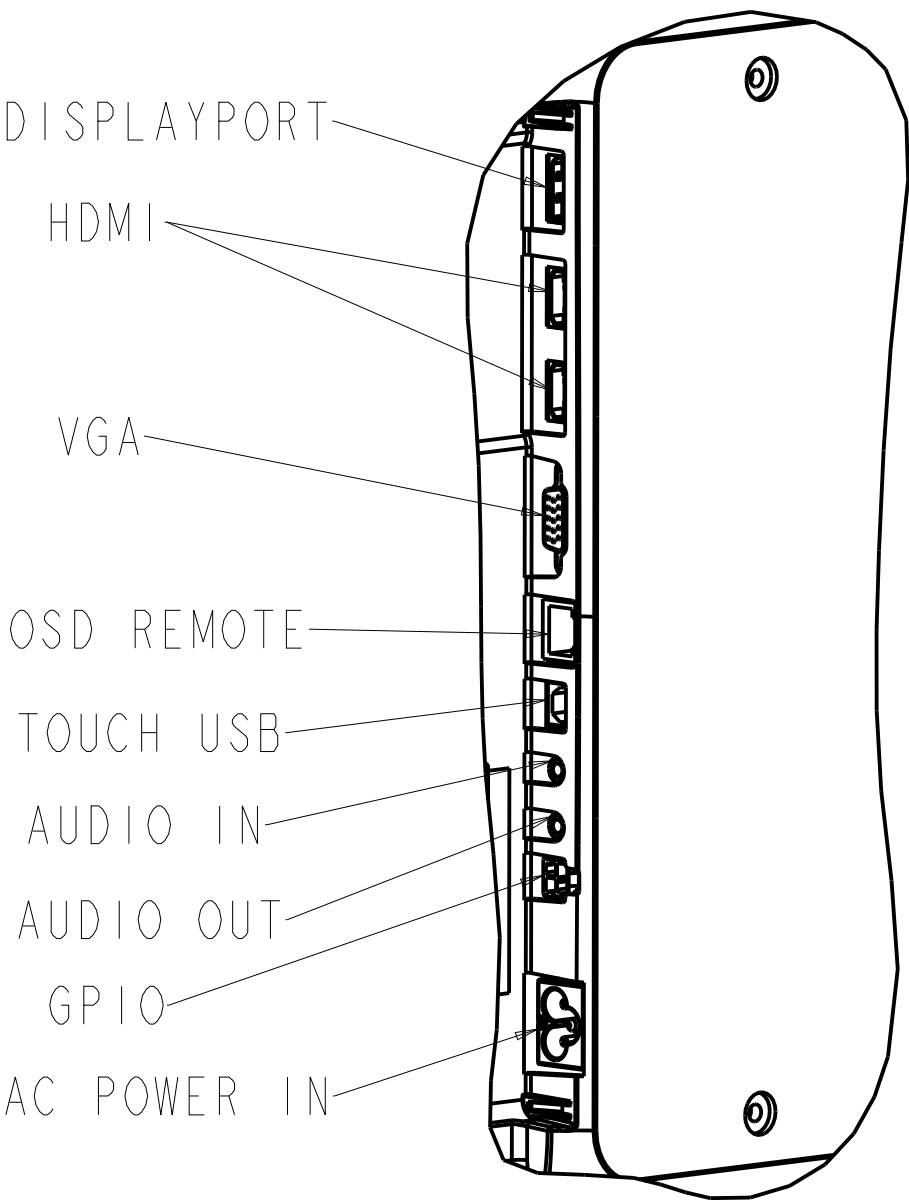

OPTIONAL SIDE MOUNT BRACKET KIT P/N E329508
4 ADJUSTABLE BRACKETS INCLUDED IN KIT
CUSTOMER ASSEMBLED

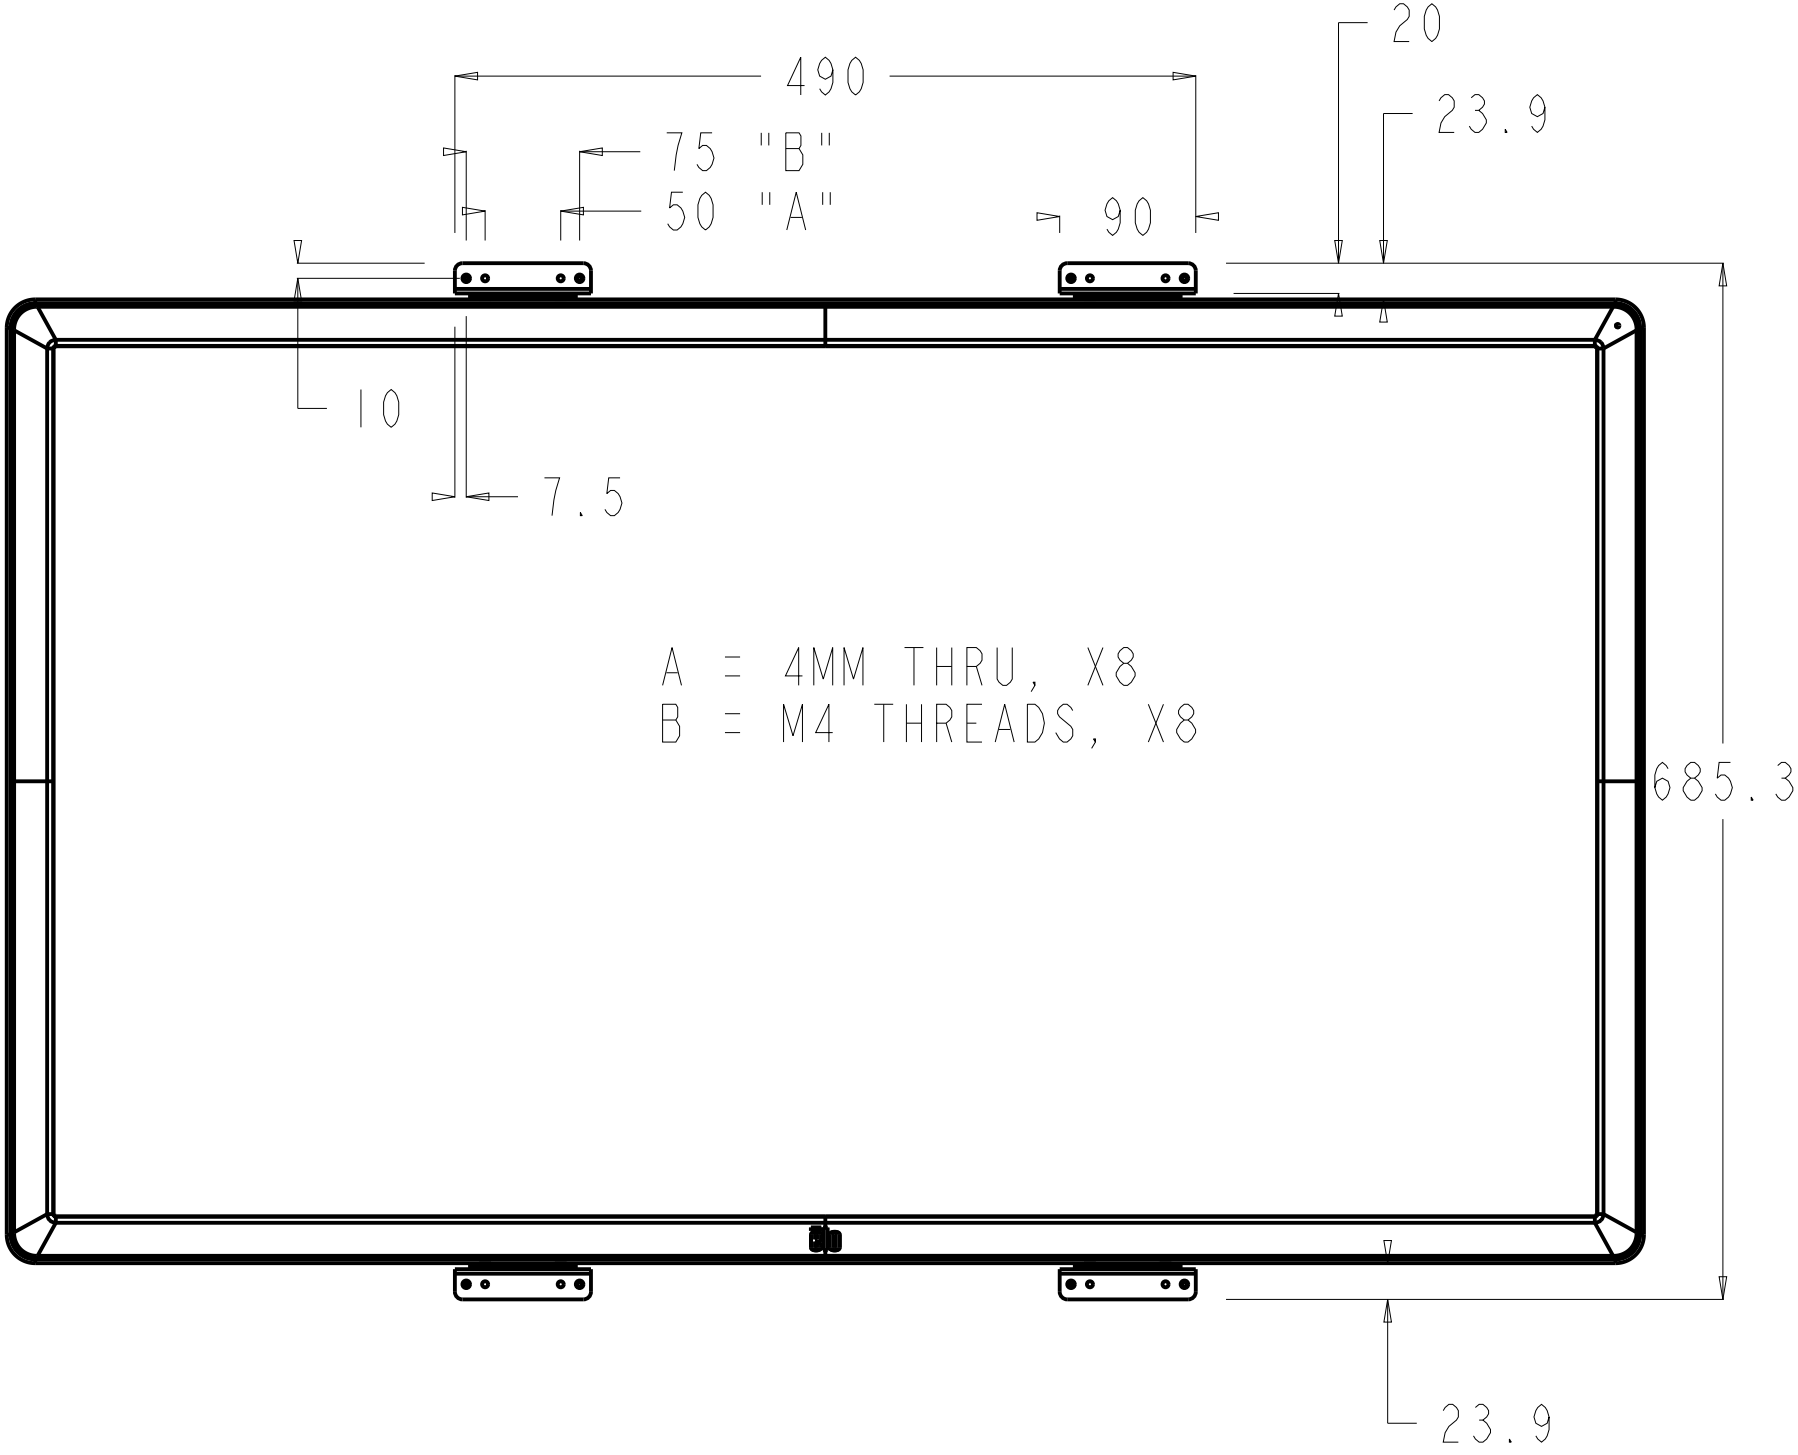

ADJUSTMENT RANGE:
IR = 2.4 TO 27.4
PCAP = -7.9 TO 17.1



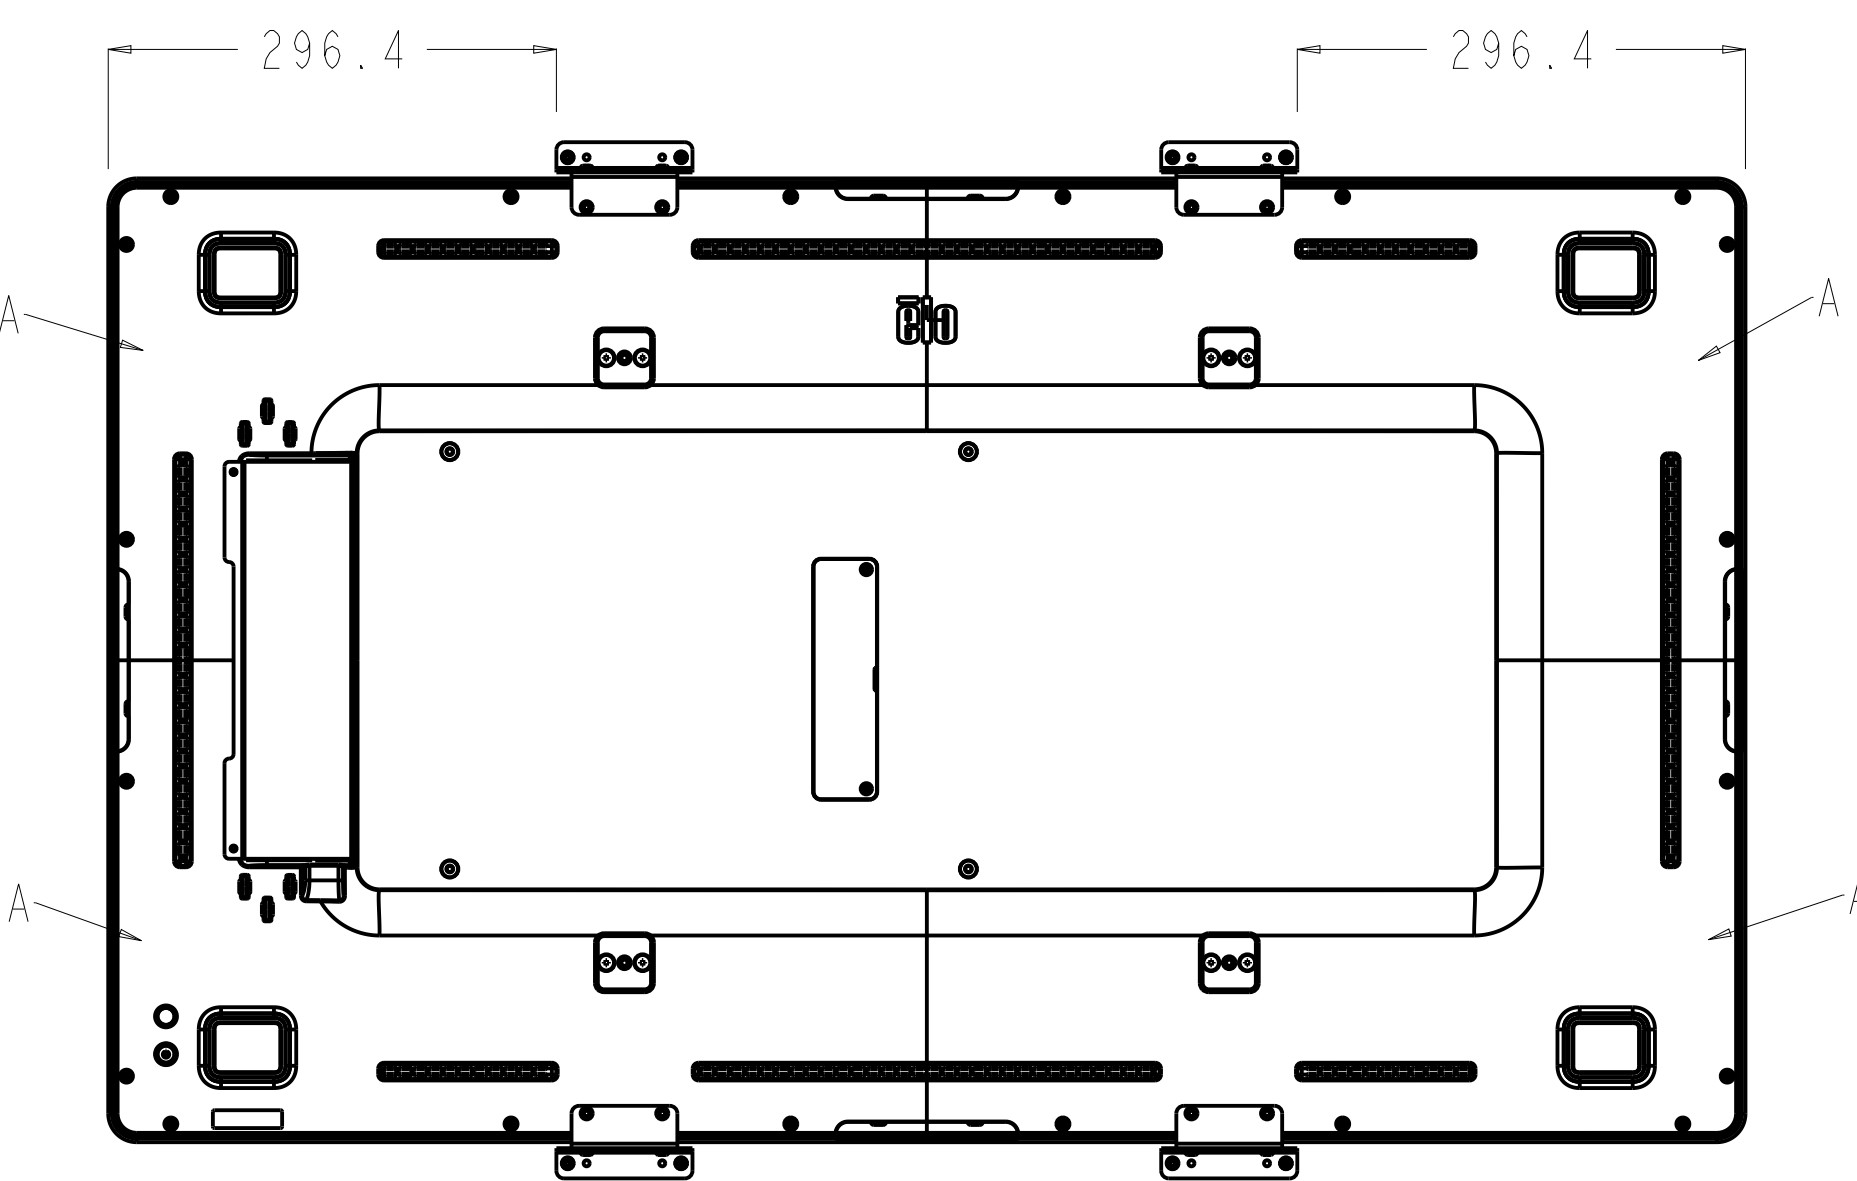


TABLE-TOP ORIENTATION

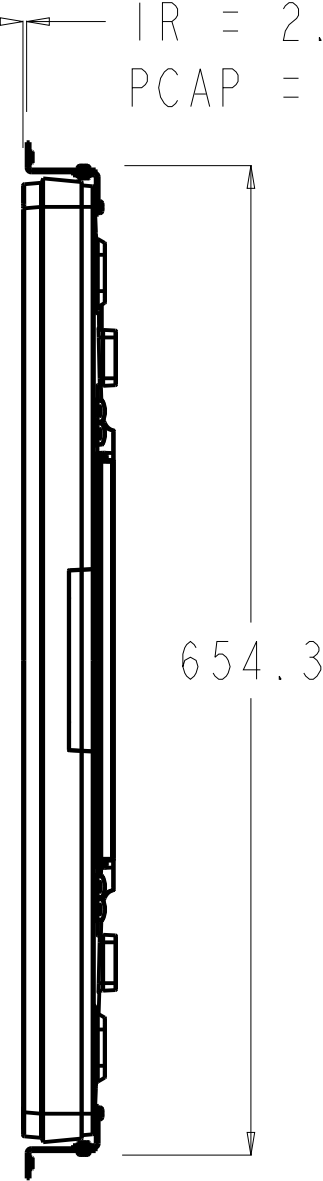

WARNING FOR TABLE-TOP MOUNTING ORIENTATION:
LEFT AND RIGHT EDGES OF 4602L MUST BE SUPPORTED
IN THE 4 LOCATIONS MARKED "A" TO PREVENT
BENDING OVER TIME DUE TO GRAVITY

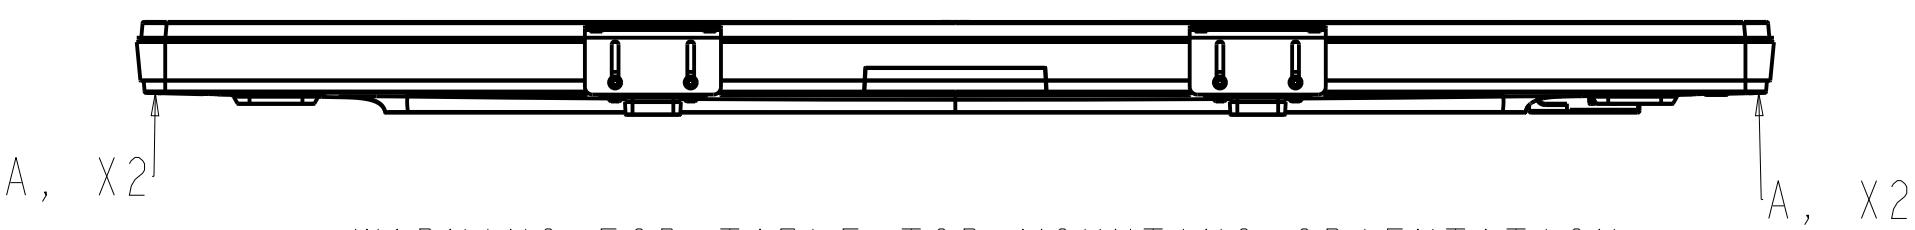