

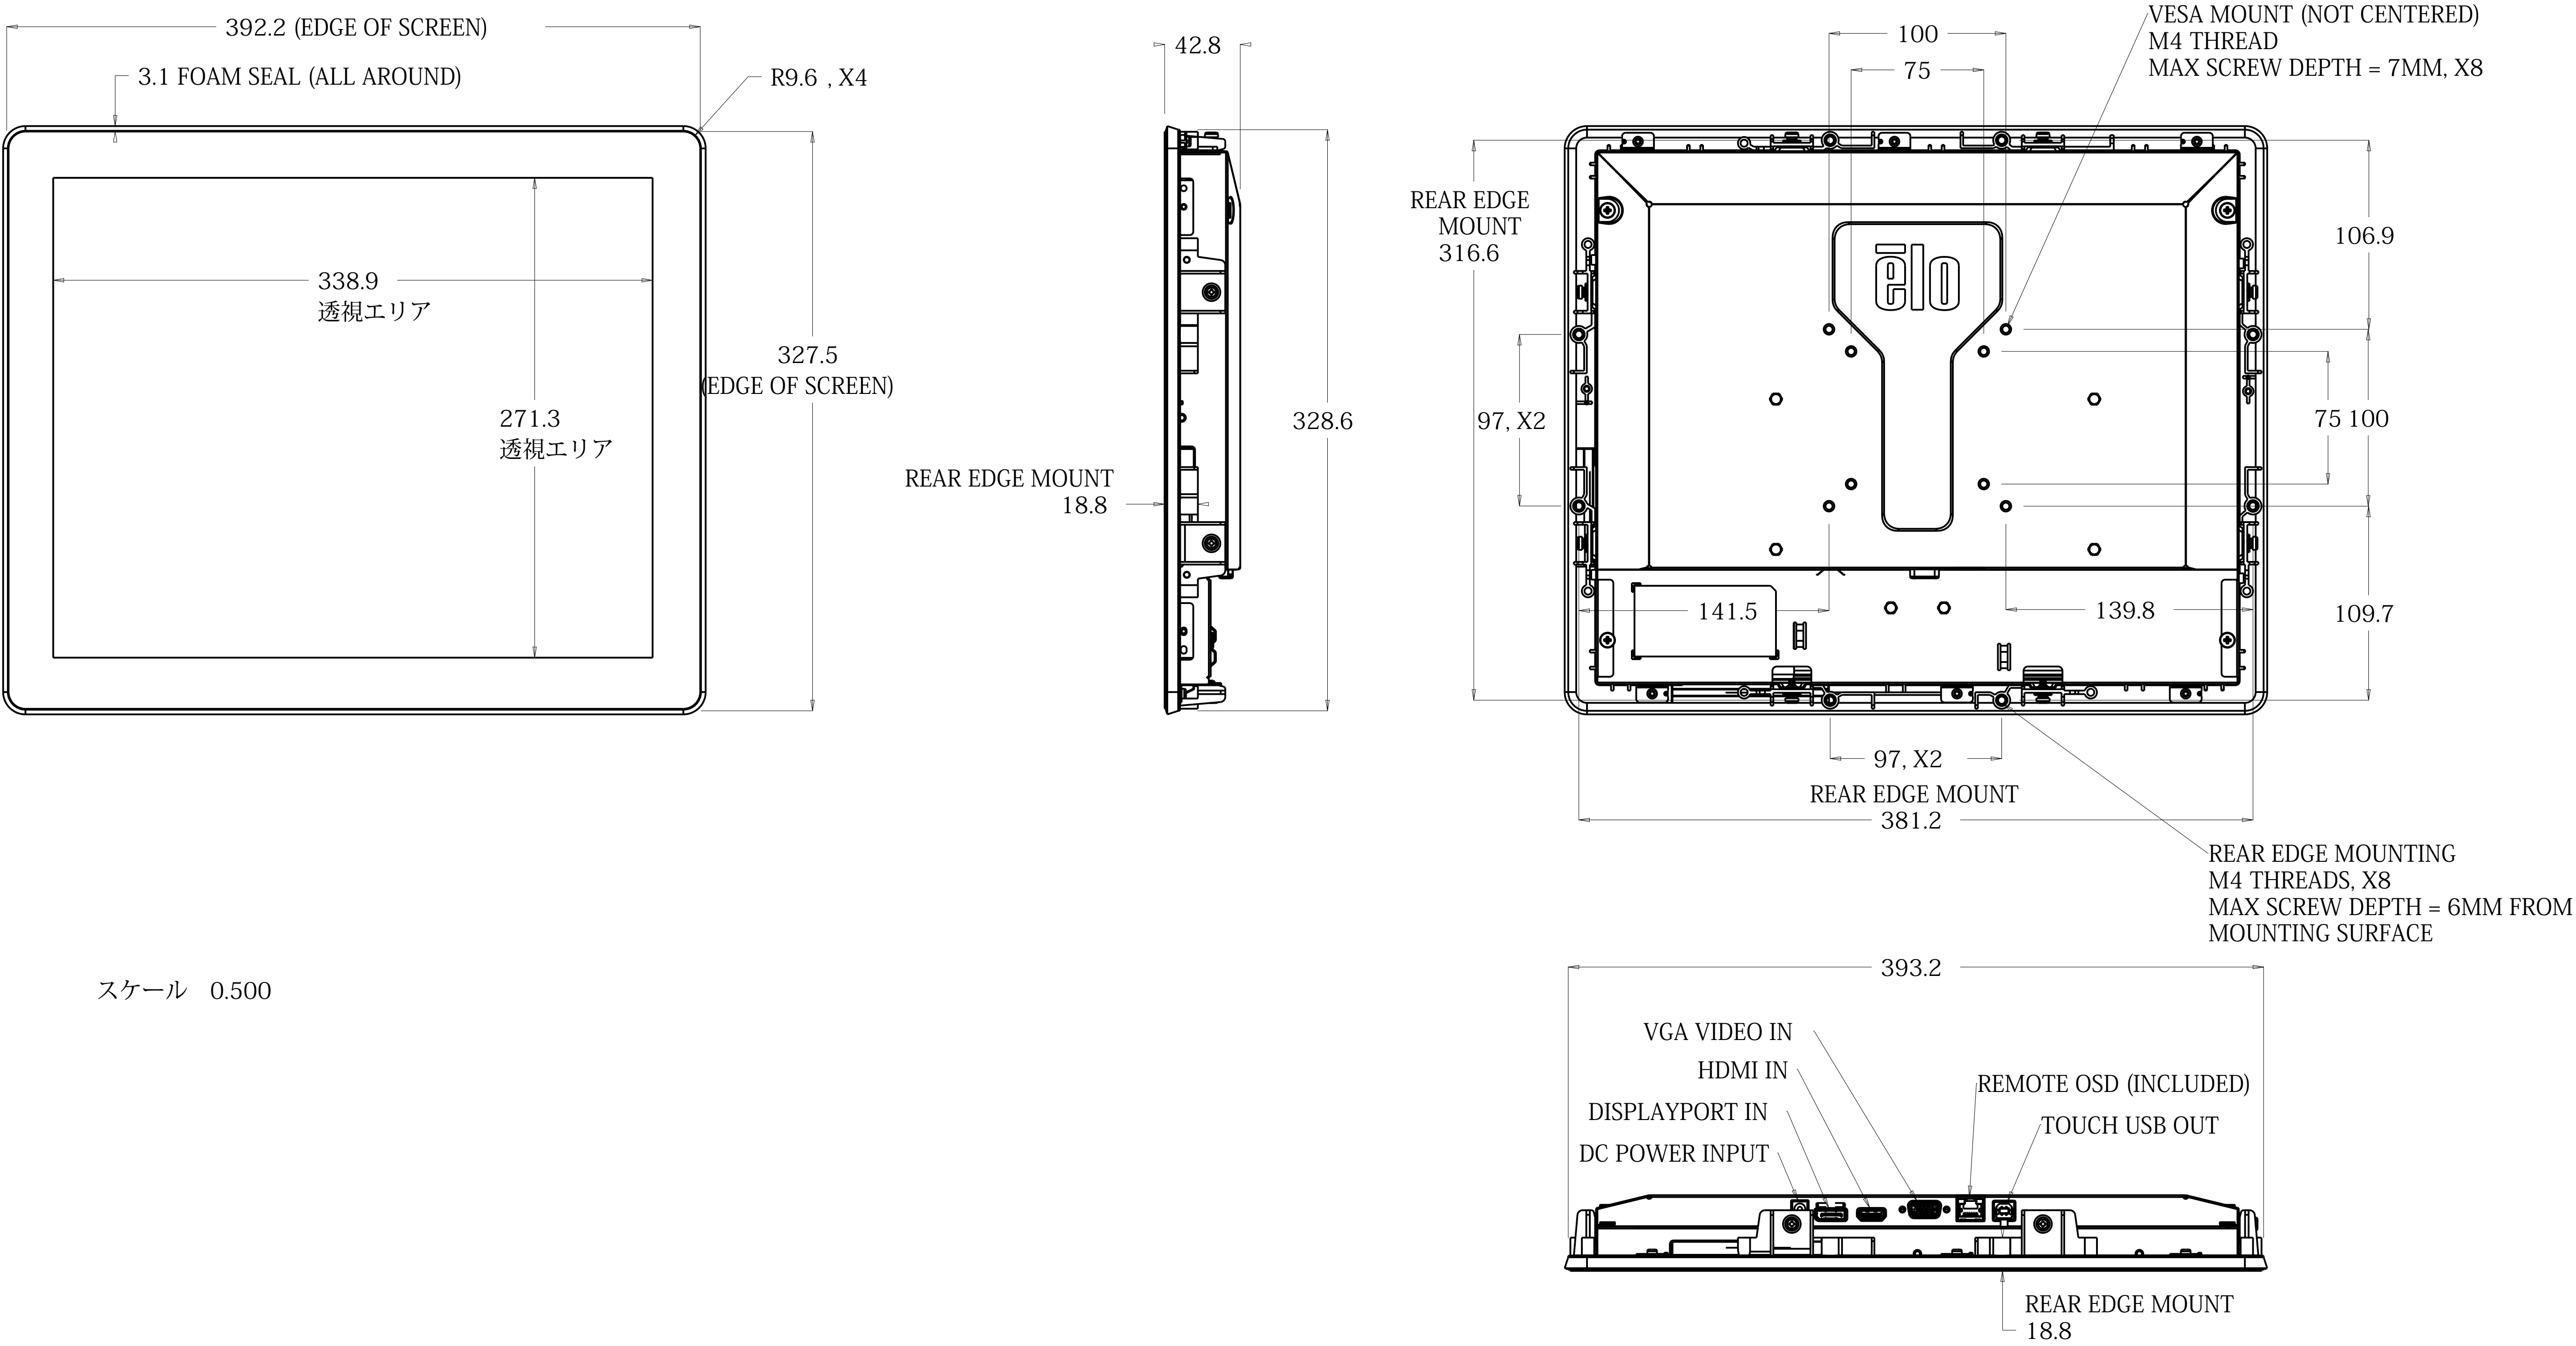
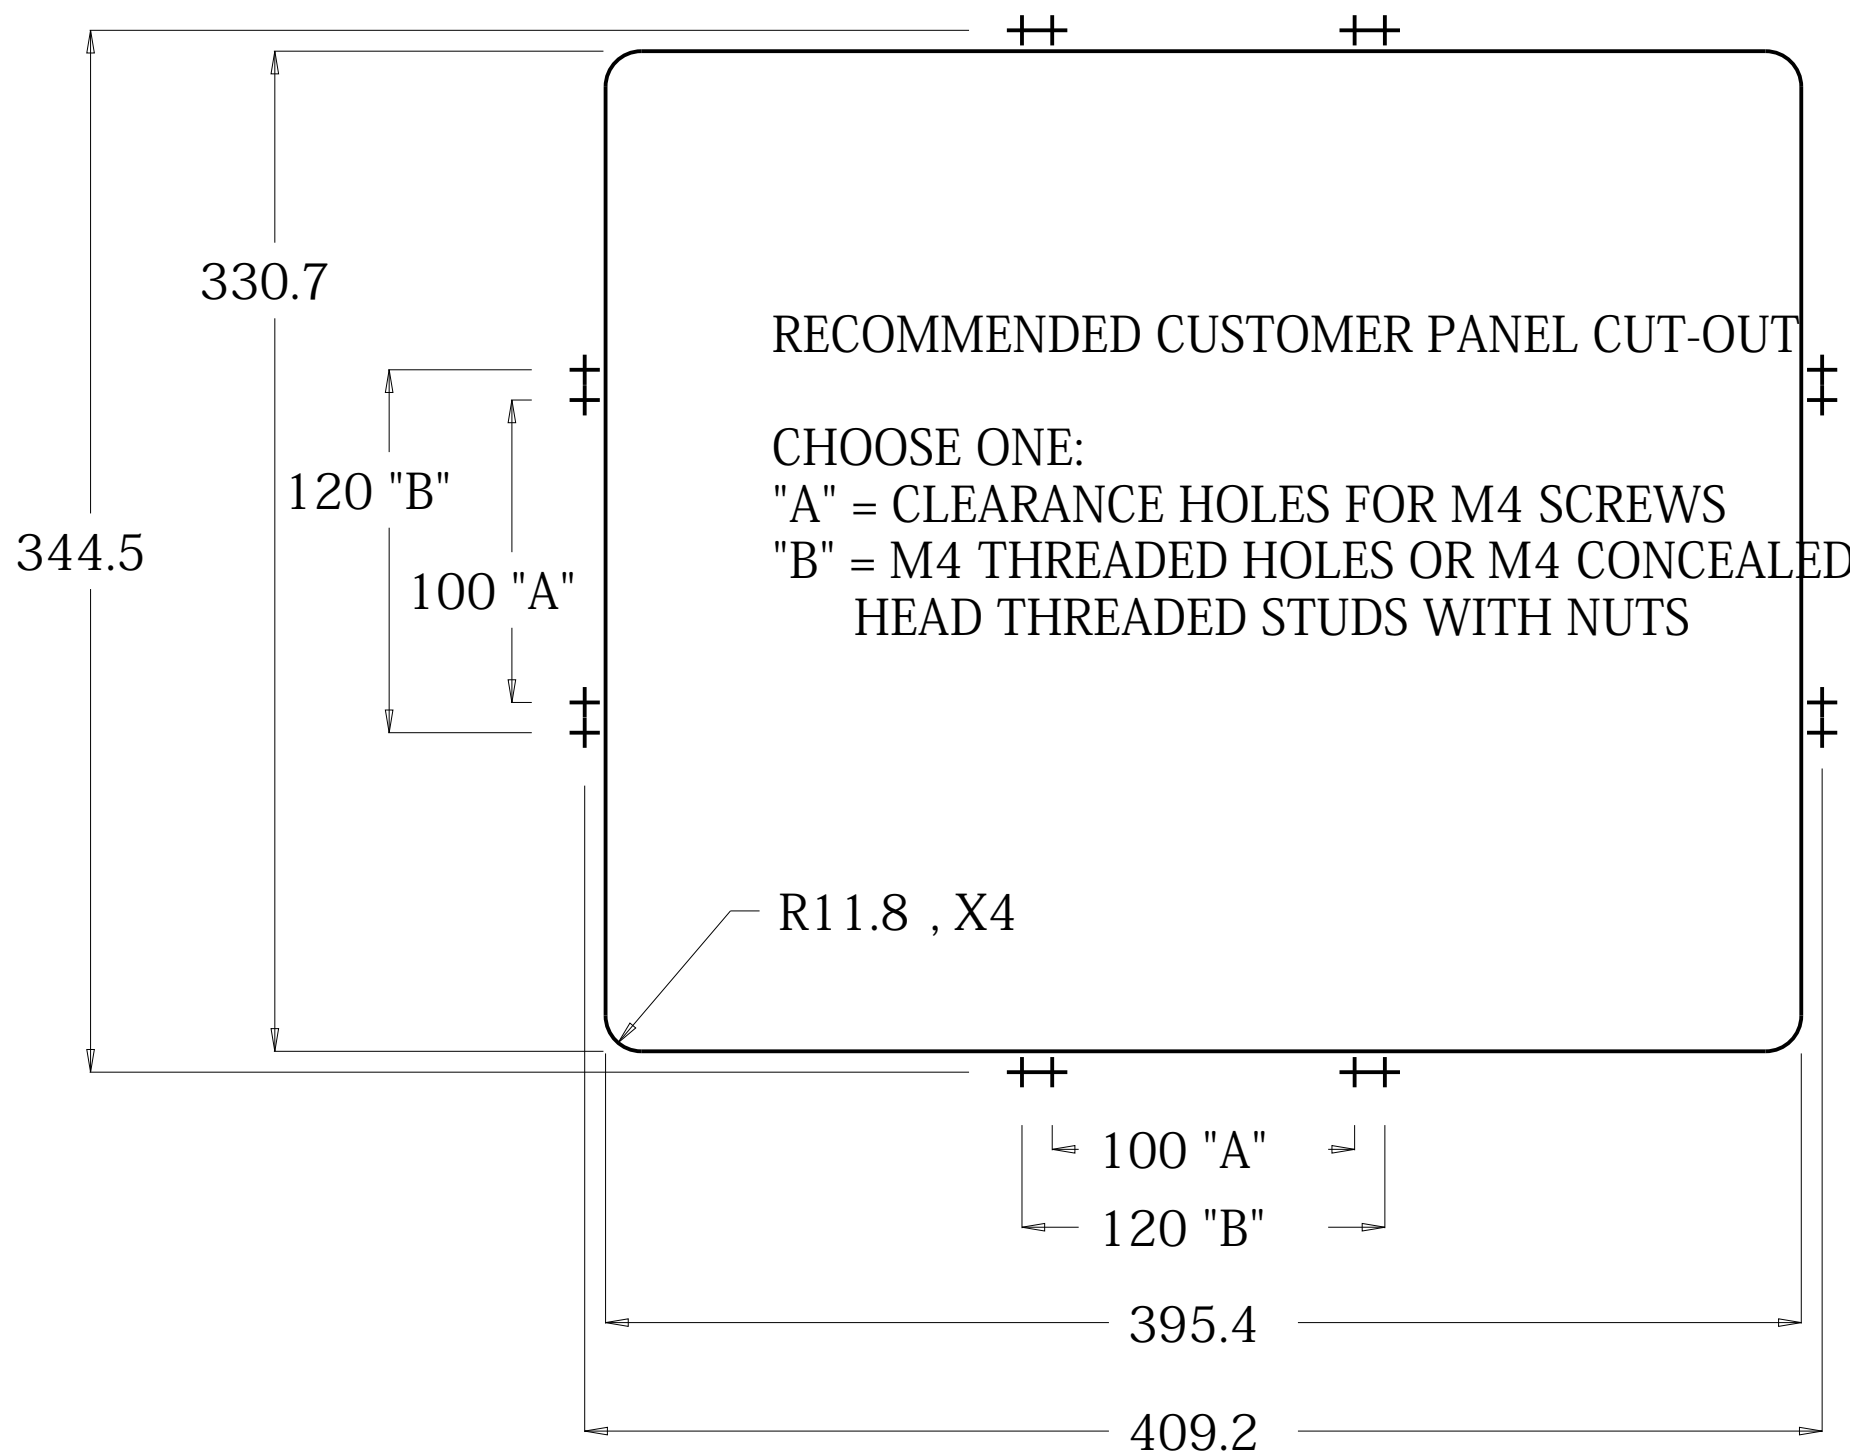
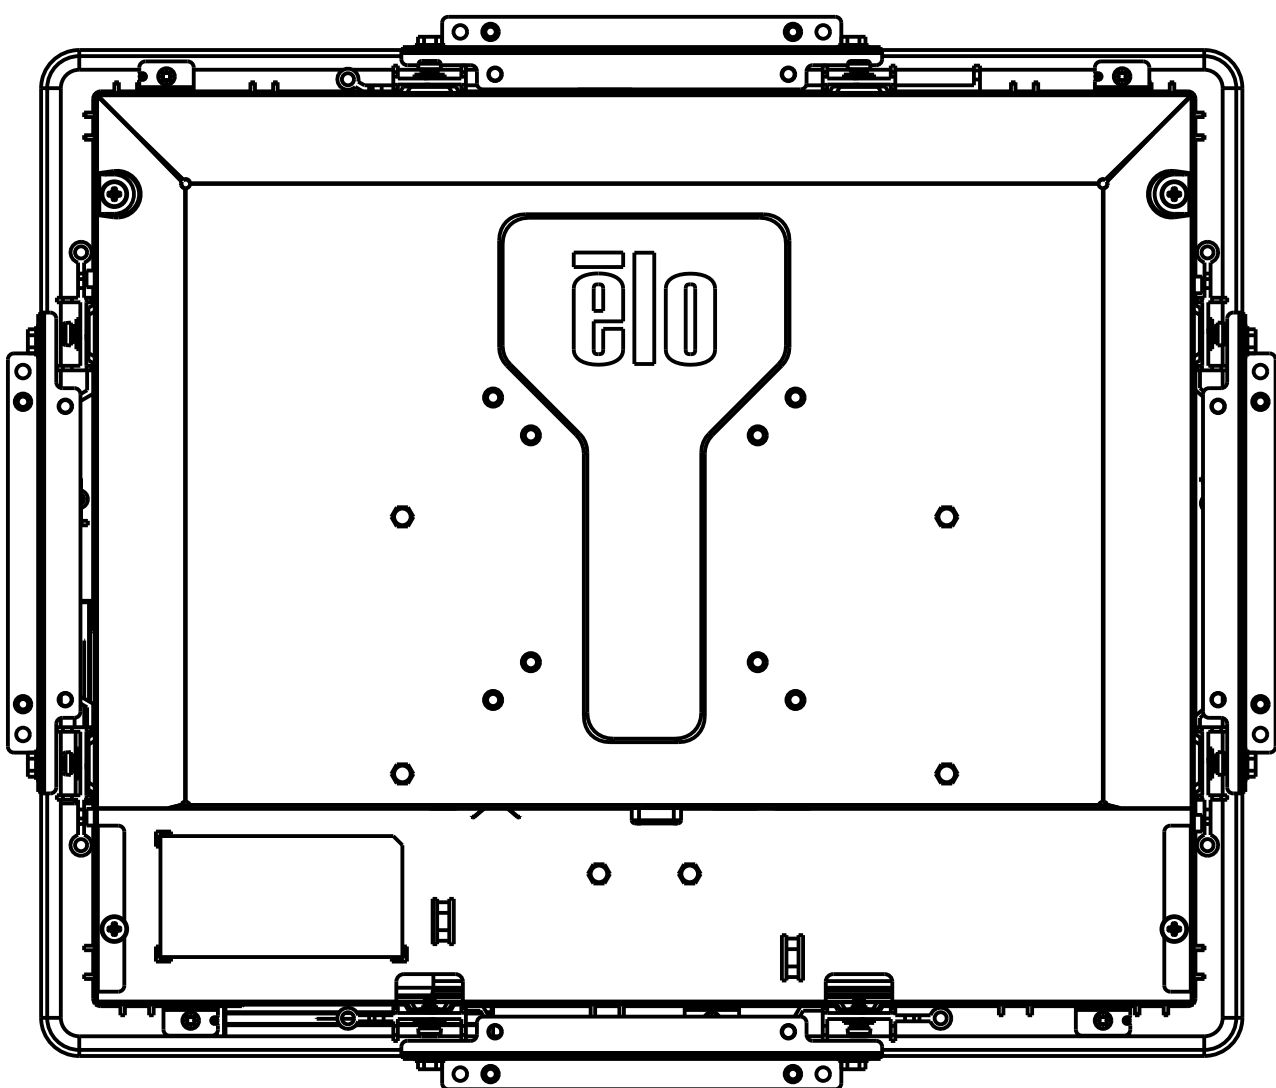


投影型静電容量方式モデル（ゼロベゼル） ET1790L-2UWB-O-MT-ZB-NPB-G


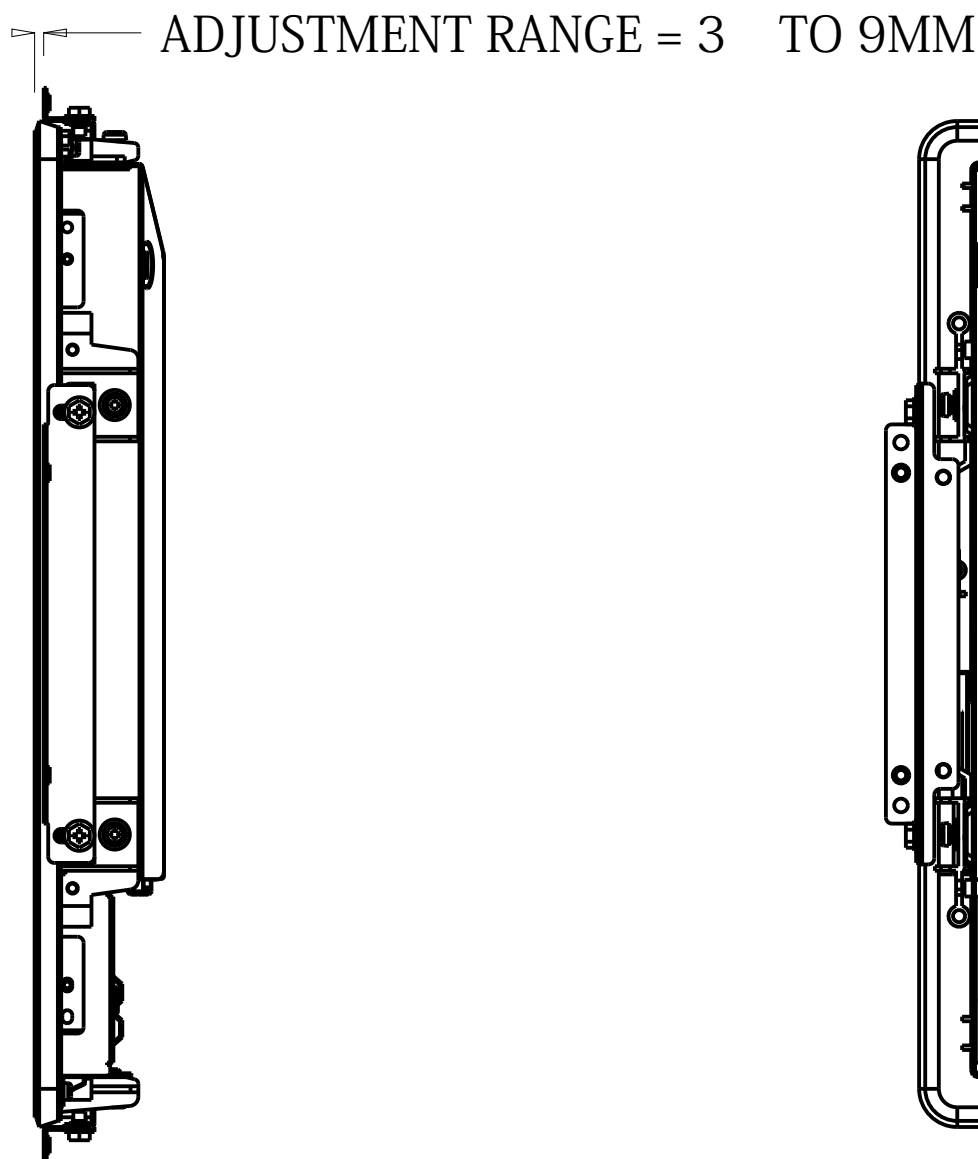


投影型静電容量方式モデル（ゼロベゼル） ET1790L-2UWB-0-MT-ZB-NPB-G


WITH FLUSH MOUNTING BRACKETS (4 INCLUDED)

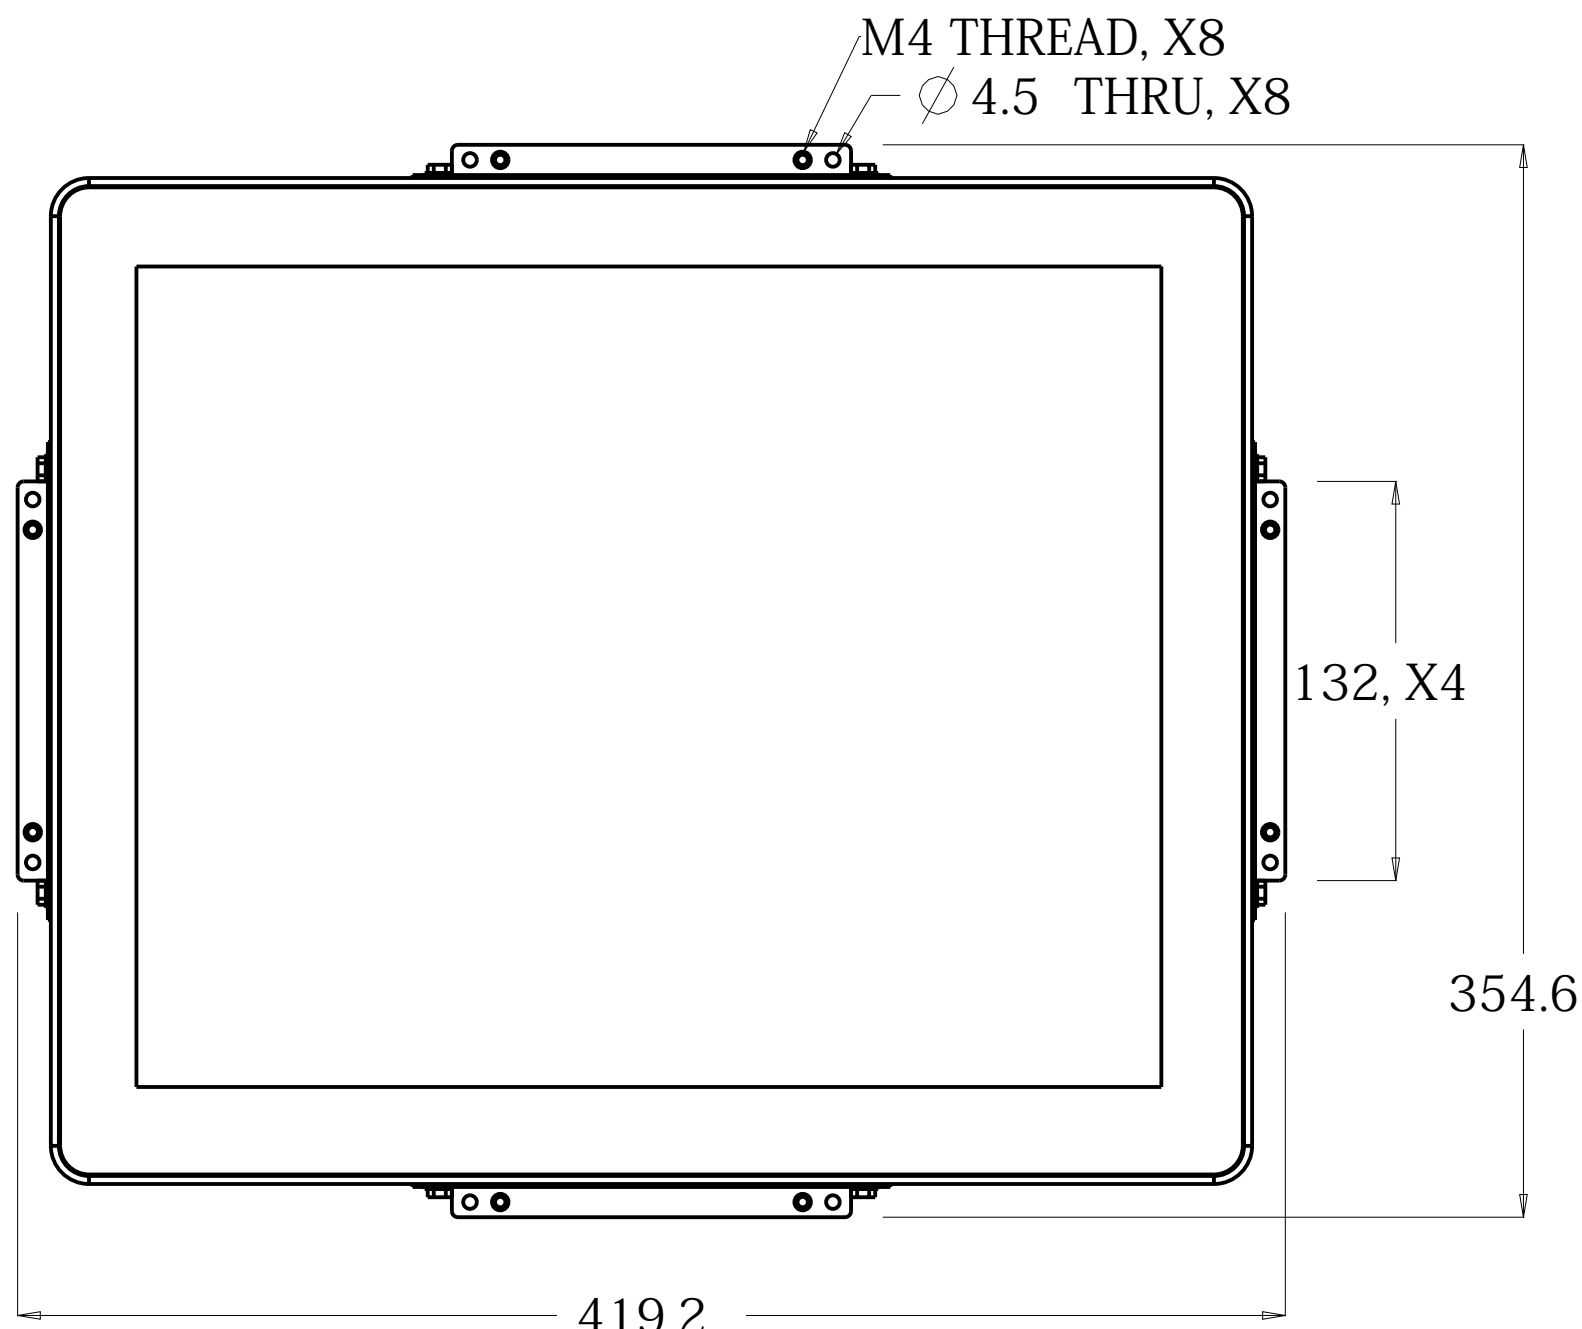

- INSTALLATION NOTES:
1. ATTACH BRACKET "A" TO CUSTOMER PANEL (ALL FOUR SIDES) WITH INCLUDED SCREWS
 2. ATTACH BRACKET "B" TO TOUCHMONITOR (ALL FOUR SIDES)
 3. PLACE TOUCHMONITOR INTO CUSTOMER PANEL OPENING, TAKING CARE NOT TO DAMAGE FOAM SEAL
 4. ADJUST DEPTH OF BRACKETS "B" SO THE MONITOR IS FLUSH WITH CUSTOMER PANEL
 5. SECURE TOUCHMONITOR TO BRACKET "B" FROM BEHIND WITH INCLUDED SCREWS



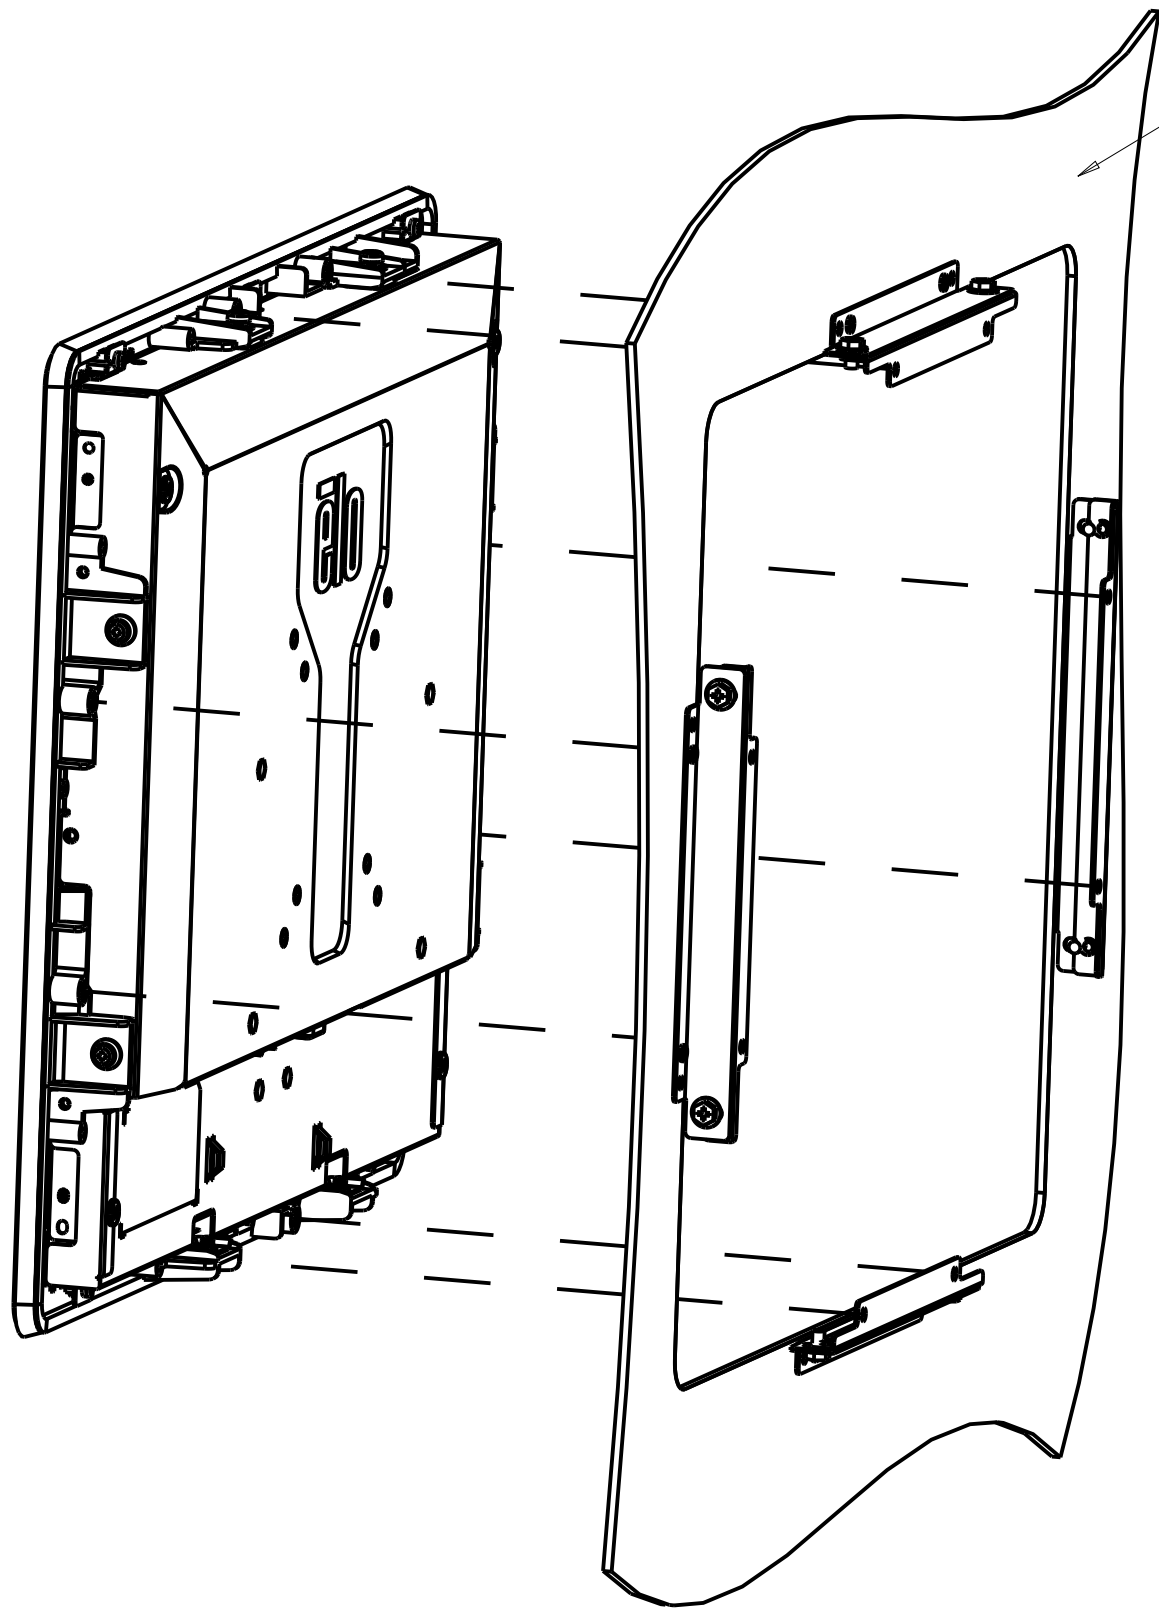
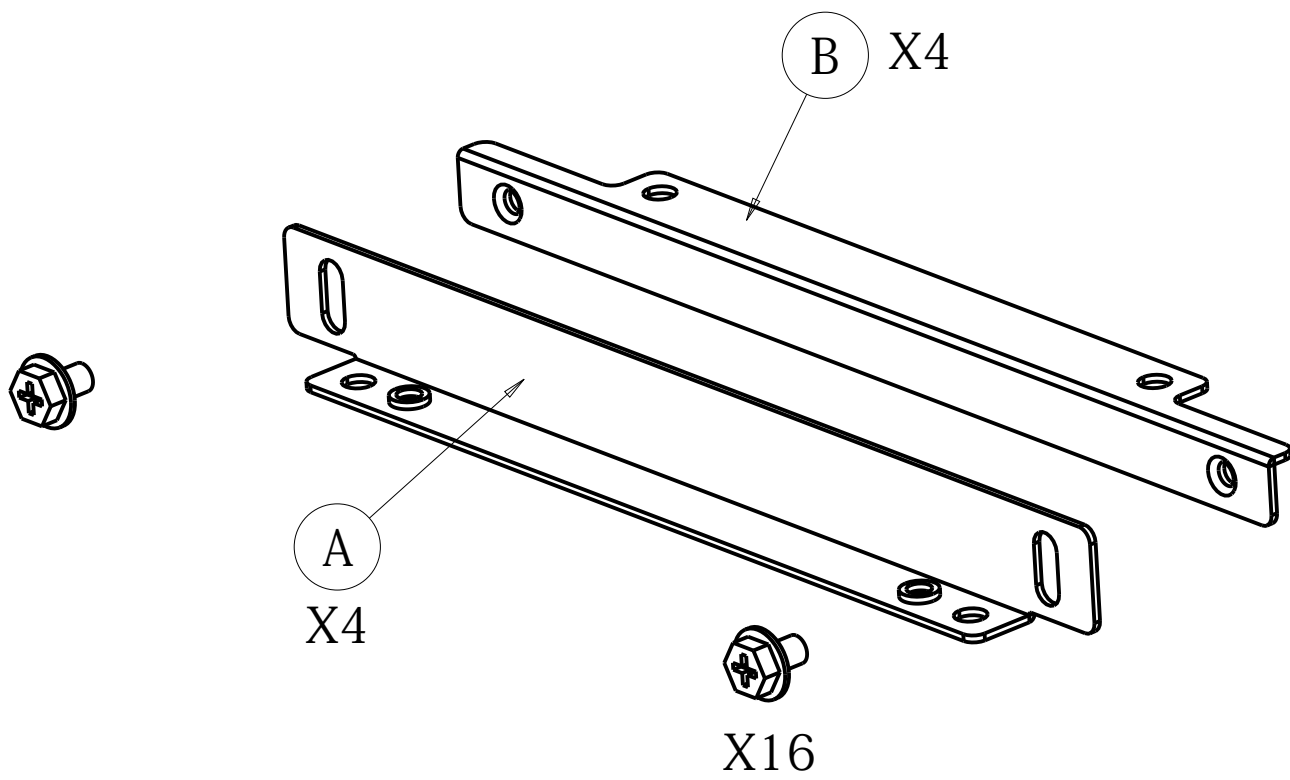


超音波表面弾性波方式ET1790L-8CWB-1-ST-NPB-G及び5線式抵抗膜方式モデルET1790L-7CWB-1-ST-NPB-G

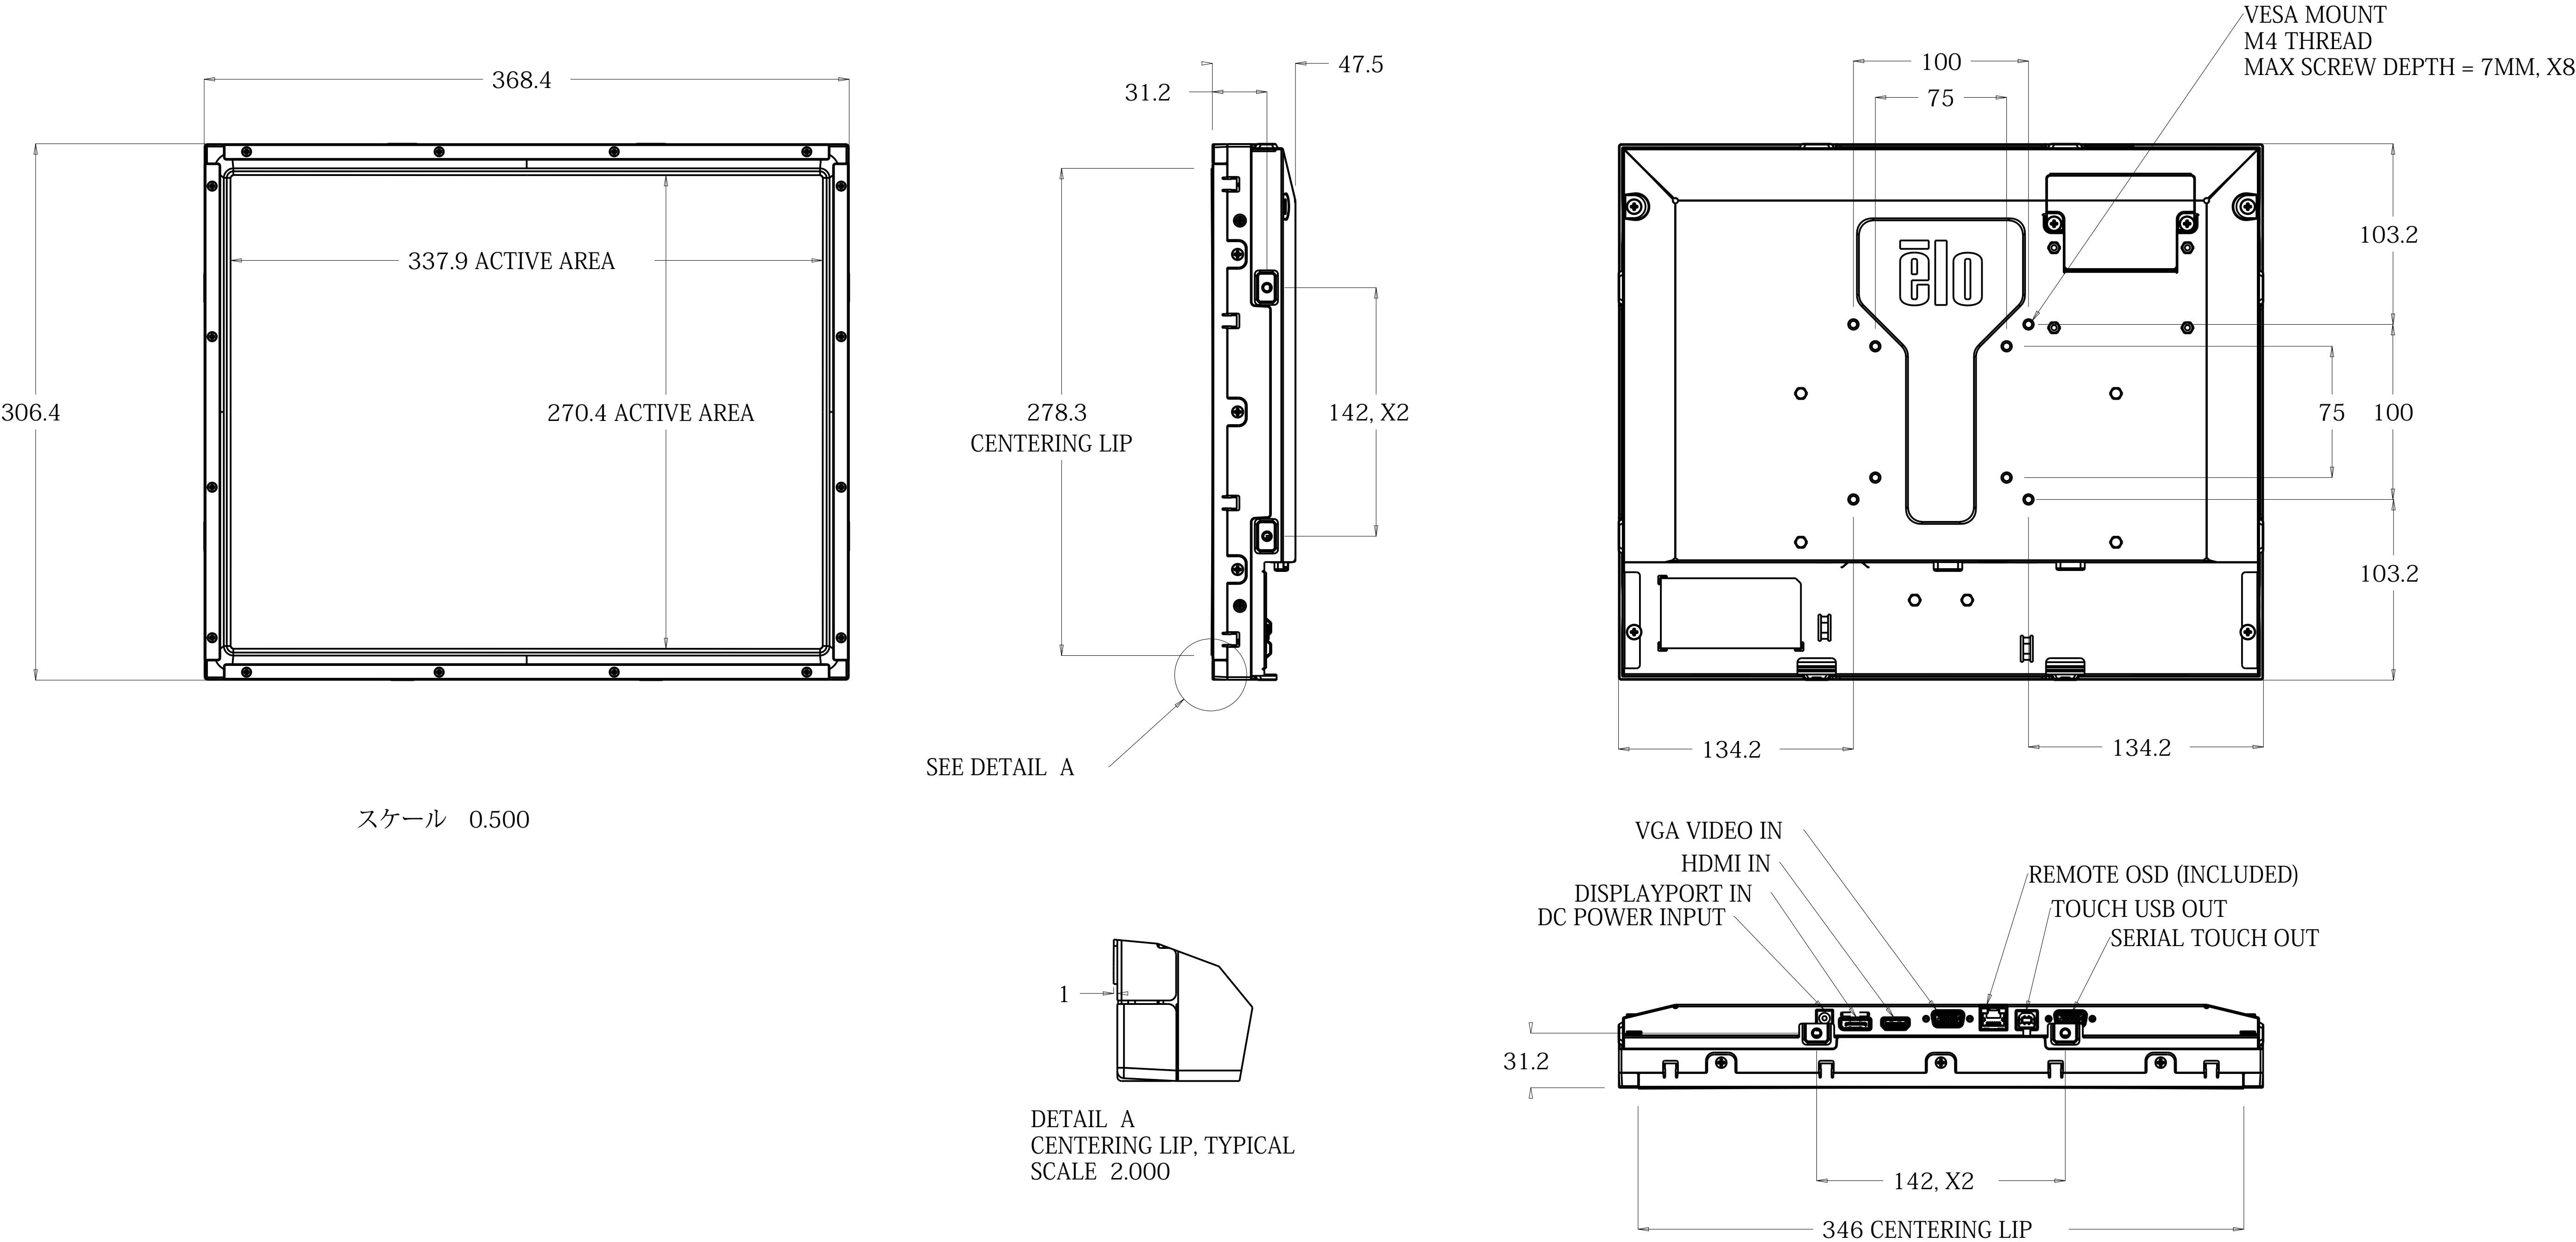

超音波表面弾性波方式ET1790L-8CWB-1-ST-NPB-G及び5線式抵抗膜方式モデルET1790L-7CWB-1-ST-NPB-G

WITH SIDE MOUNTING BRACKETS (2 INCLUDED)

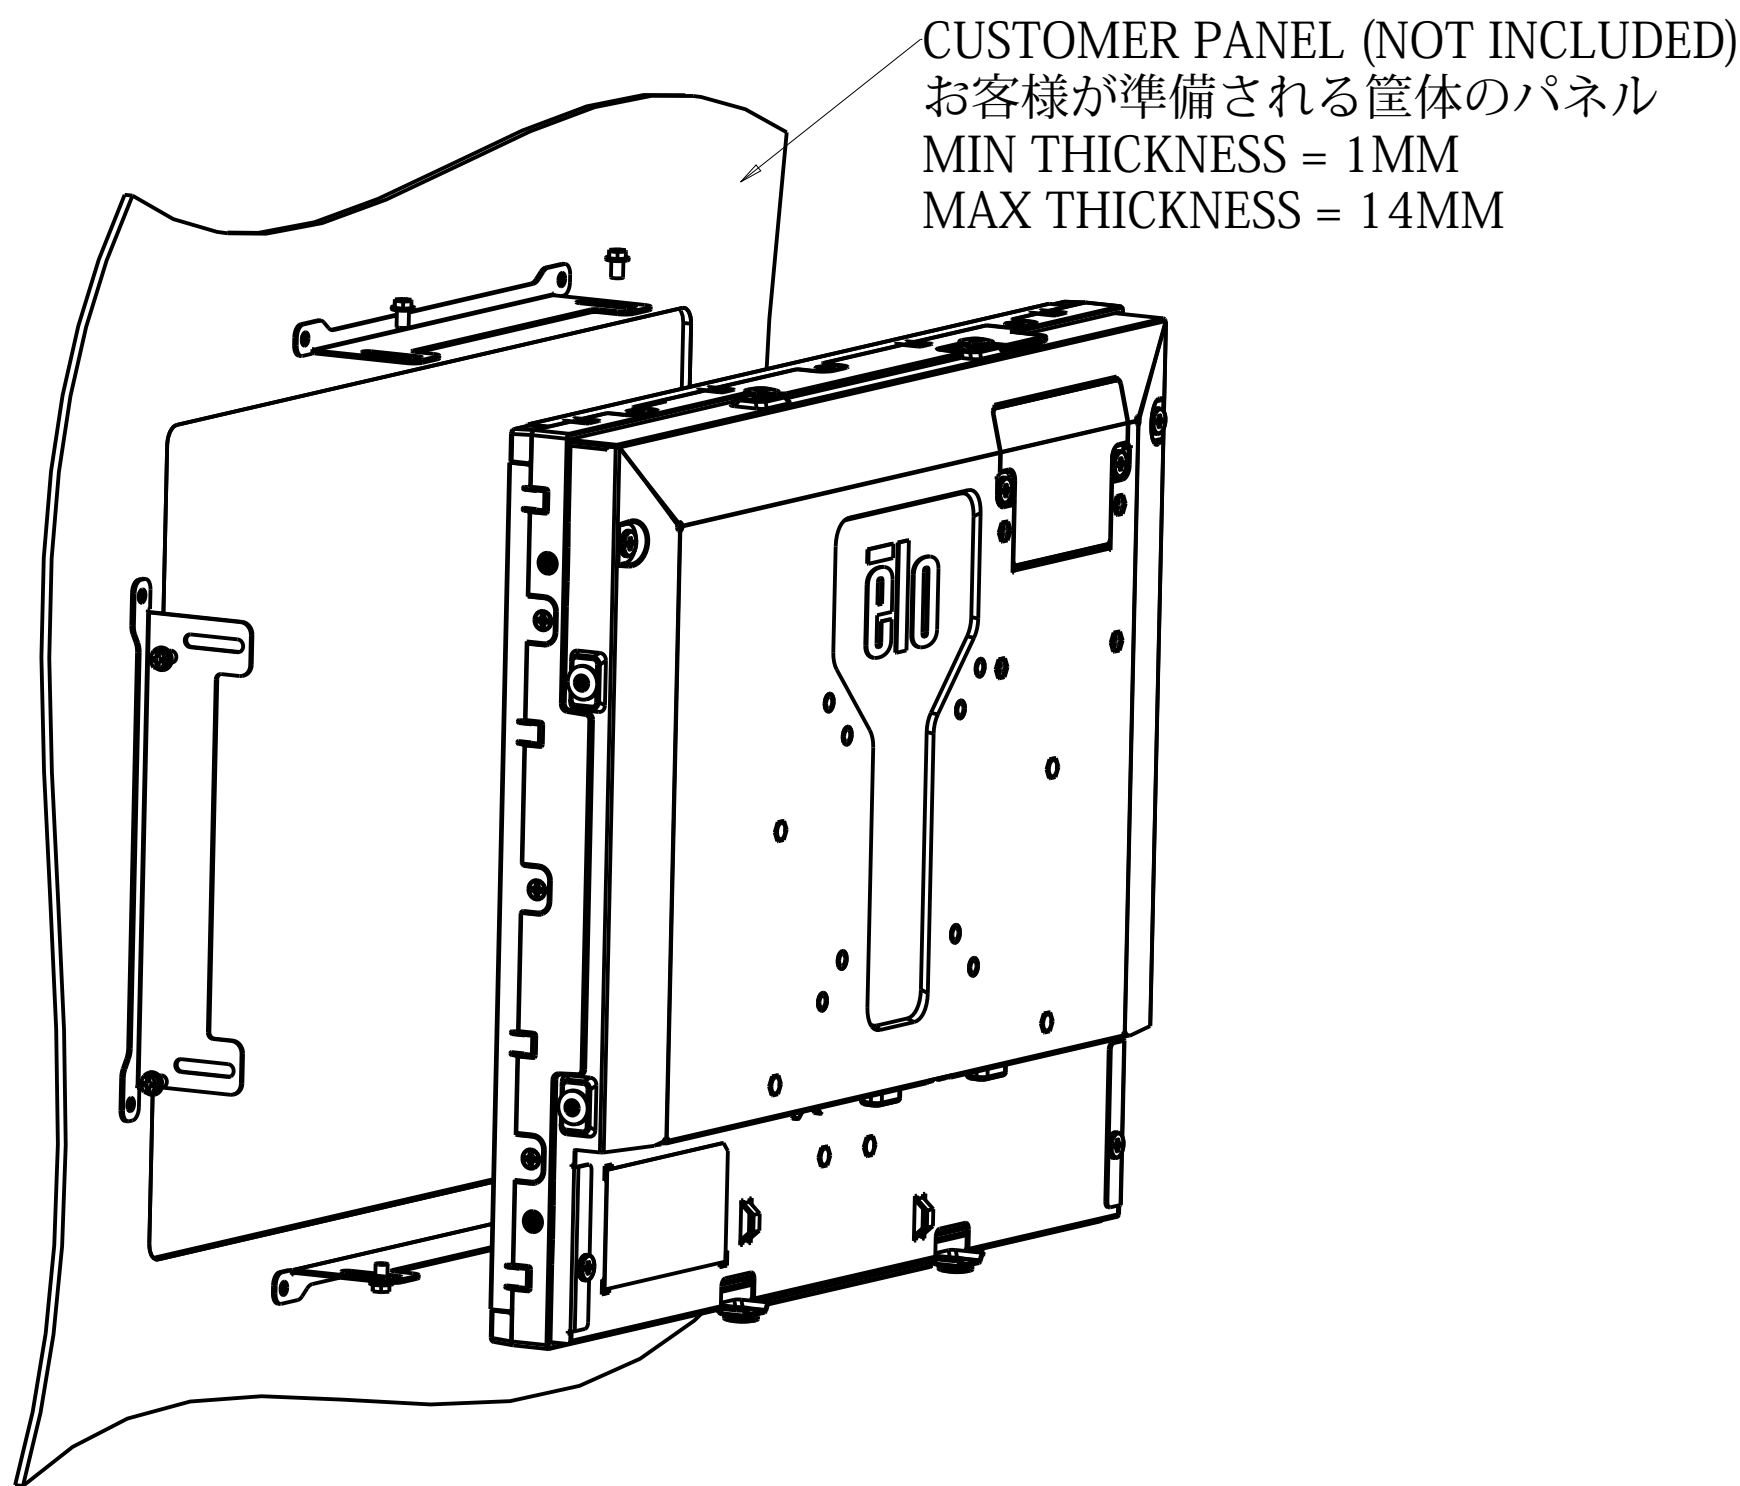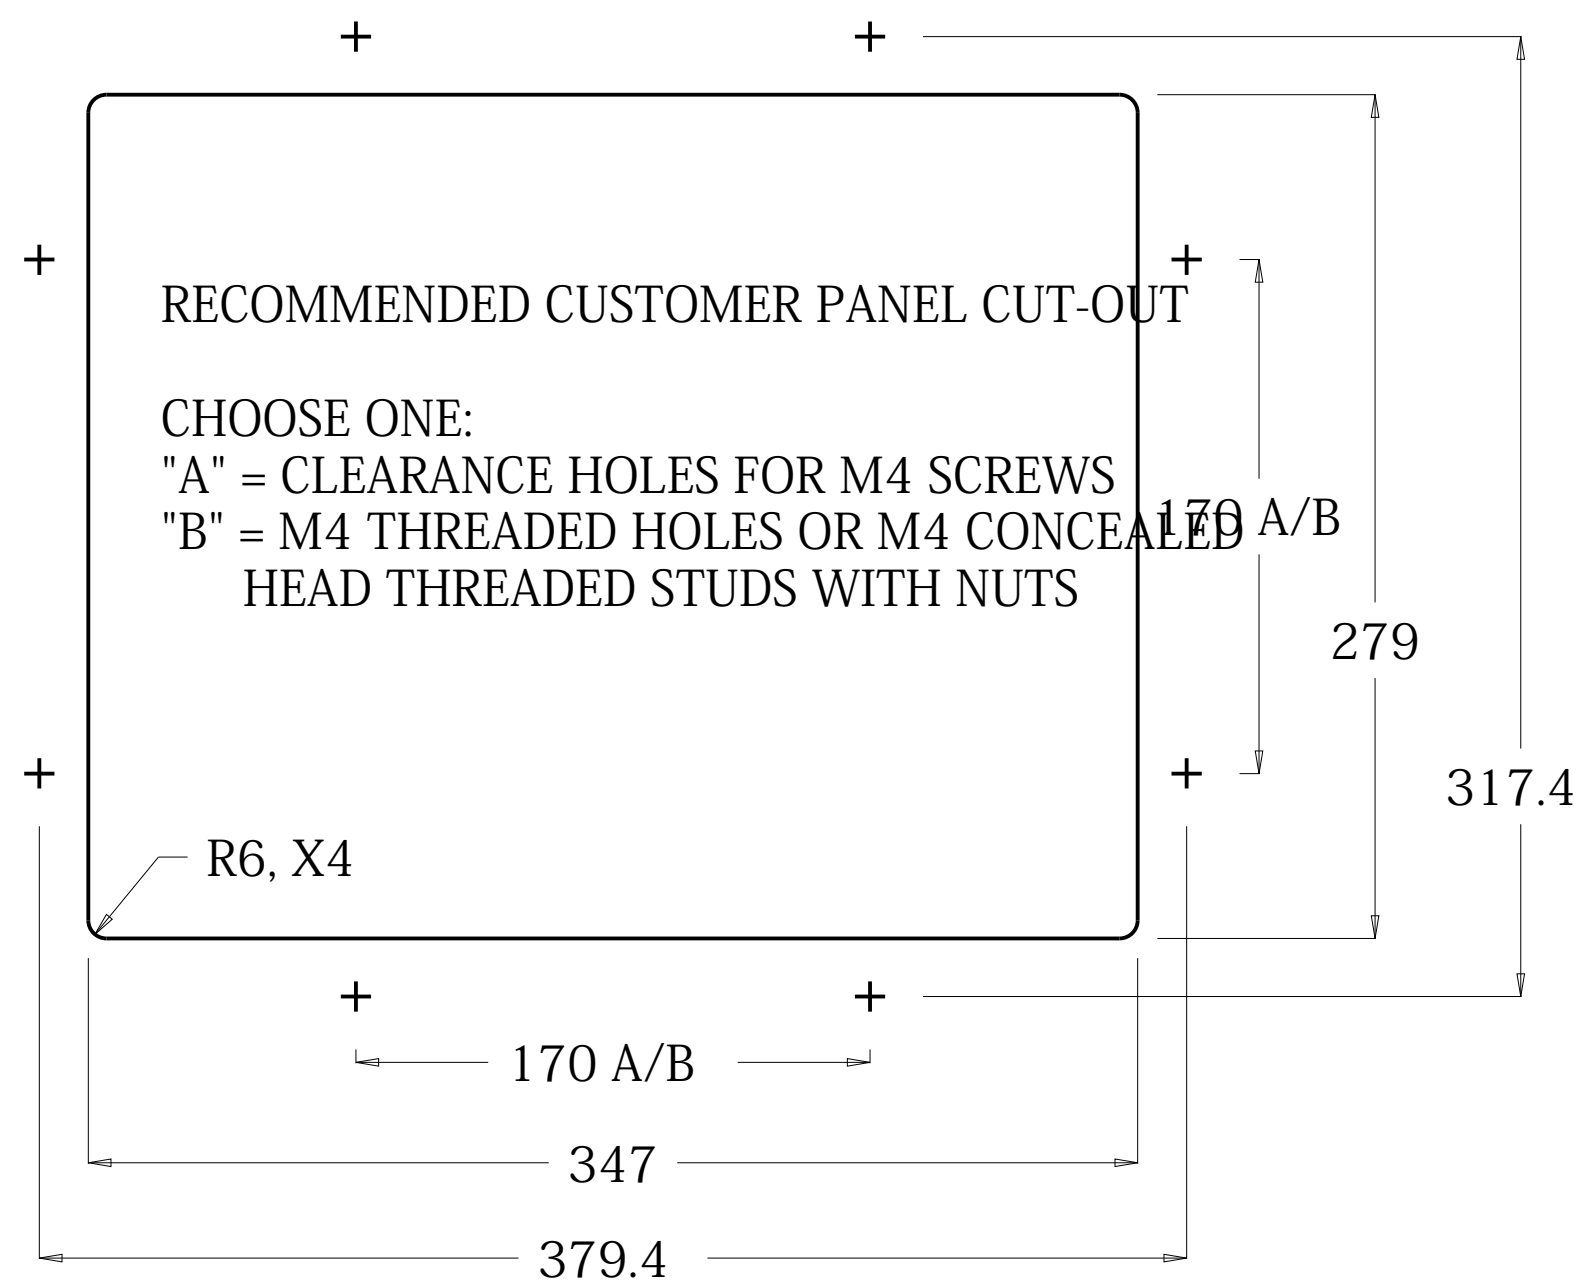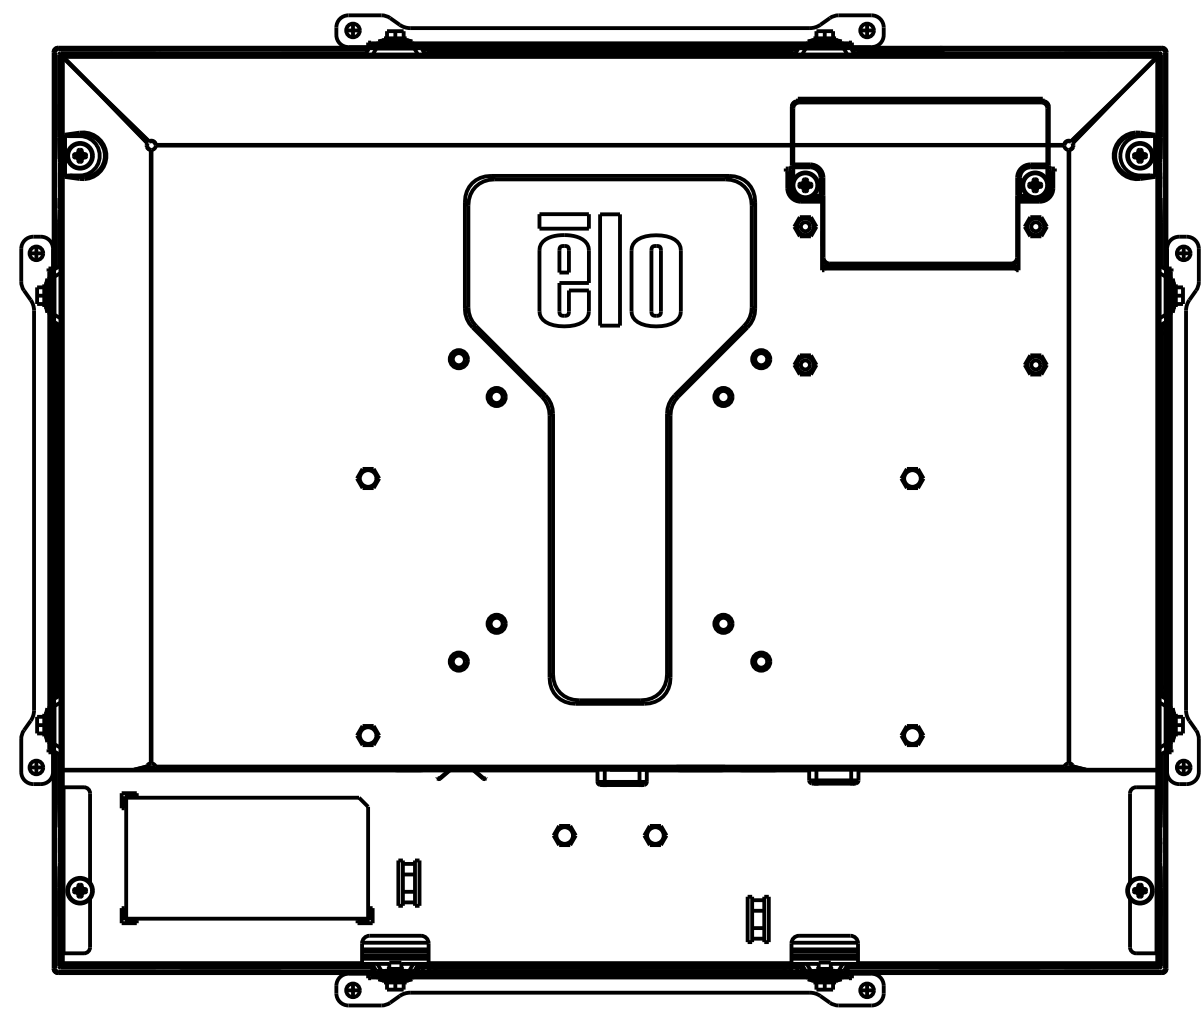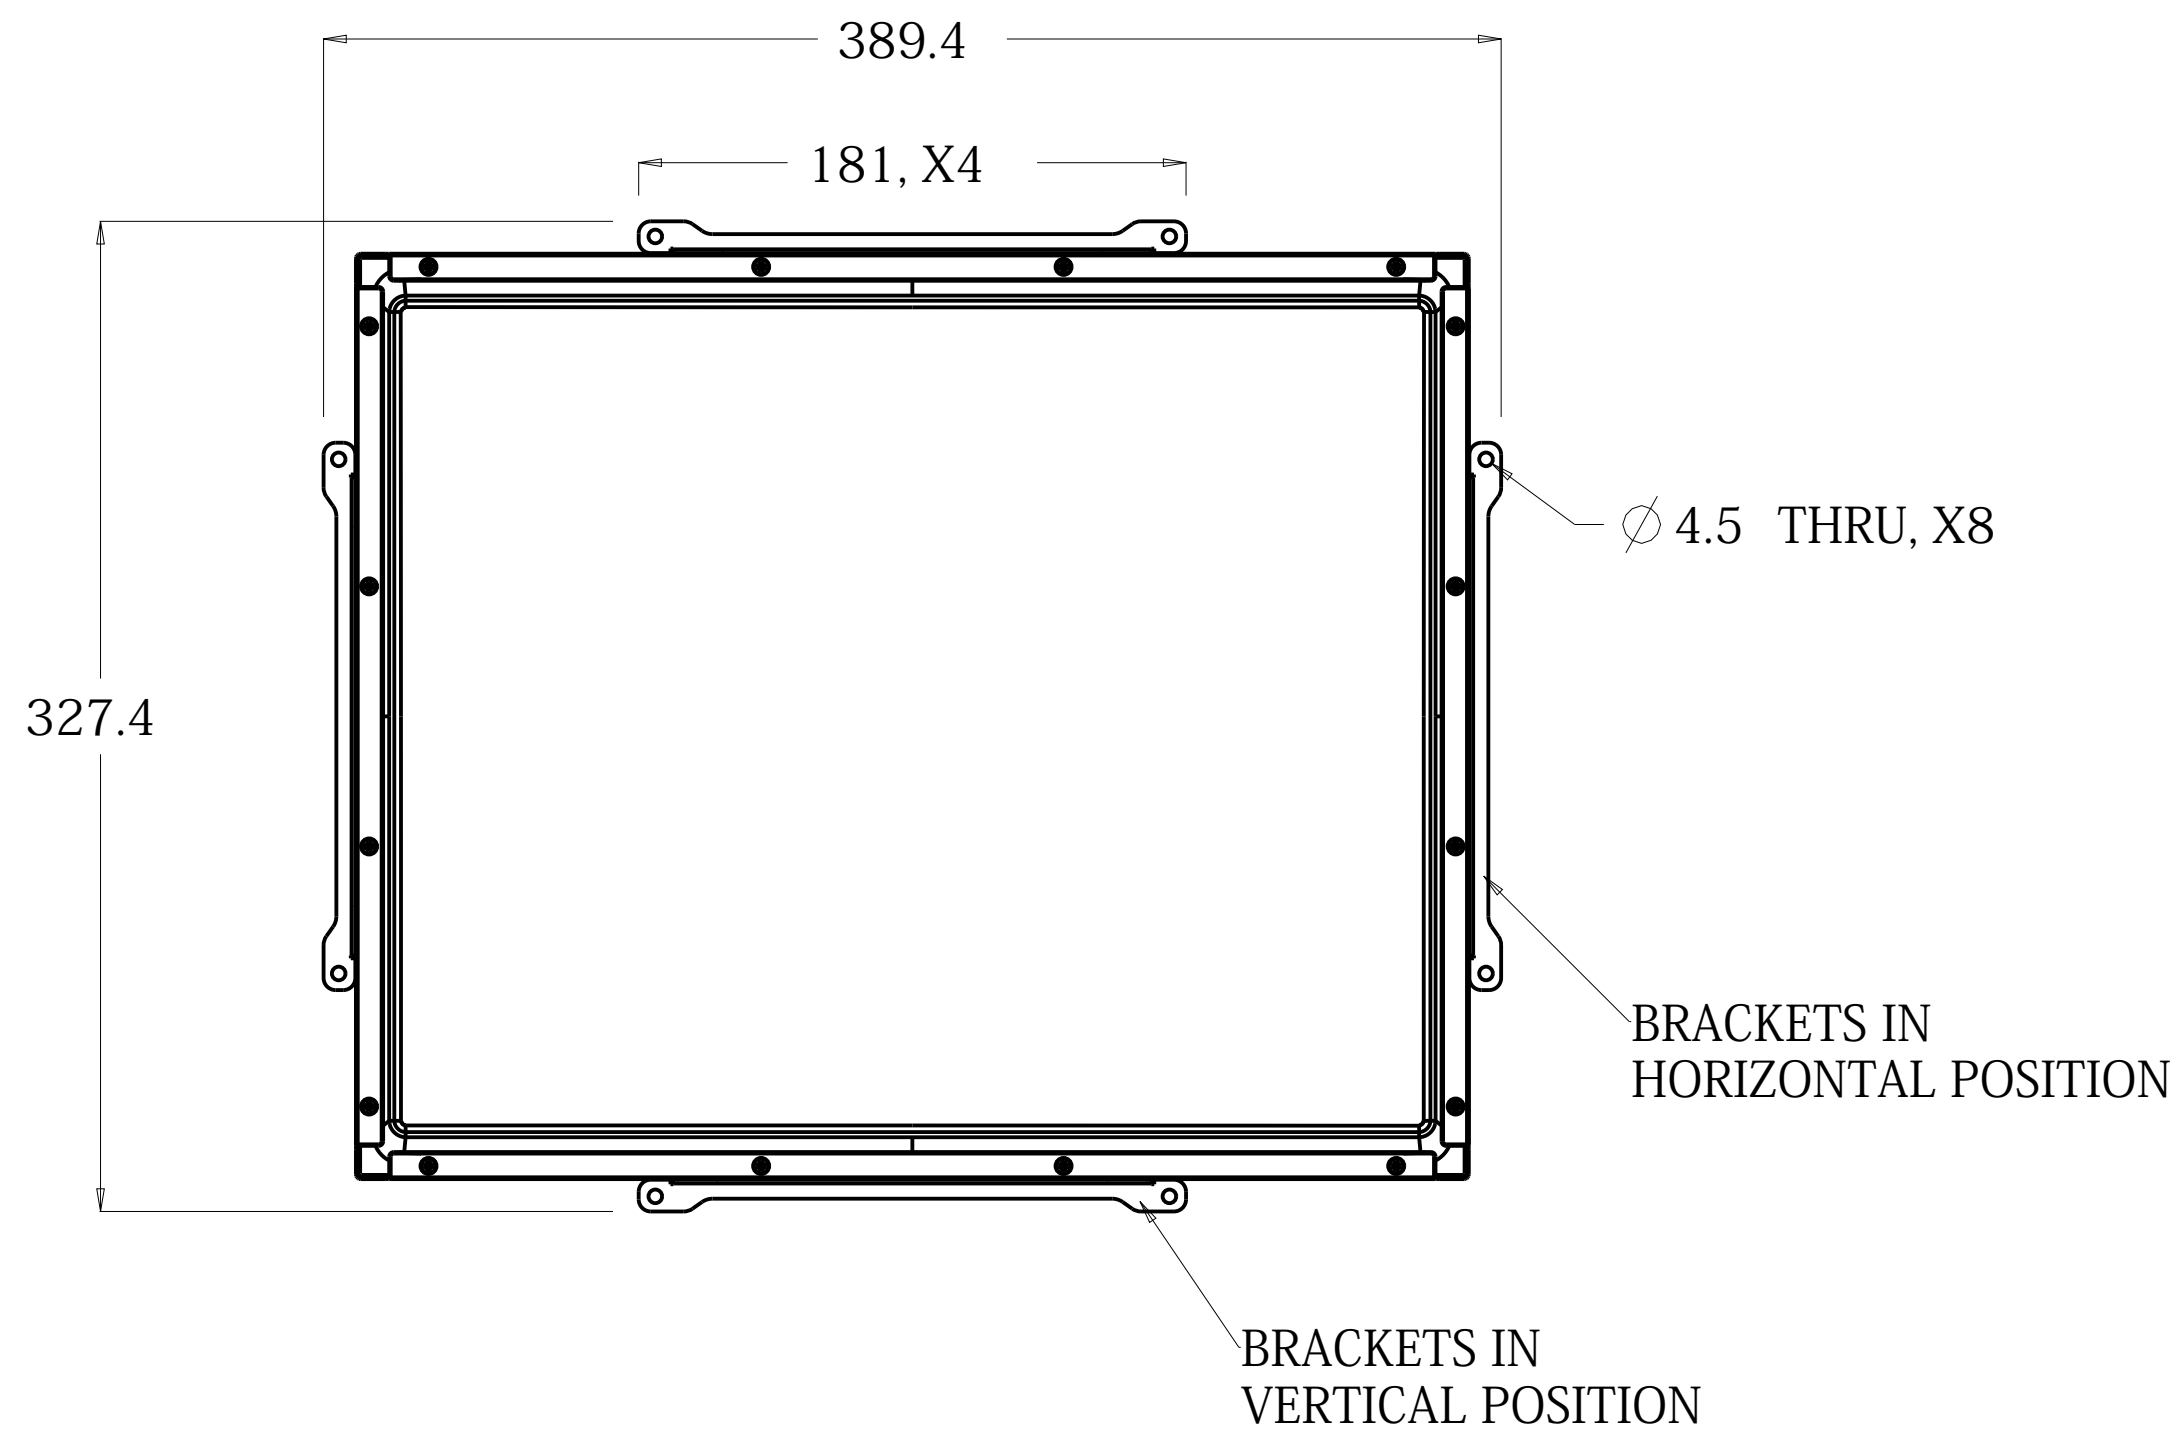

FRONT MOUNT KIT P/N E860319 FOR
超音波表面弾性波方式ET1790L-8CWB-1-ST-NPB-G及び5線式抵抗膜方式モデルET1790L-7CWB-1-ST-NPB-G ONLY
(ORDERED SEPARATELY, CUSTOMER ASSEMBLED)

