



投影型静電容量方式モデル（ゼロベゼル）ET2094L-2UWB-0-MT-ZB-NPB-G



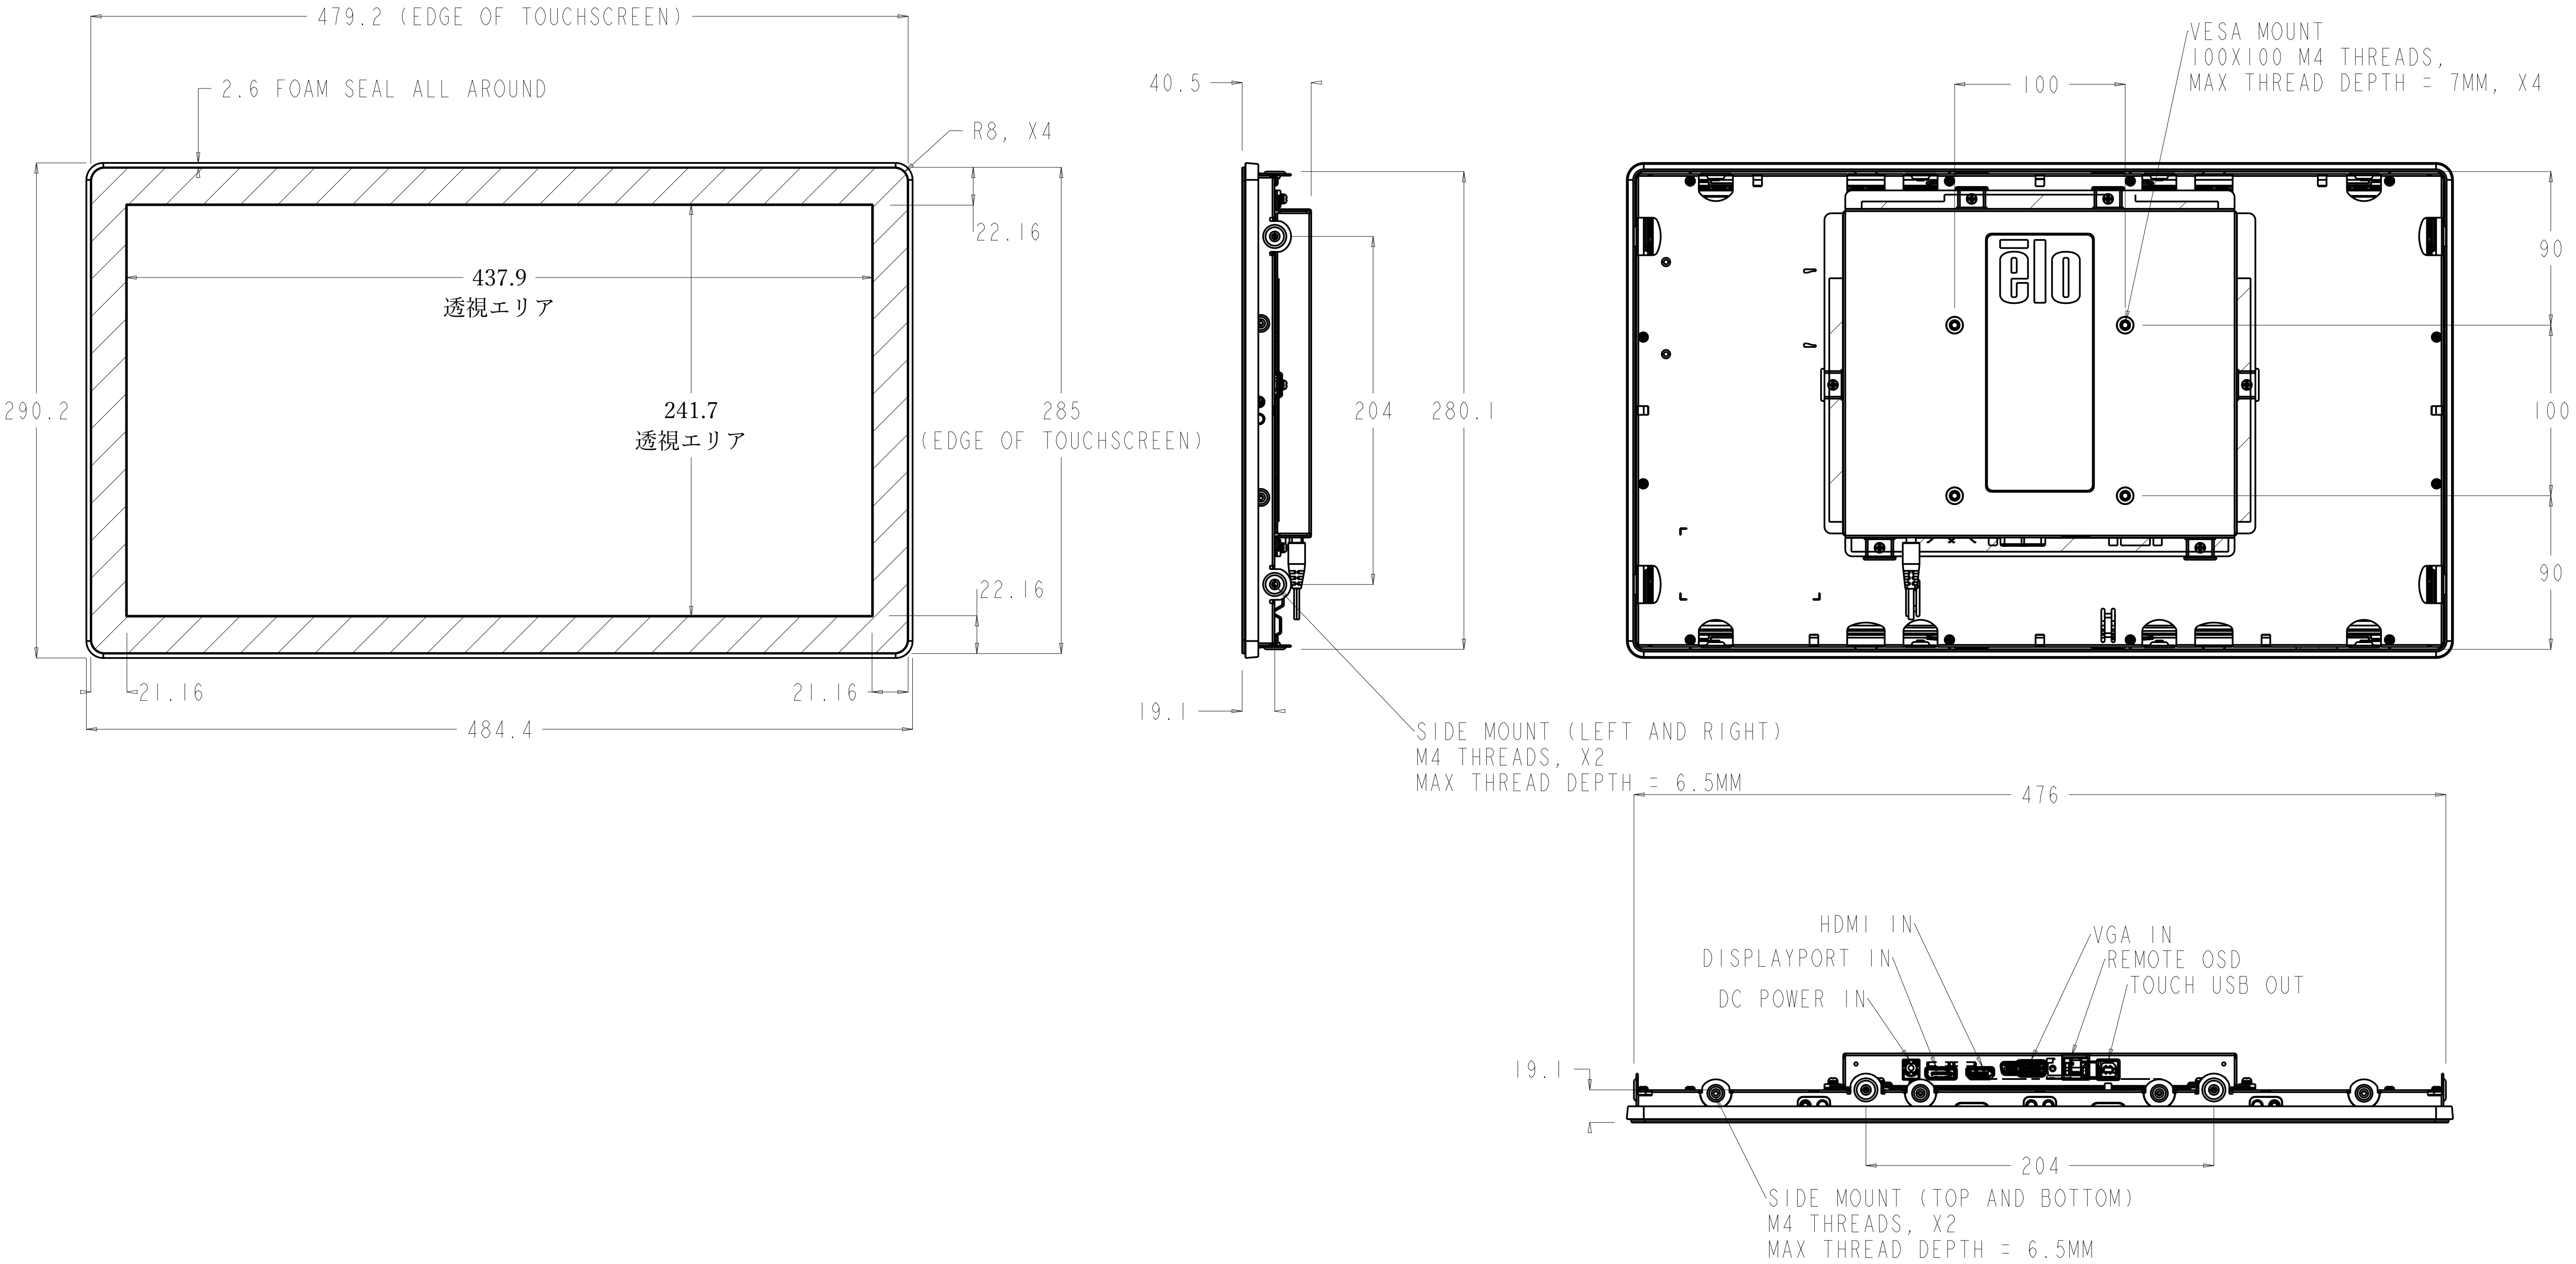


投影型静電容量方式モデル（ゼロベゼル） ET2094L-2UWB-0-MT-ZB-NPB-G


WITH FLUSH MOUNTING BRACKETS (4 INCLUDED)

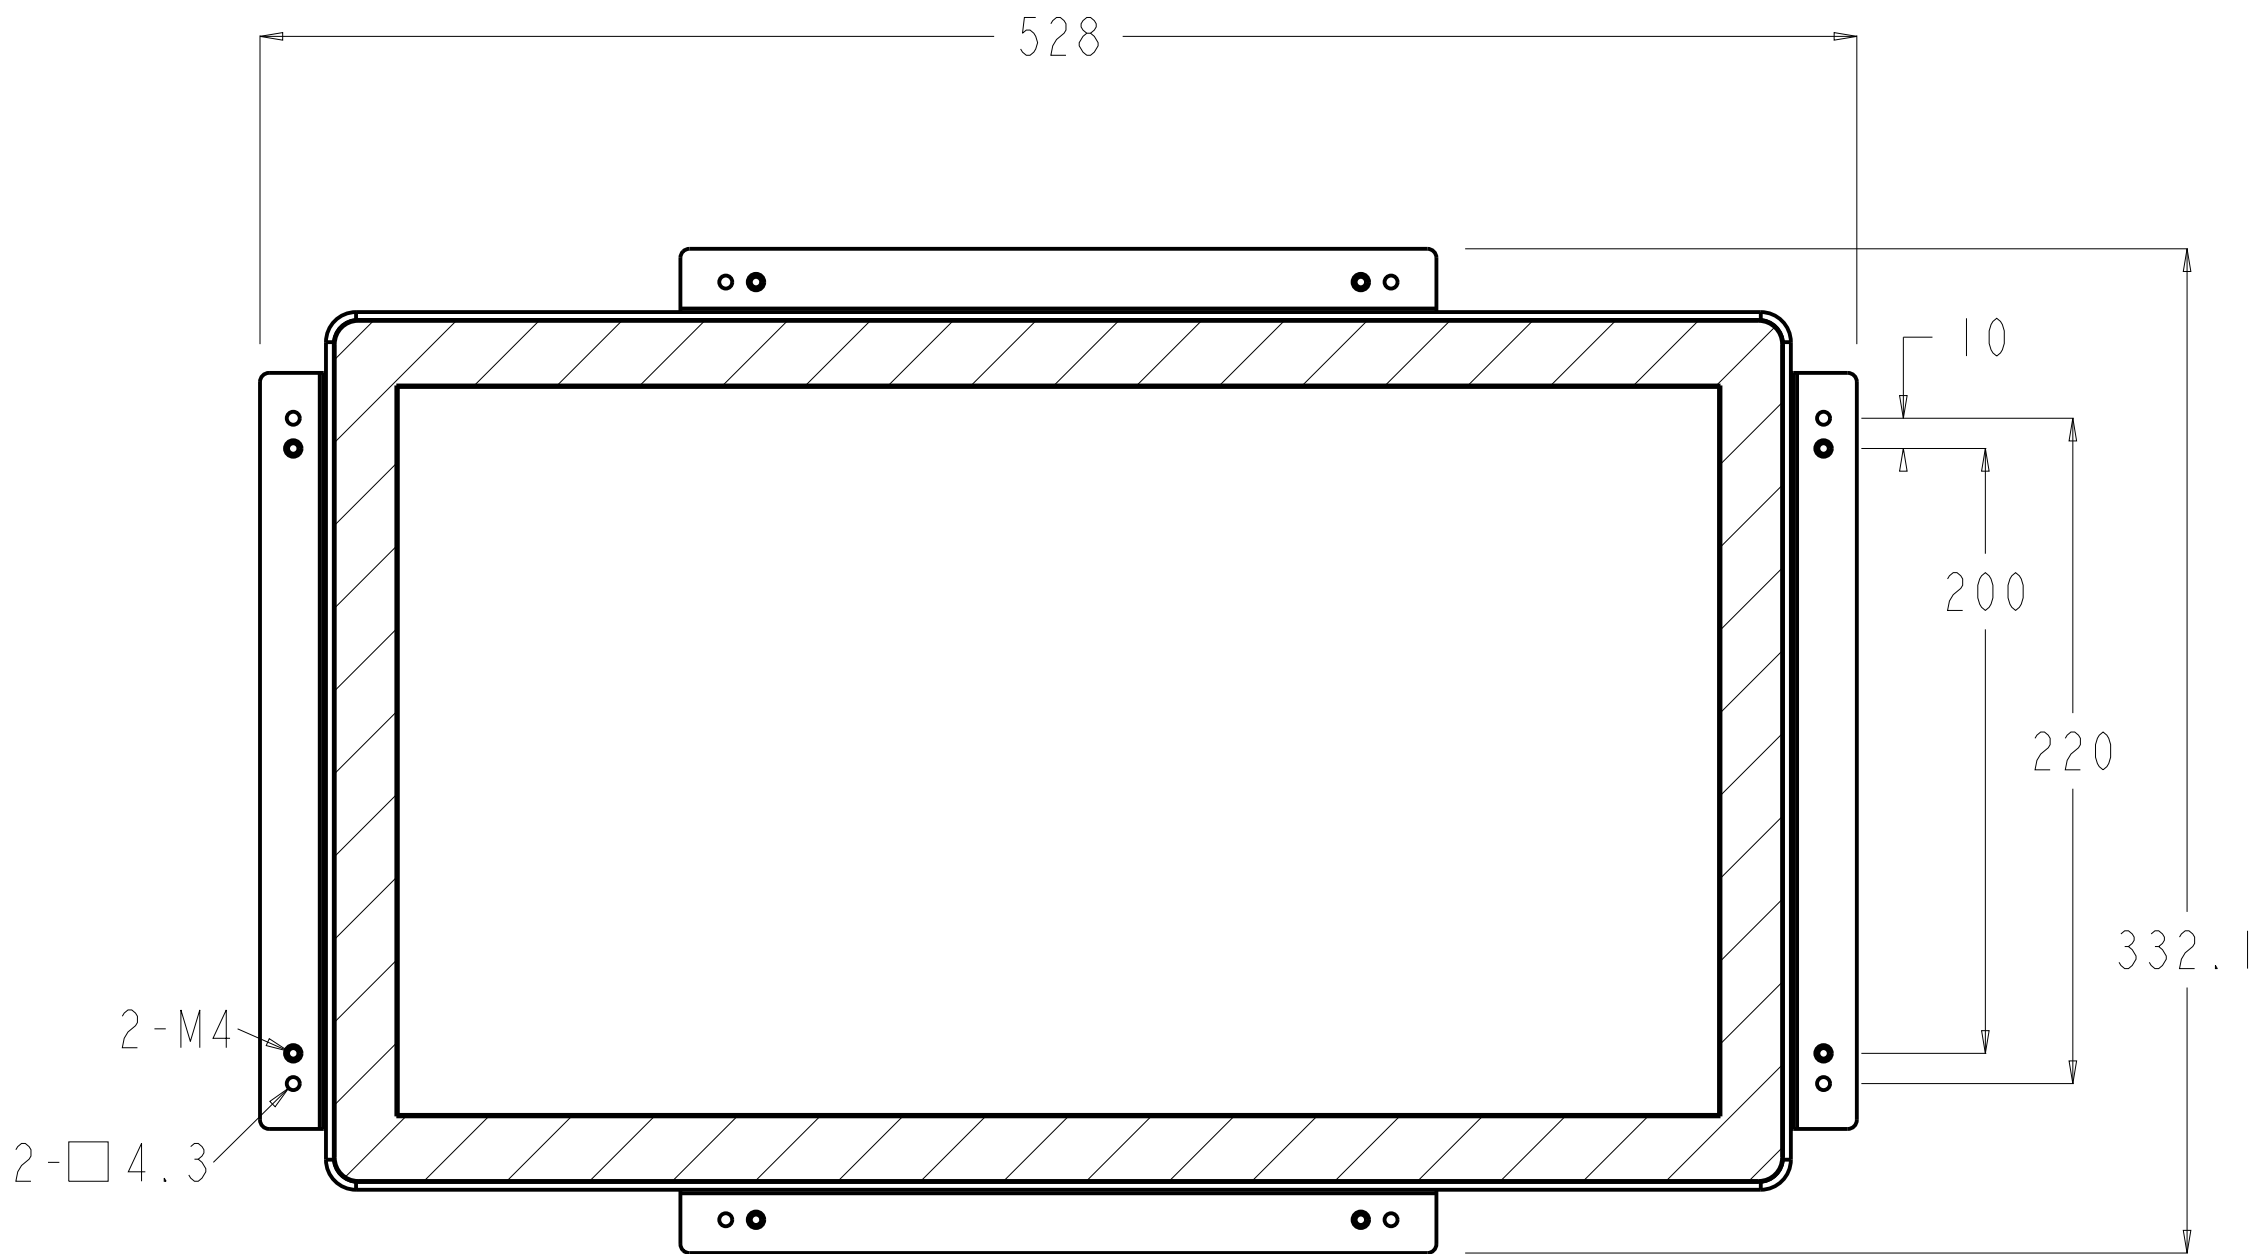

ADJUSTMENT RANGE = 5.1 TO 17.6

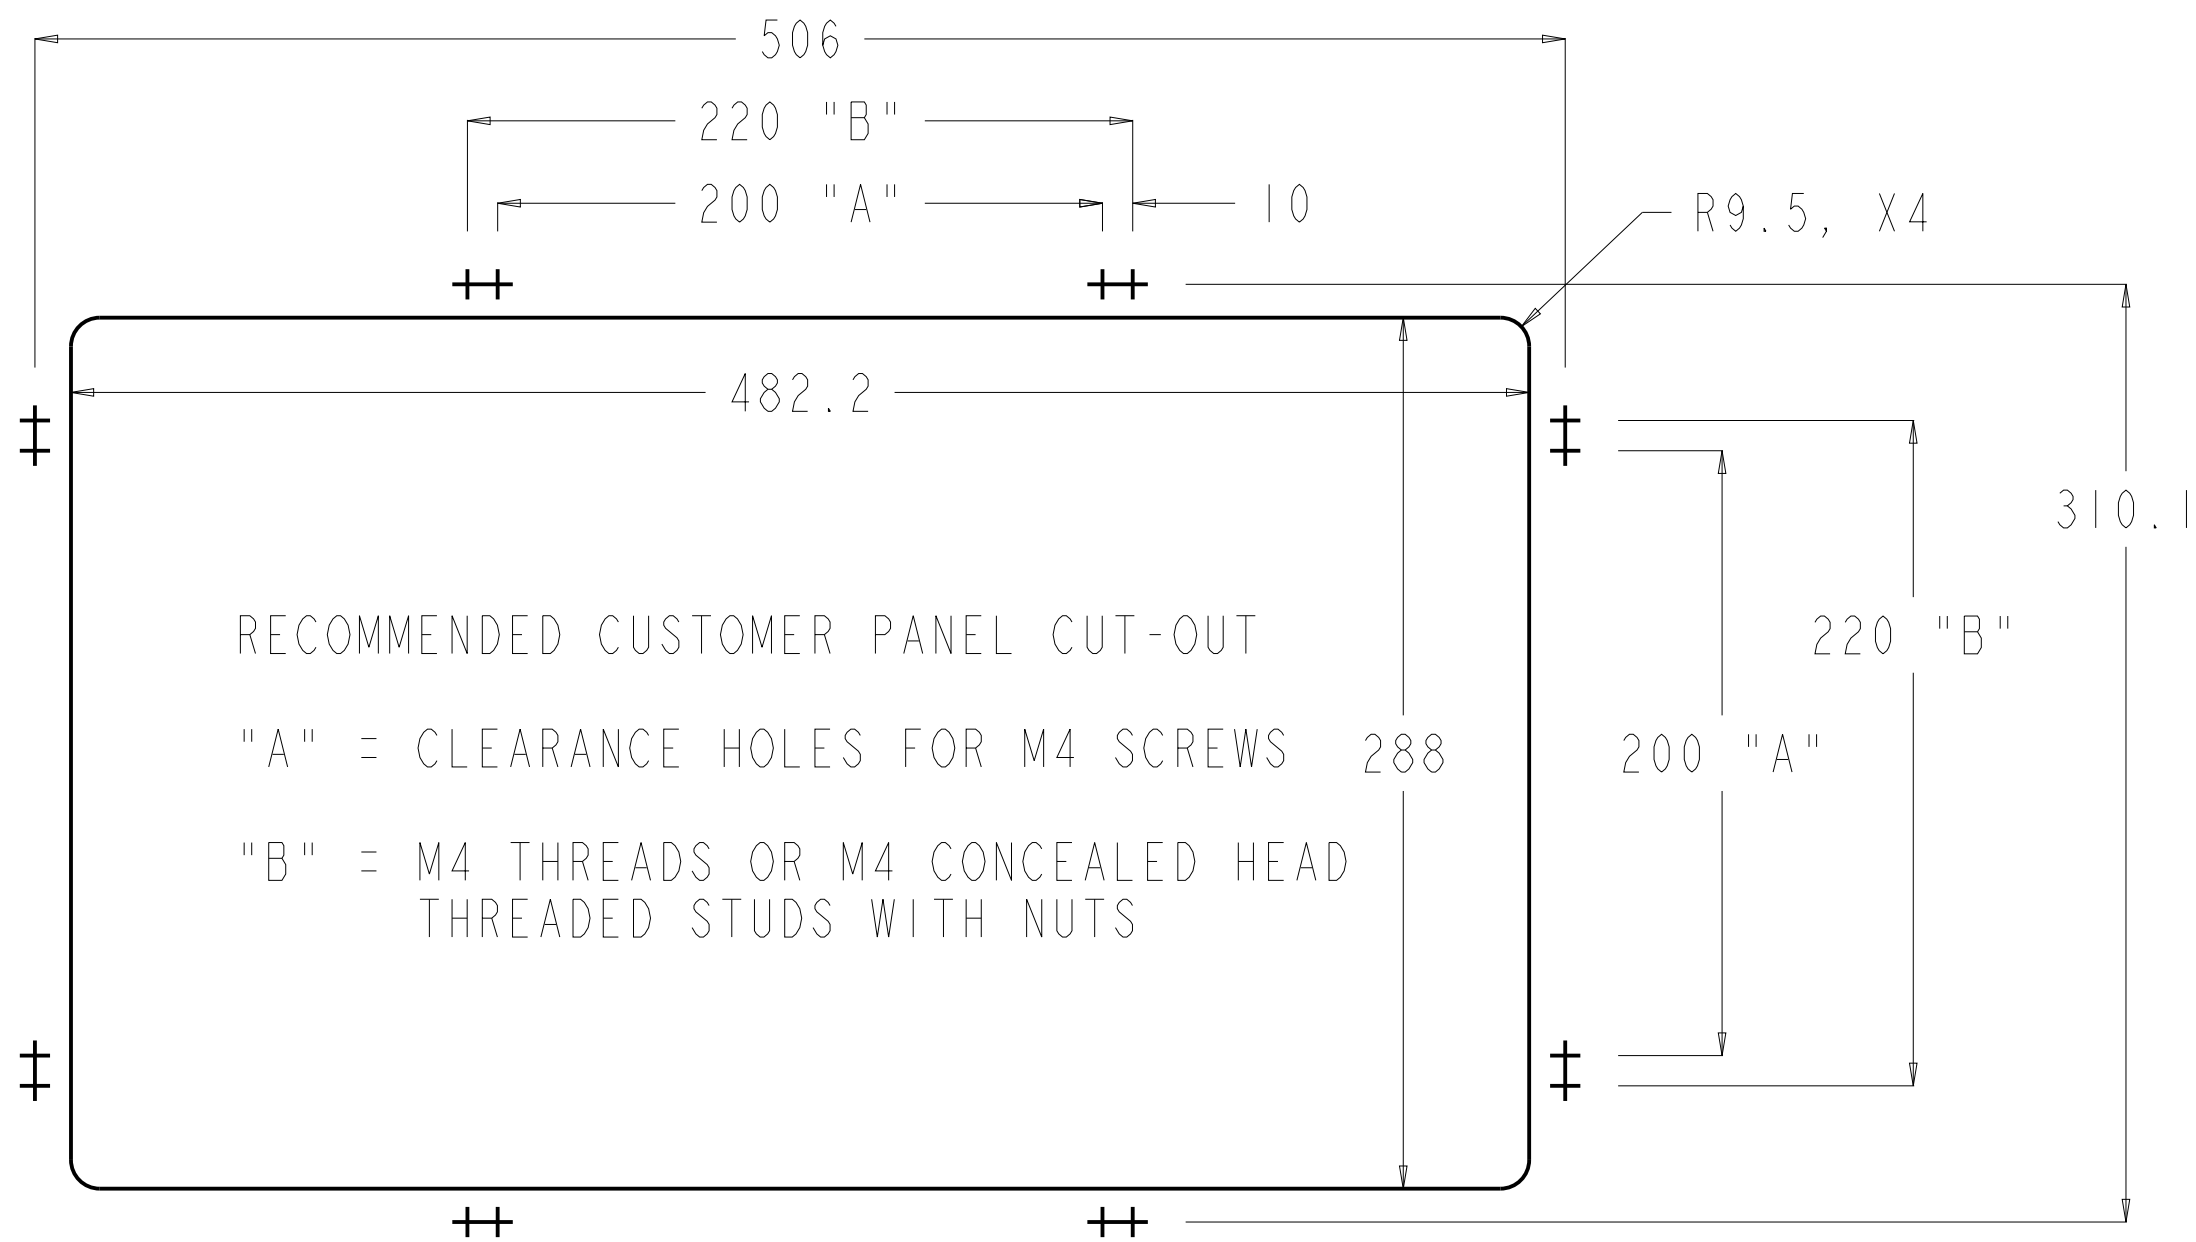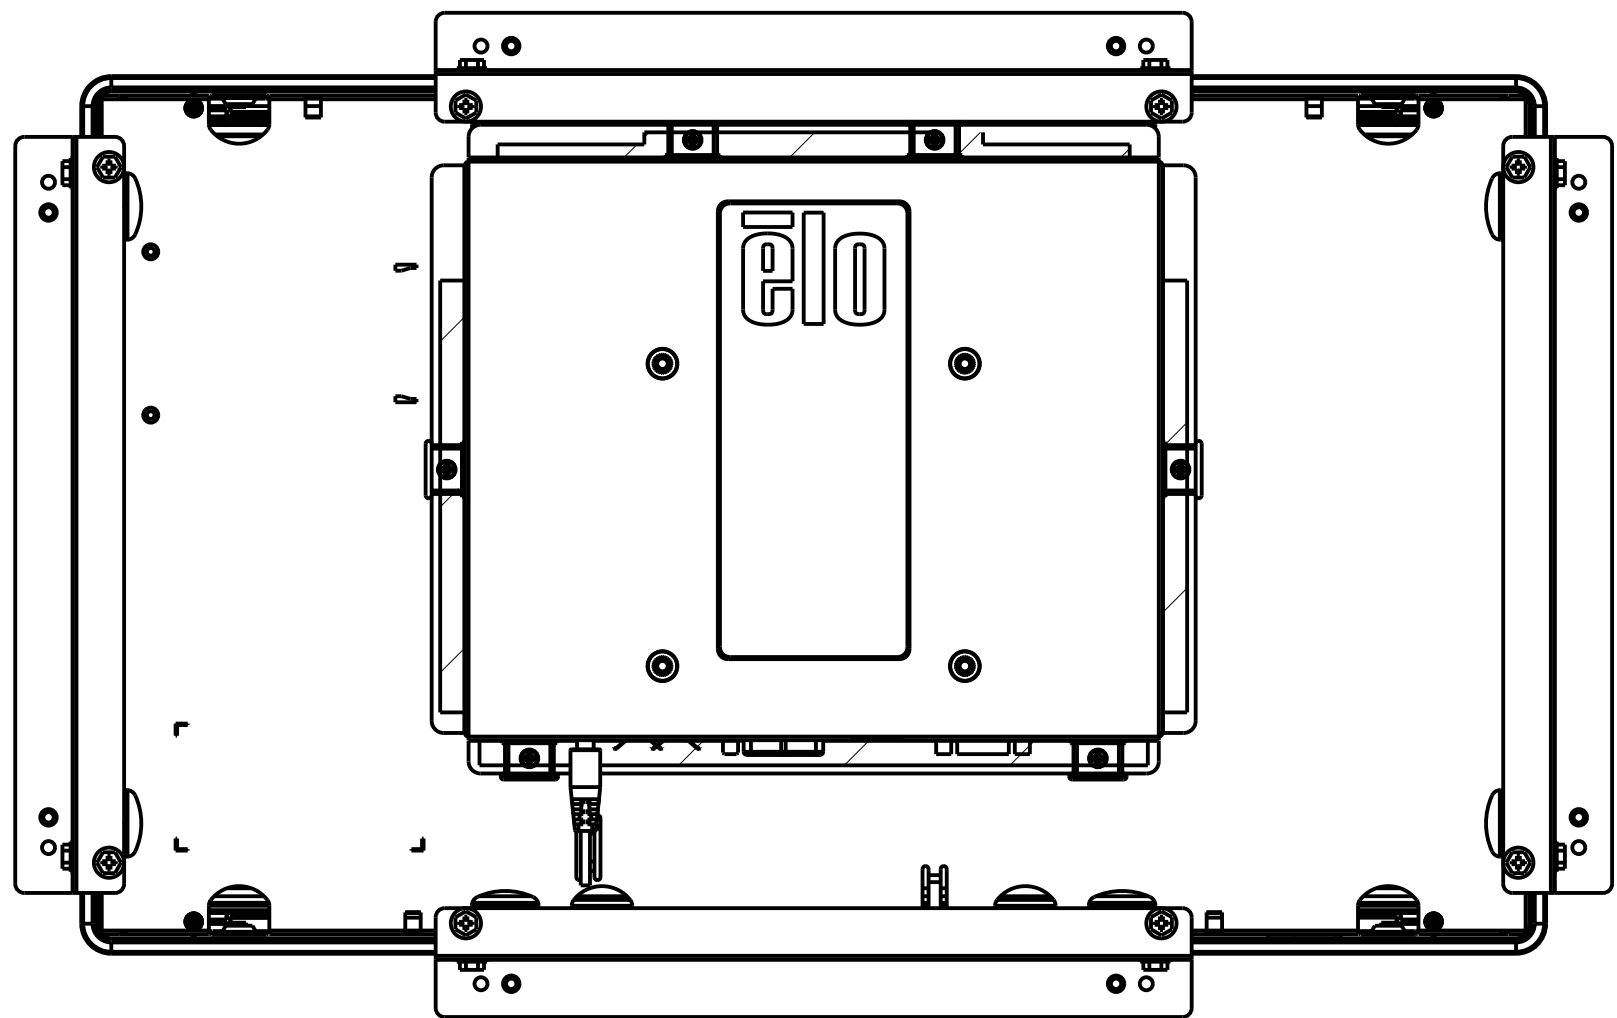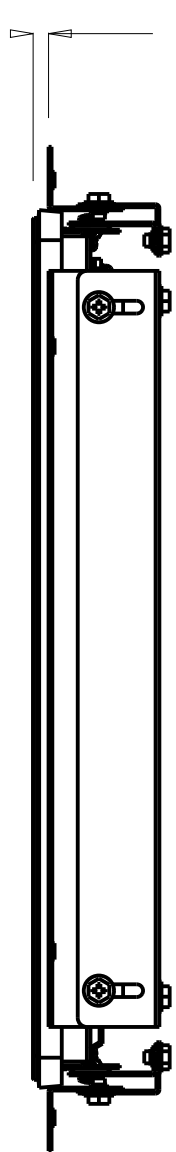



TOUCHMONITOR

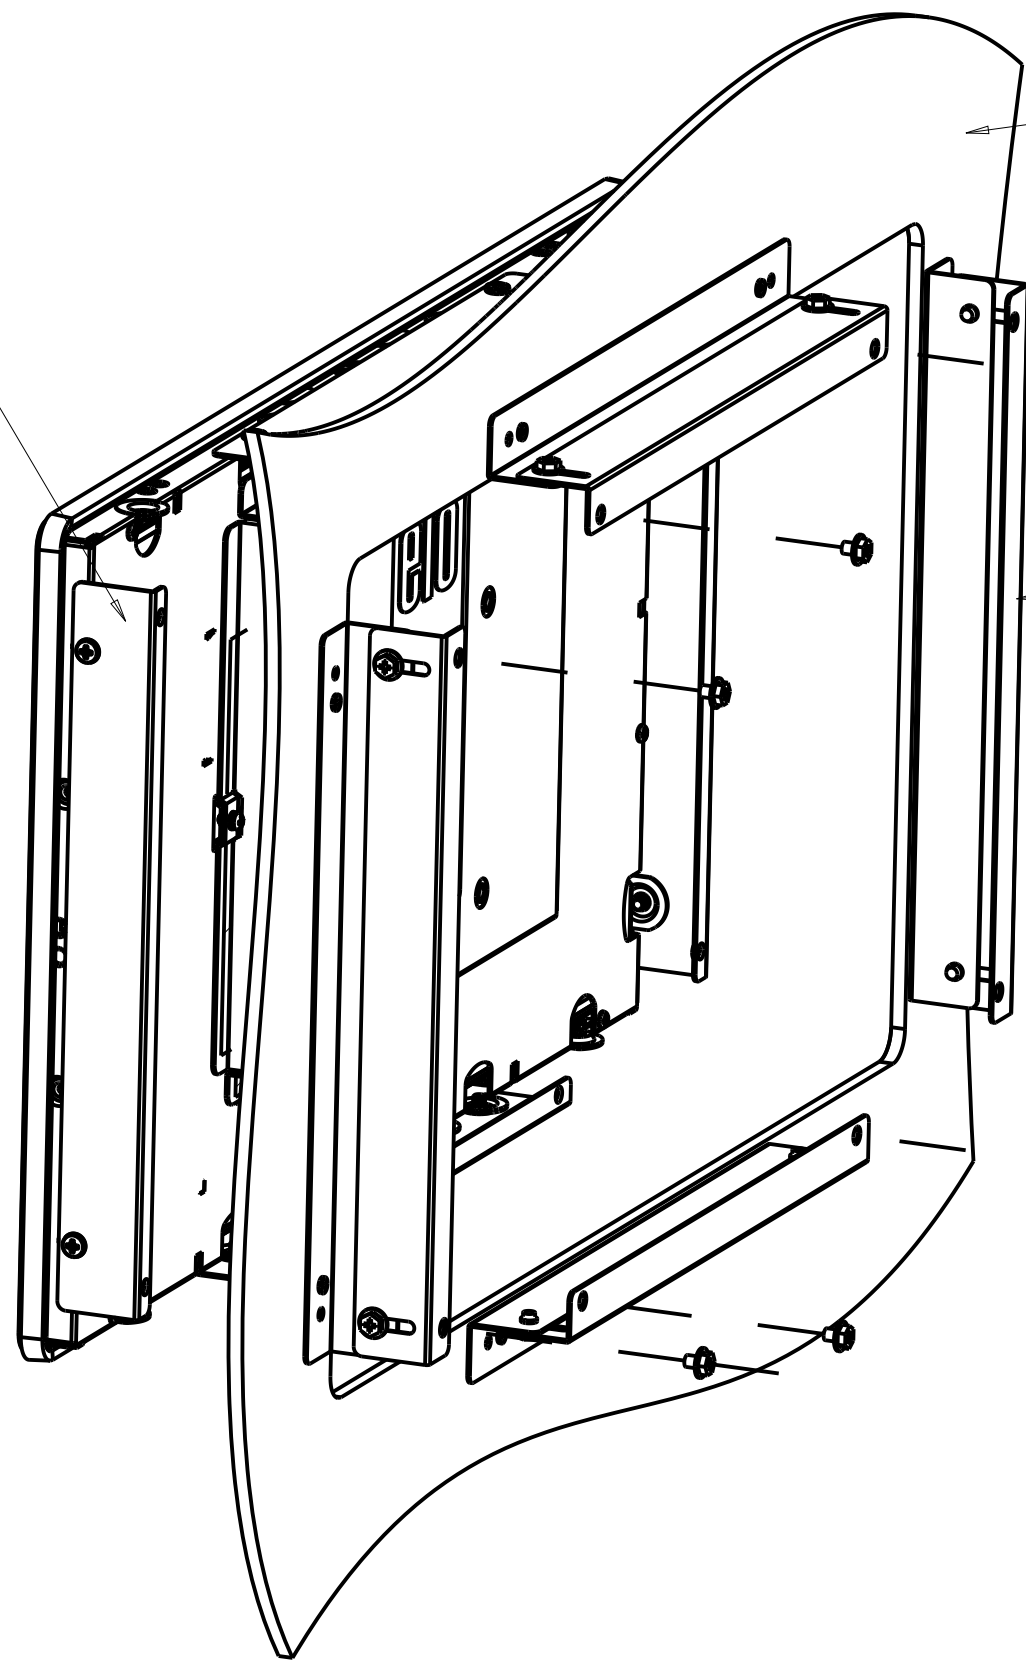

CUSTOMER PANEL (NOT INCLUDED)
お客様が準備される筐体のパネル
MIN THICKNESS = 5MM
MAX THICKNESS = 14MM

INSTALL ADJUSTING BRACKETS SO TOUCHMONITOR
WILL BE FLUSH WITH CUSTOMER PANEL

超音波表面弾性波方式モデルET2094L-8CWB-0-ST-NPB-G

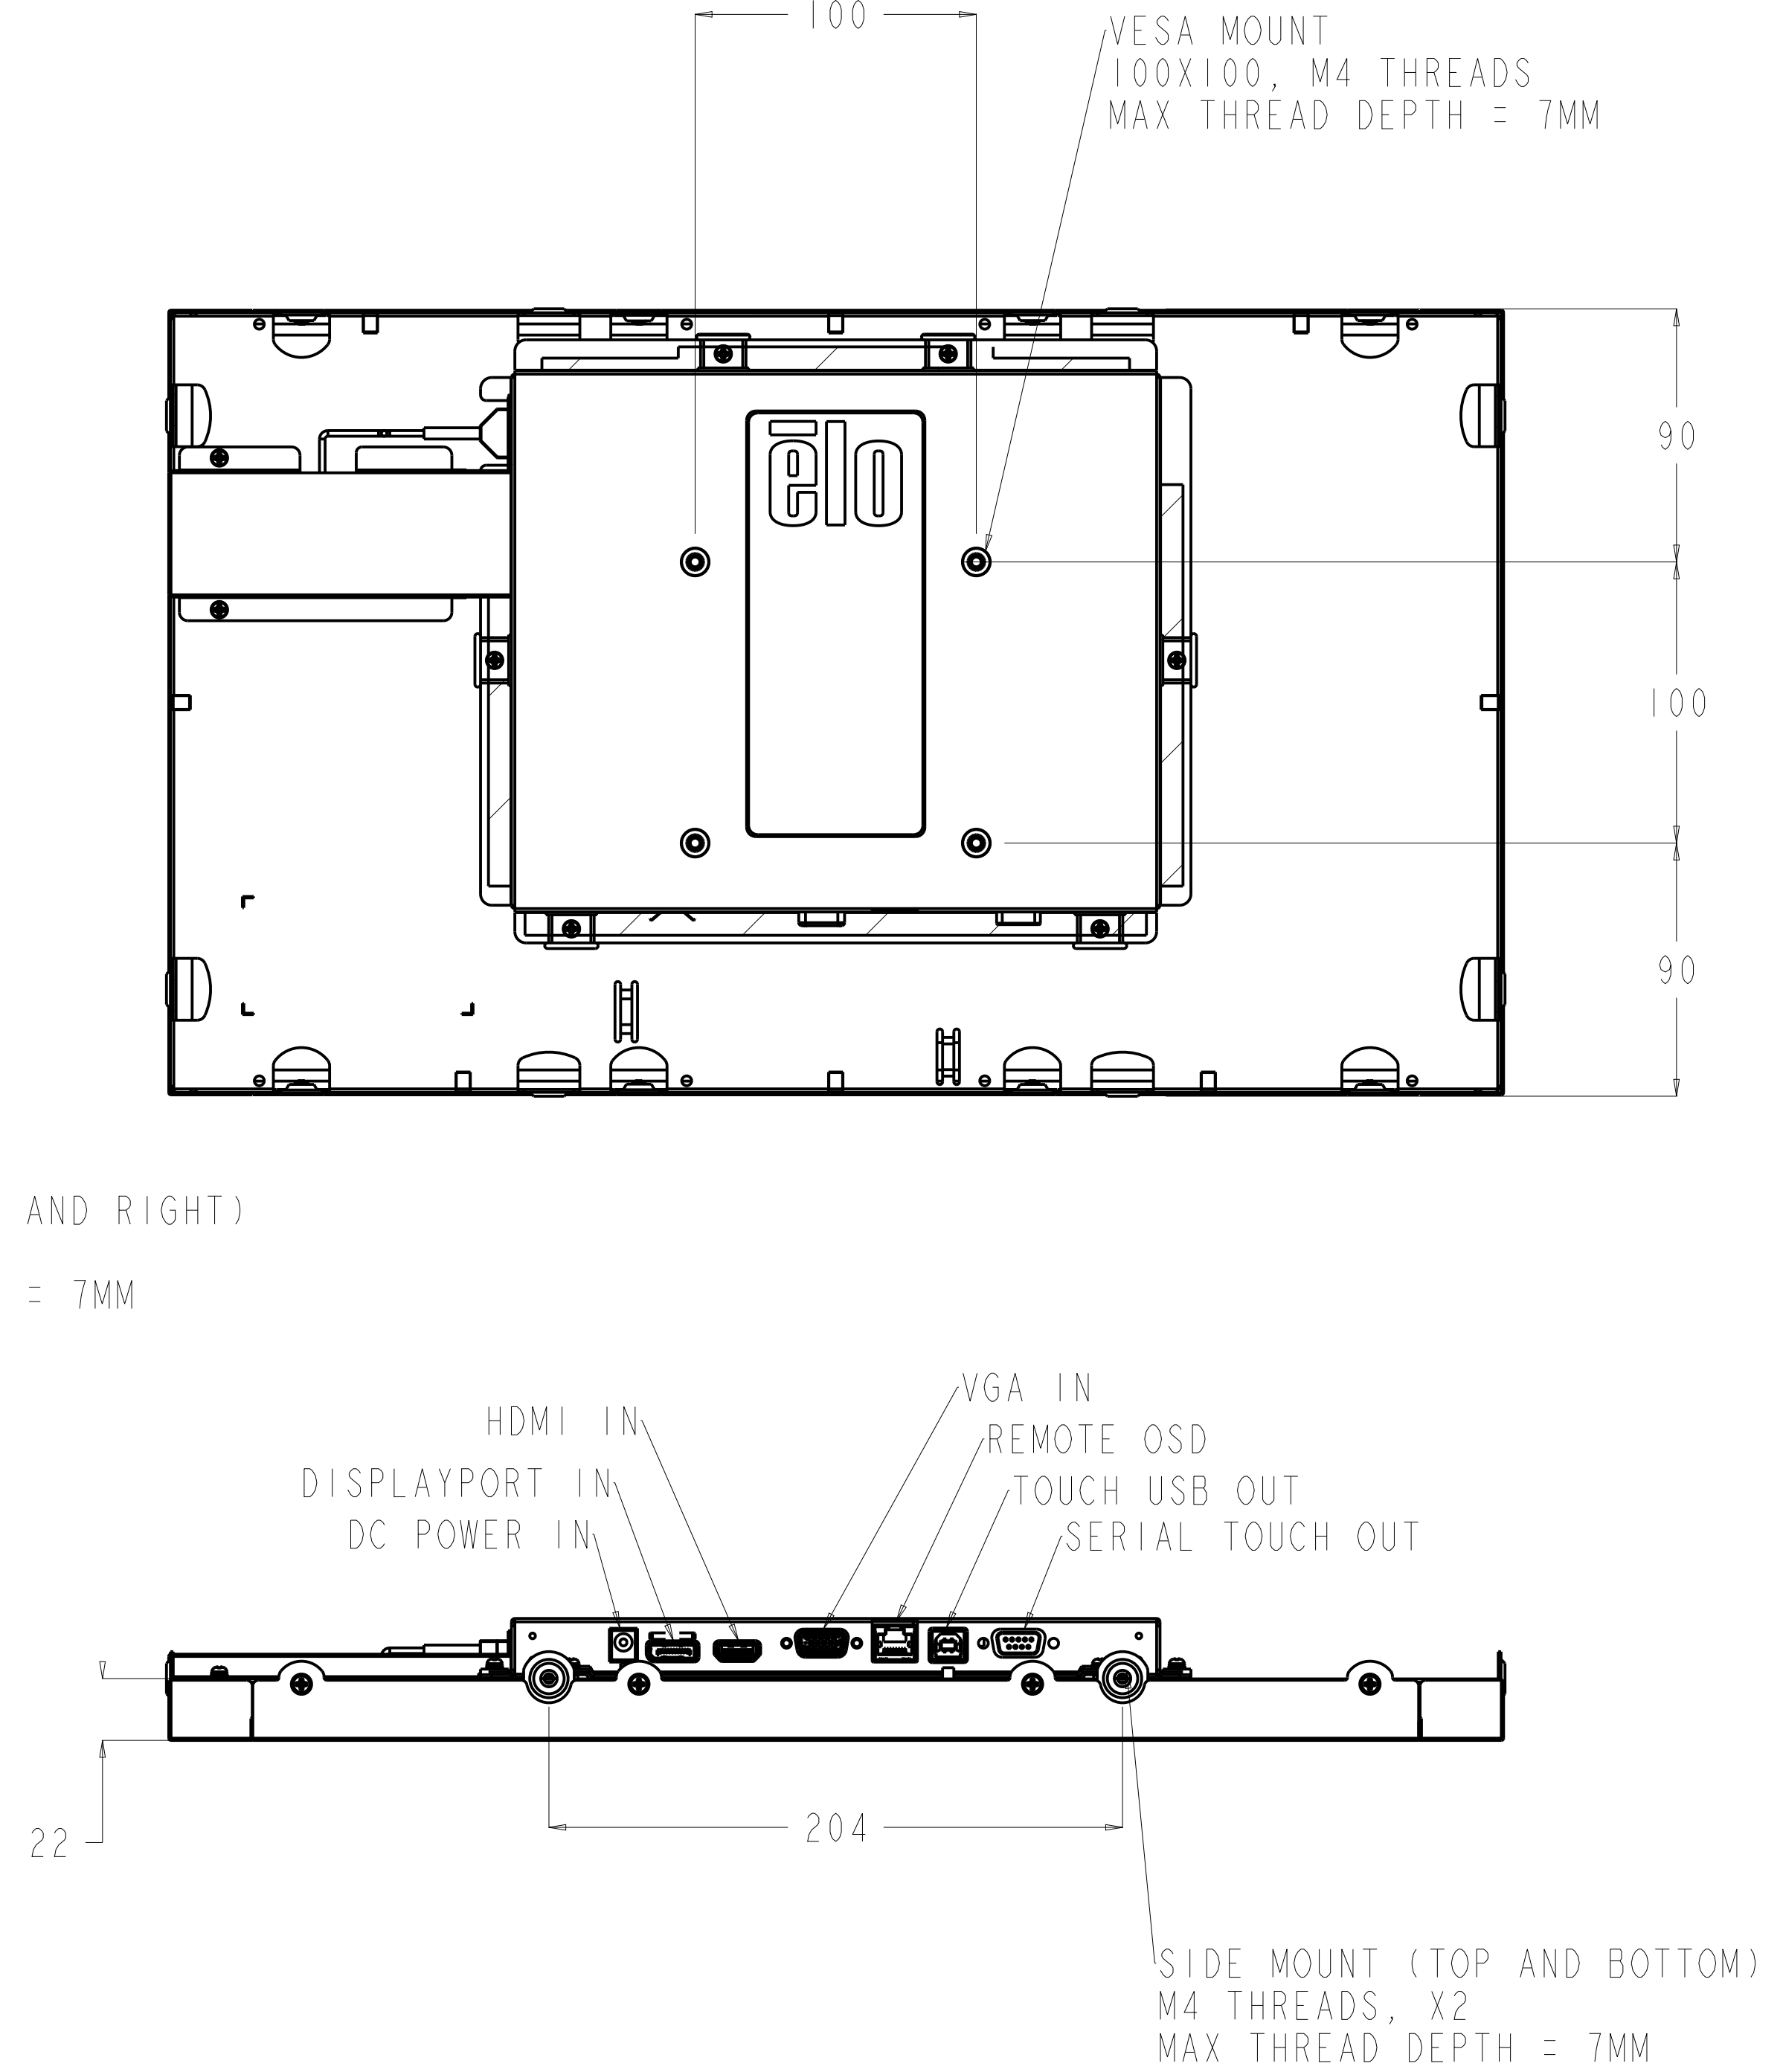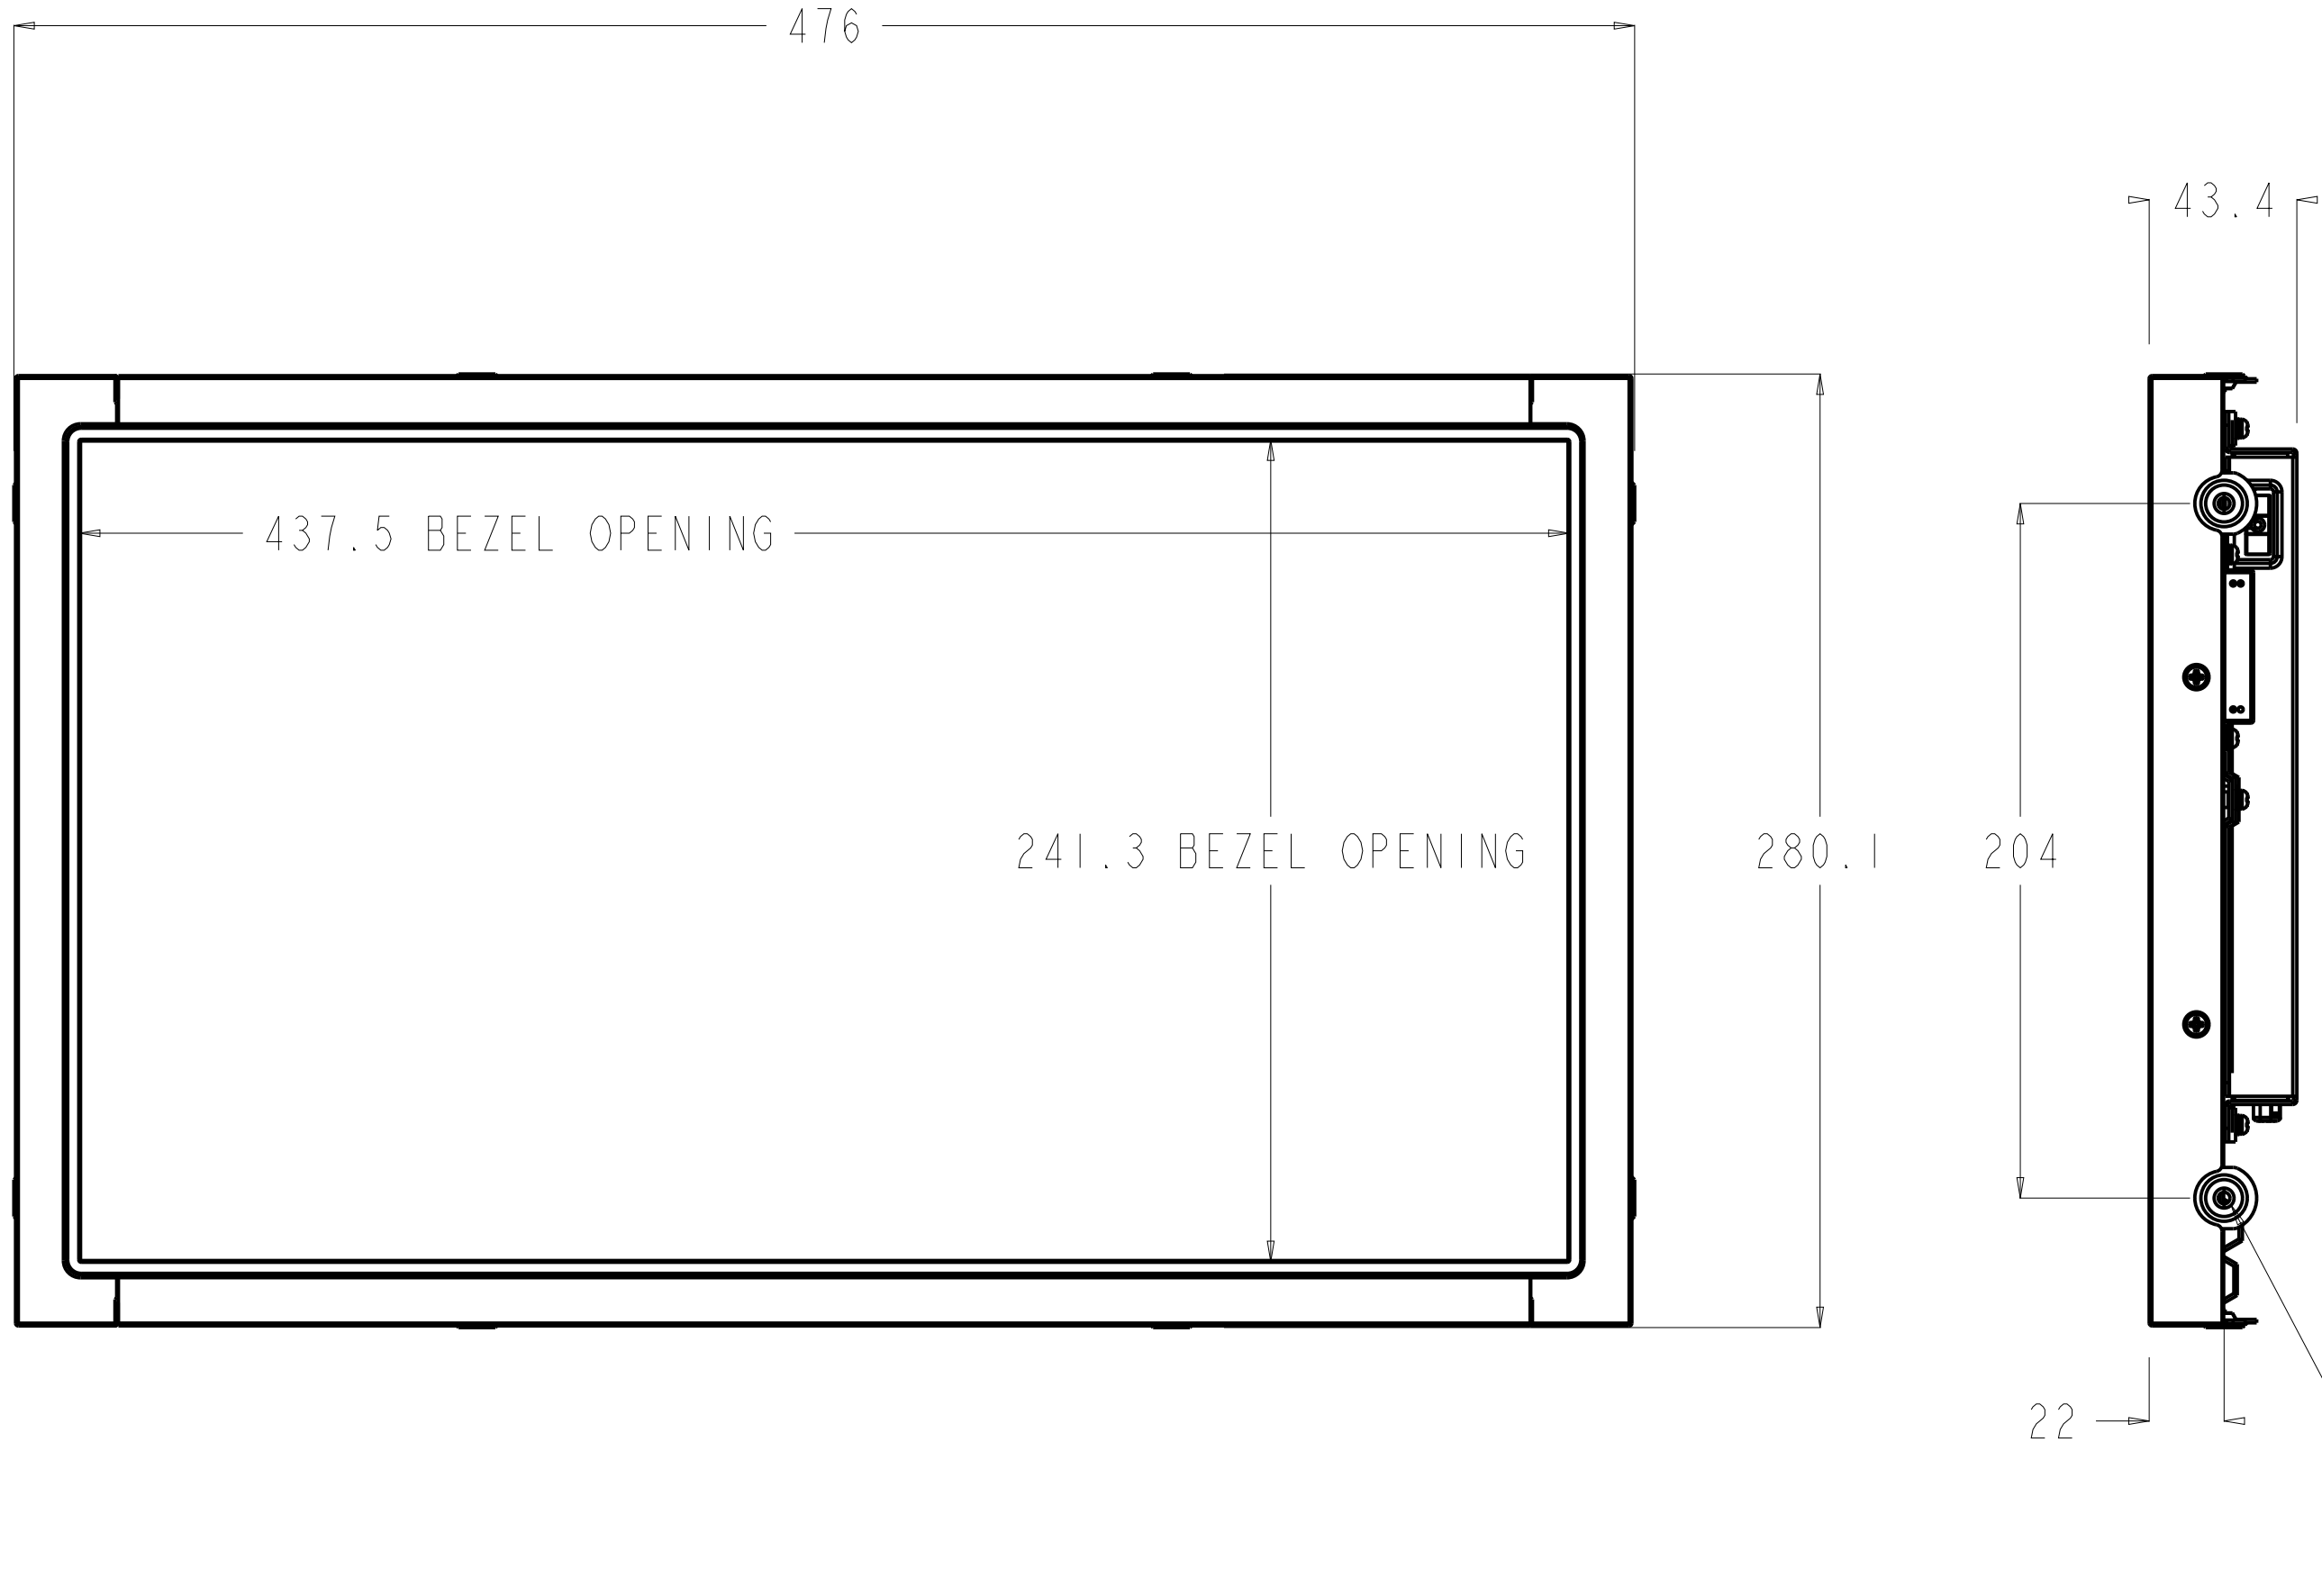

超音波表面弾性波方式モデルET2094L-8CWB-0-ST-NPB-G

WITH SIDE MOUNTING BRACKETS (4 INCLUDED)

