ELO COMMON PERIPHERAL MOUNT,X4
(UNDER COVER)

SPEAKER X2

POE PERIPHERAL DOCKING BAY
(UNDER COVER)

VESA MOUNT
M4 THREAD,X8
MAX THREAD DEPTH=5MM

75

252.9

22.1

16

8

17.4

218.08
(VIEW AREA)

136.88
(VIEW AREA)

169

75

16

R12.2X4

ELO LOGO

POWER BUTTON
HOME BUTTON

GPIO

KENSINGTON LOCK SLOT

OPTIONAL SECURITY
SCREW LOCATION, X2
M3X6 SCREW X2 INCLUDED

CONNECTIONS(UNDER COVER)

CONNECTIONS(UNDER COVER)

CONNECTIONS(UNDER COVER)

MIC X 2

DC

ETHERNET

USB 3.0

USB TYPE C

DC IN   LAN

SD CARD

USB   USB-C

HOOK, X2 USED TO SECURE CABLES
WITH TIE-WRAPS INCLUDED

MICRO SD

elo

MS603522
DATE: 02/17/26
REV: A2

ELO PERIPHERAL MOUNTING INTERFACE(1 PER SIDE)
(SEE WEBSITE FOR DIMENSIONAL DRAWINGS OF COMPATIBLE PERIPHERALS)

TOP LOCATION

M3 THREADS, X2(EACH SIDE)

SIDE LOCATION

MICRO-USB

SIDE LOCATION

102
TYPICA

BOTTOM LOCATION

elo

DIMENSIONS ARE IN MILLIMETERS

MS603522
DATE: 02/17/26
REV: A2
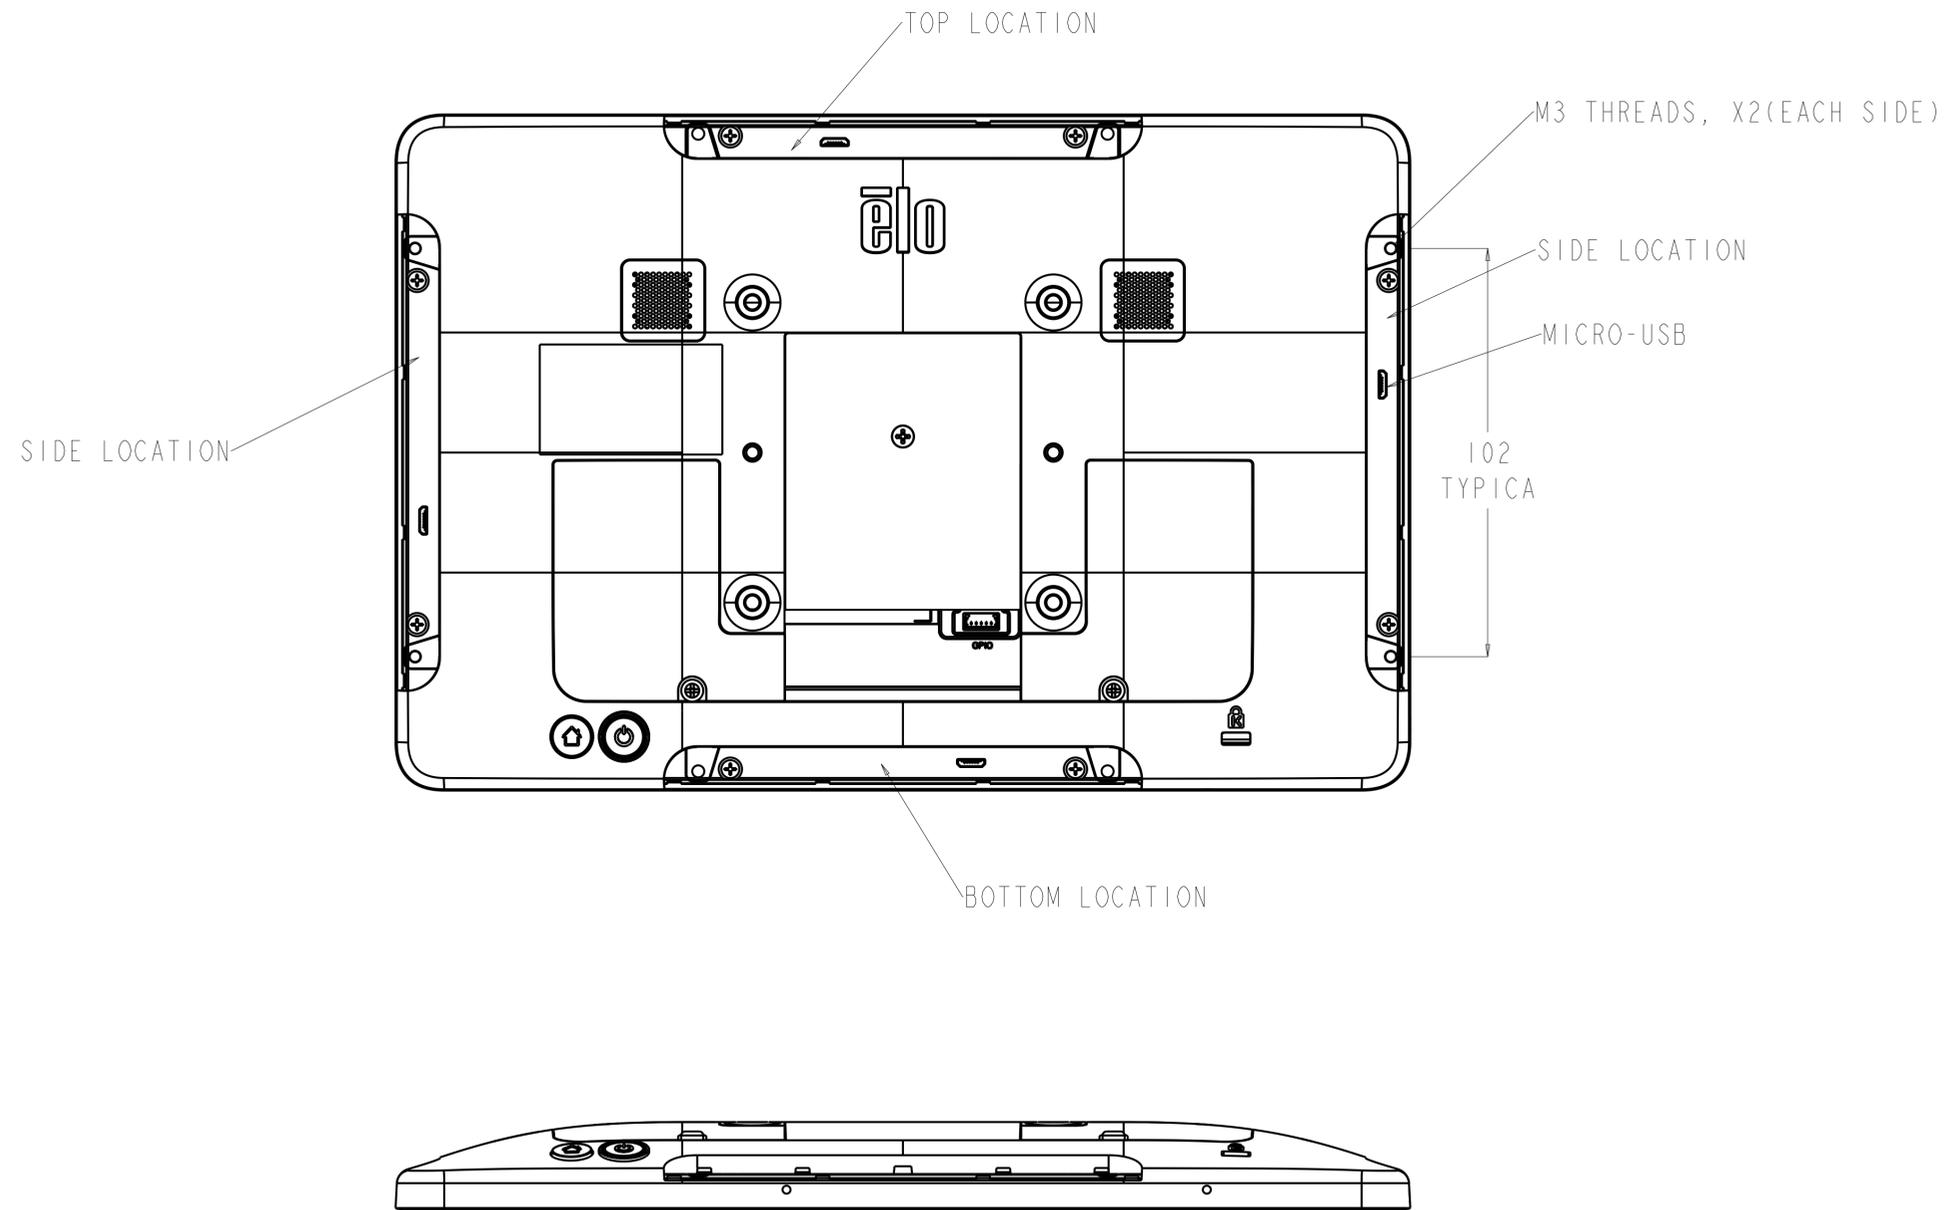
ER ETHERNET (POE) ADAPTER KIT
(OPTIONAL KIT, PURCHASED SEPARATELY)
POE COVER REMOVED AND POE PERIPHERAL INSTALLED

MOUNT

REQUIRES EXTENDED M4 SCREWS INCLUDED WITH POE KIT,
SCREWS PASS THROUGH POE MODULE/SPACER INTO ORIGINAL VESA MOUNT

27.1

SD CARD

GPIO
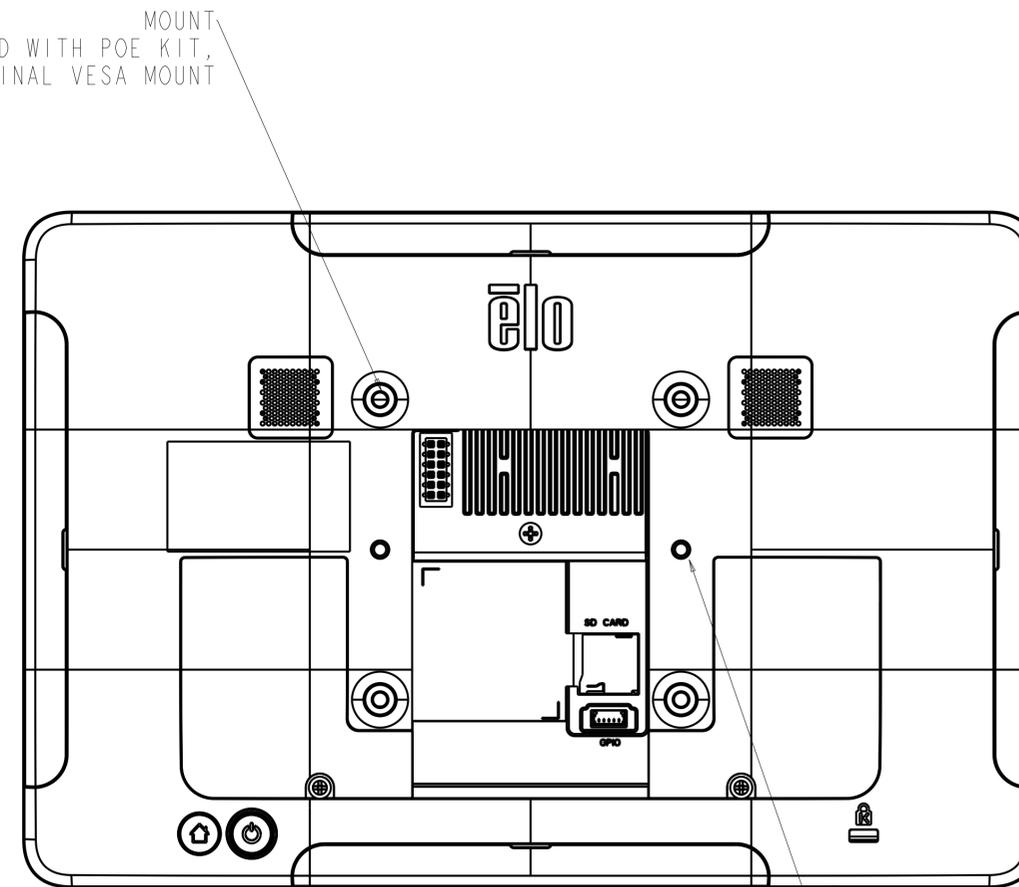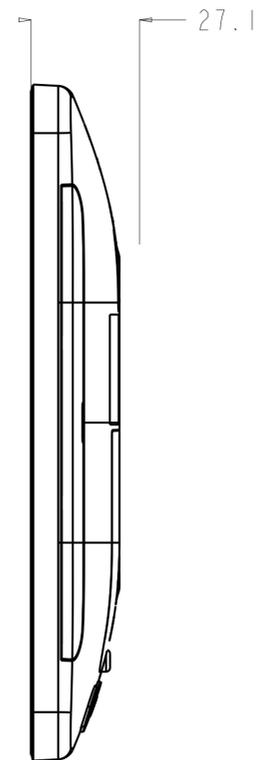
MOUNTING SCREW M3X8, 2 PCS
TO SECURE POE PERIPHERAL INTO POE DOCKING BAY

ēlo

MS603522
DATE: 02/17/26
REV: A2

オプションスタンド　E767159を使用した場合

128.8

128.8

252.9

226.3

5°

169

268.1

5°

elo

MS603522
DATE: 02/17/26
REV: A2