

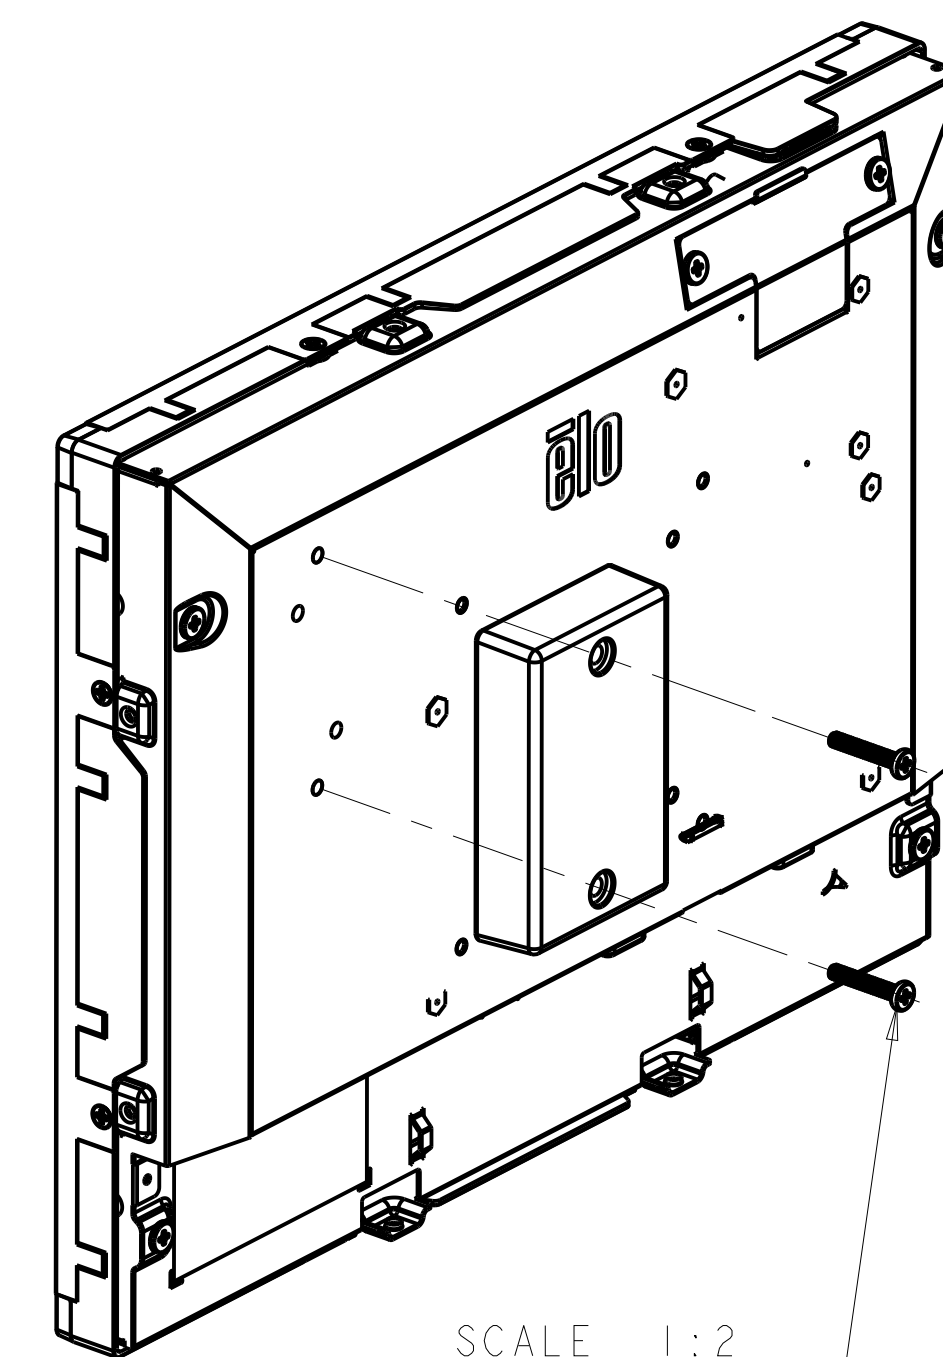
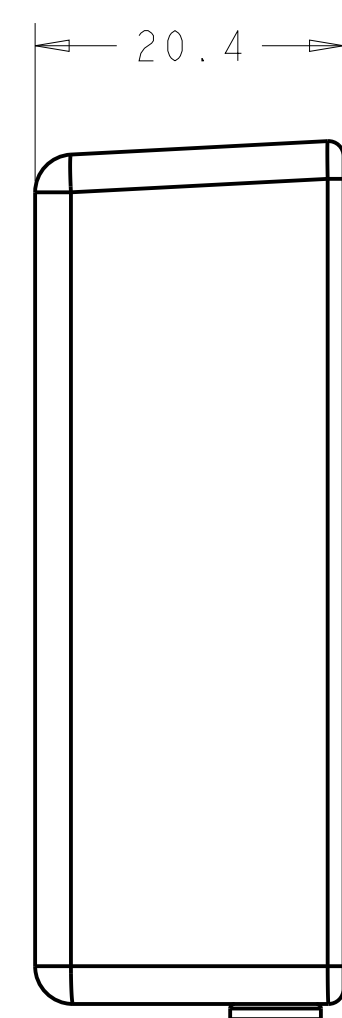


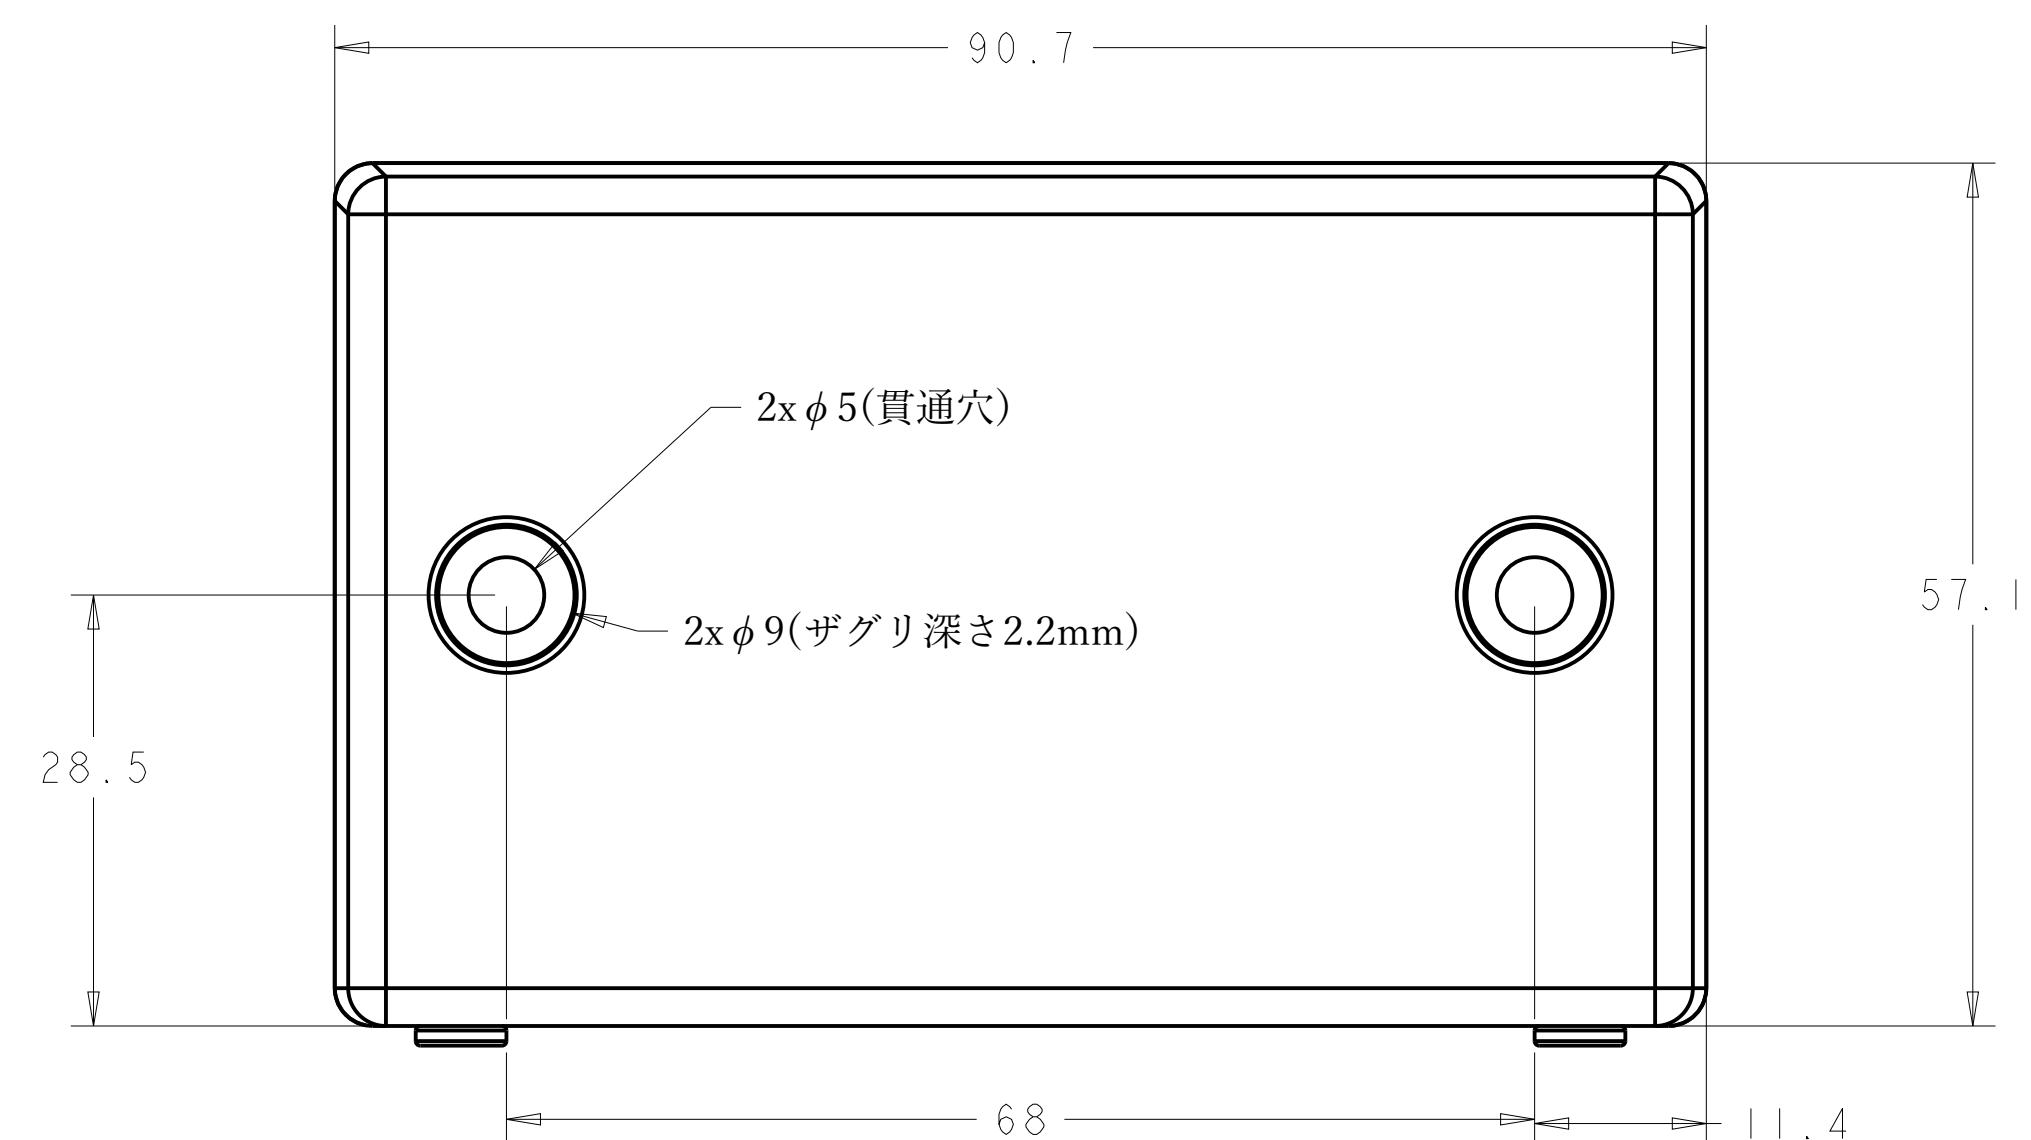


ATTACH DC/DC CONVERTER TO MONITOR ET1598L-
WITH 2XM4 SCREW

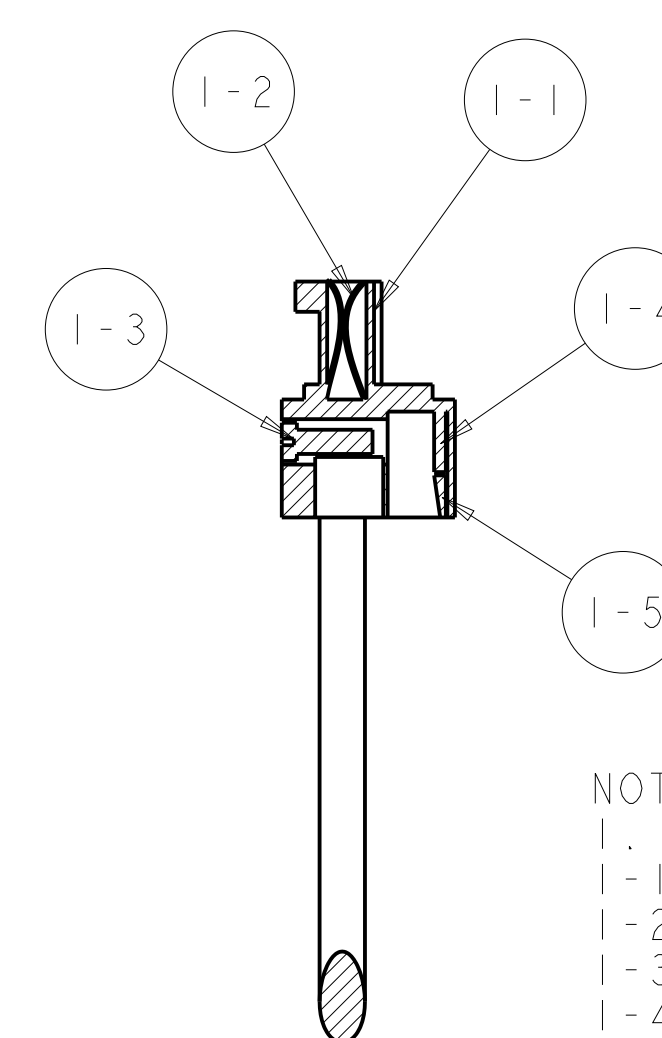

NOTES:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. CONTACT CURRENT RATING: 8A
 - 1-2. CONTACT VOLTAGE RATING: 300V AC
 - 1-3. CONTACT RESISTANCE: 20M Ω MAX.
 - 1-4. DIELECTRIC WITHSTANDING VOLTAGE: 1500V. AC. FOR 1 MINUTE
 - 1-5. INSULATION RESISTANCE: 500 M Ω MIN. AT 500V. DC
2. MECHANICAL PROPERTIES
 - 2-1. TEMPERATURE RANGE: -40°C TO +105°C
 - 2-2. TORSION: 0.2N.M/2.04 KGF.CM
 - 2-3. STRIP LENGTH: 6~7 MM

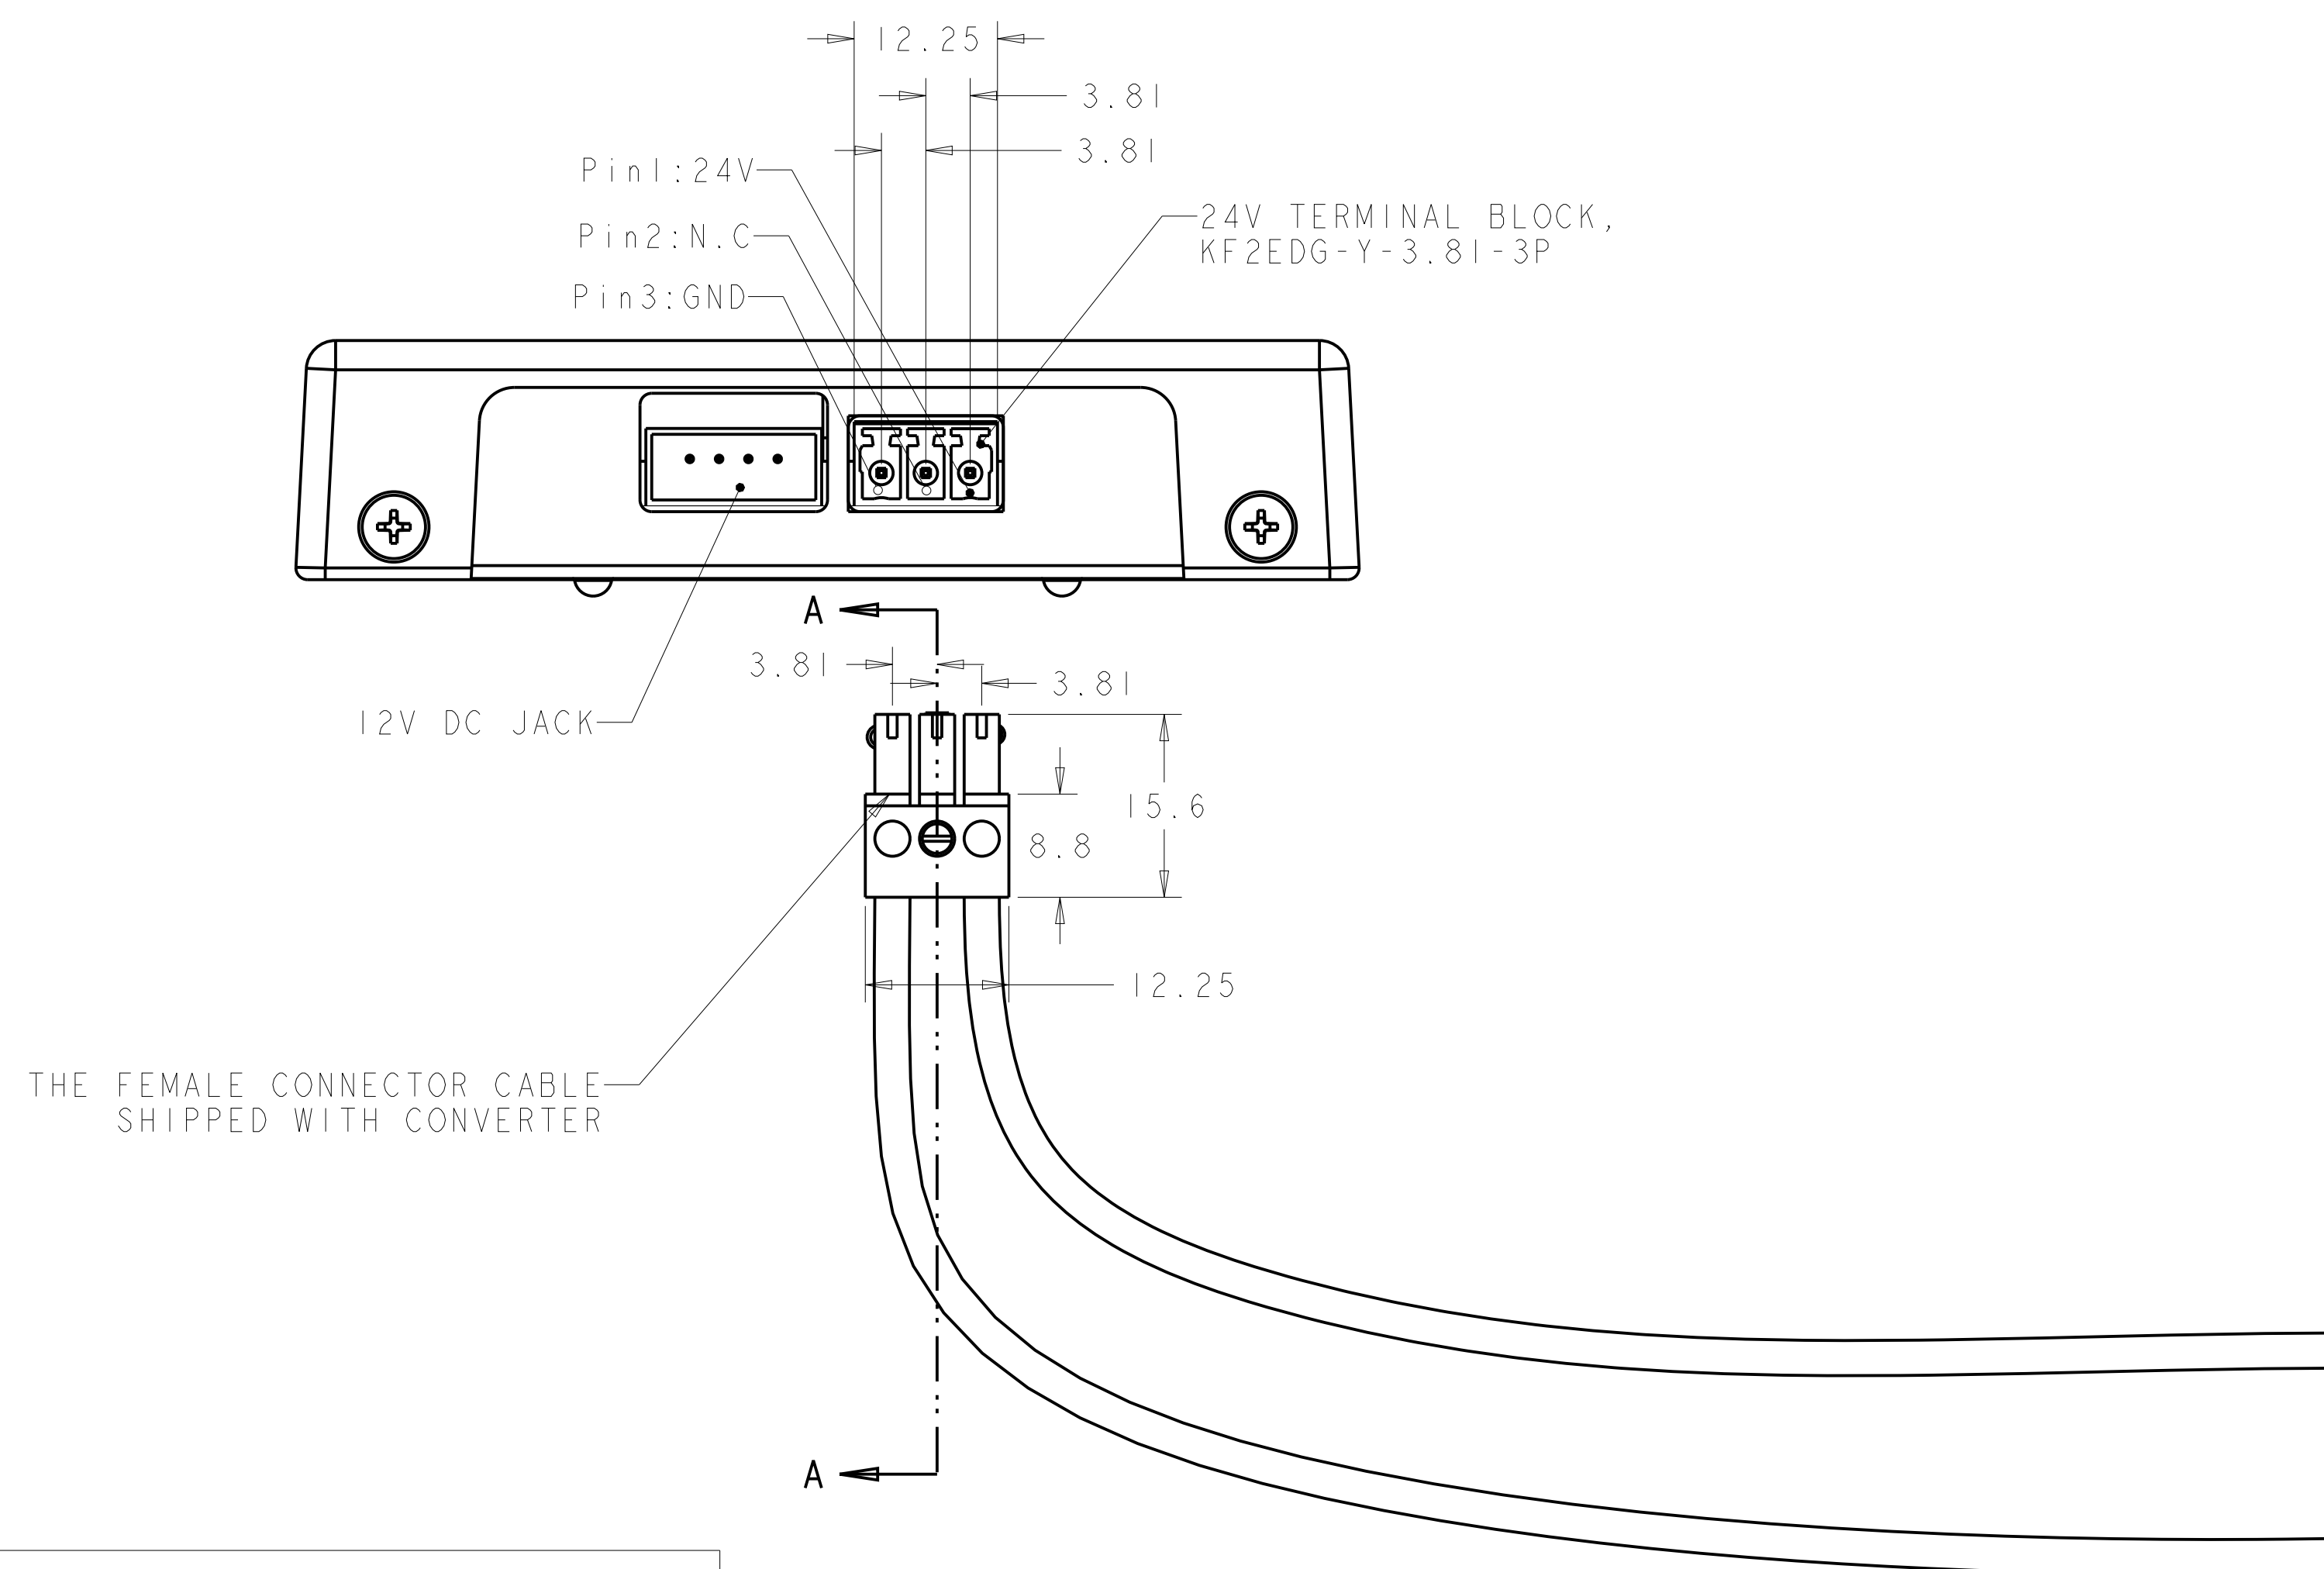

DIMENSIONS ARE IN MILLIMETERS

SECTION A - A

SHEET 1 OF 1

MS602455
DATE: 7/13/2026
REV: A2