
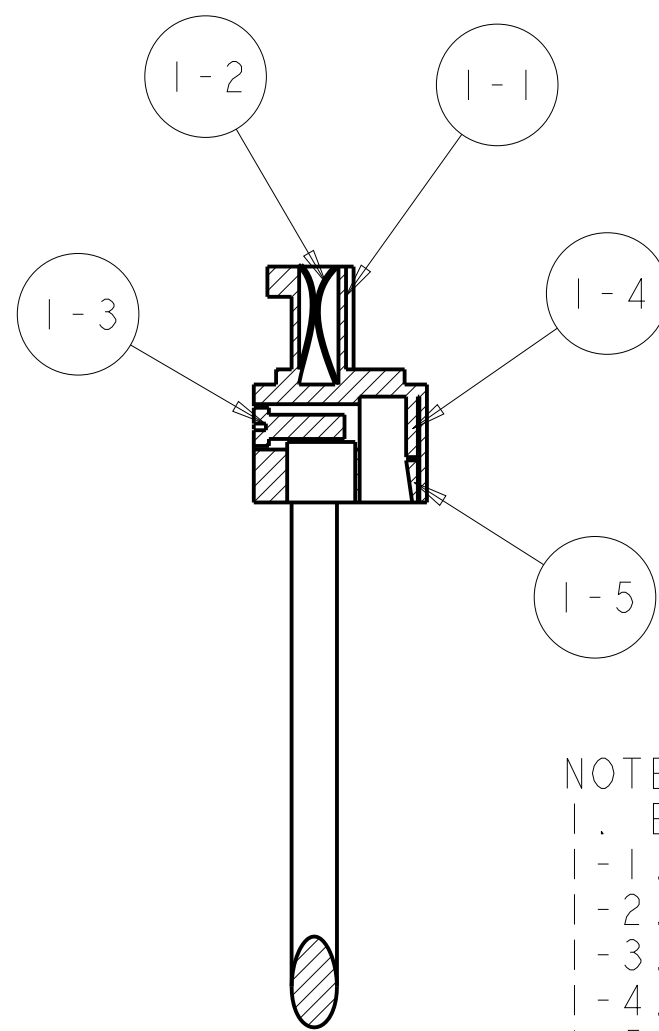
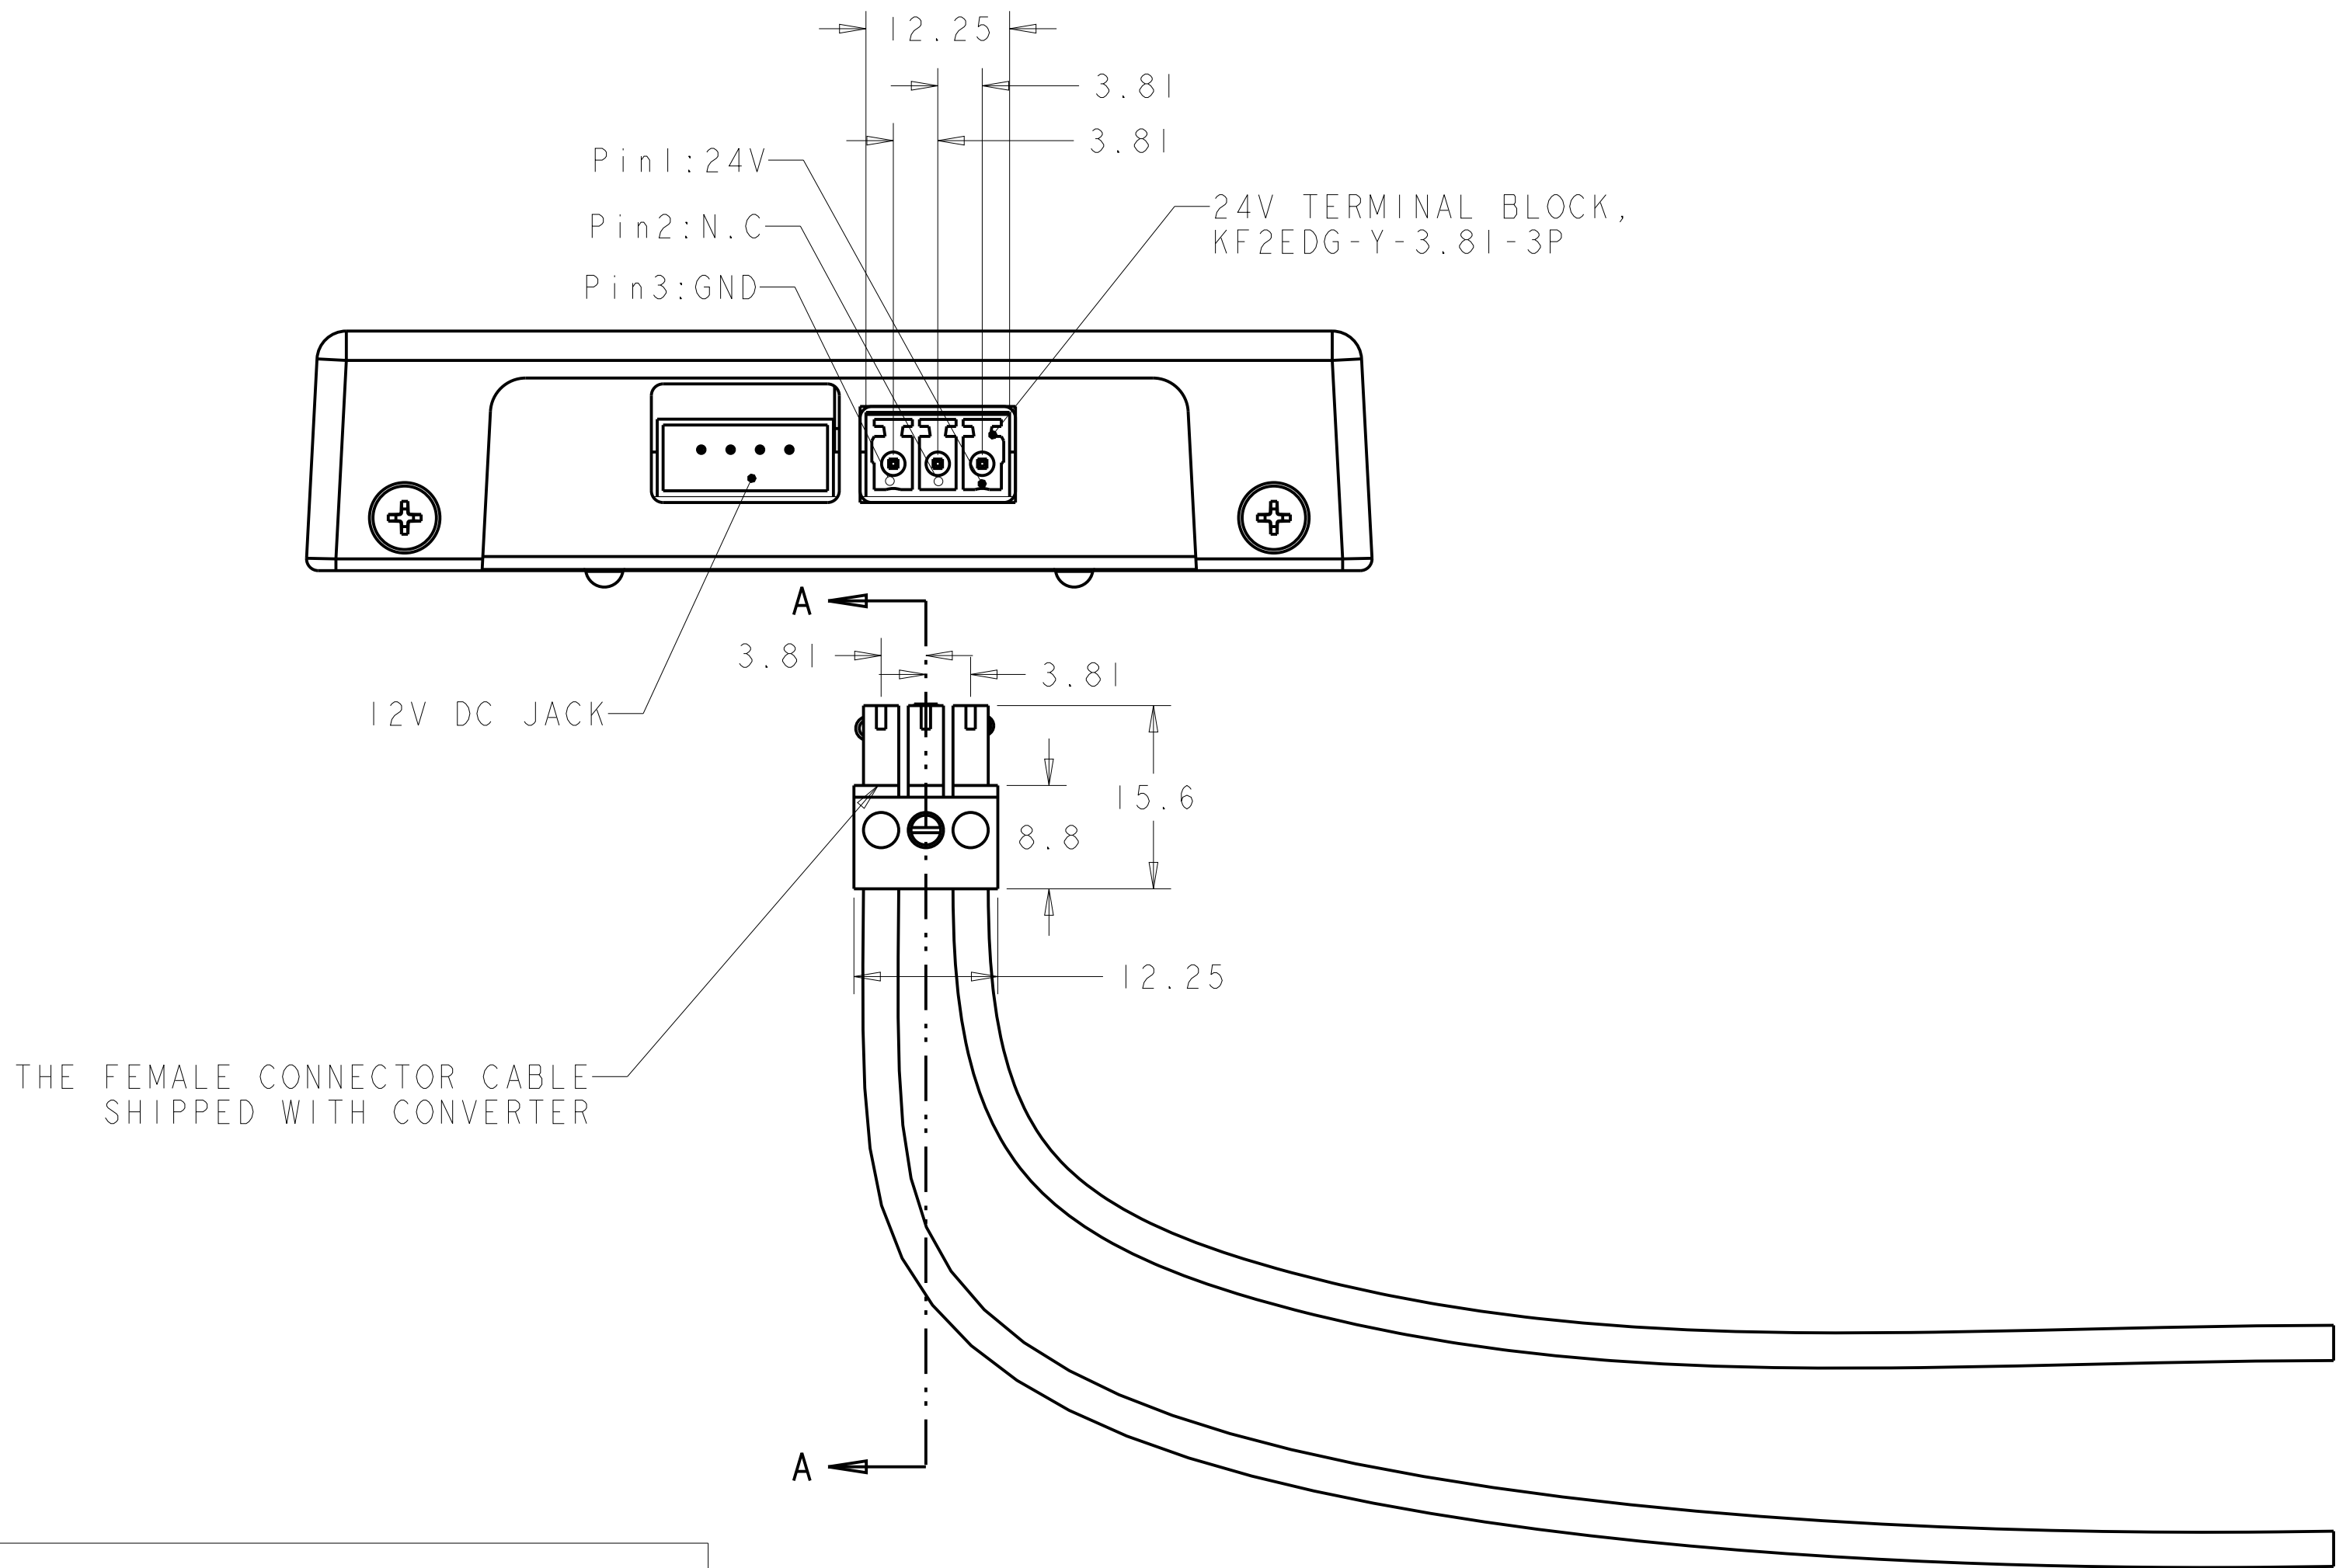
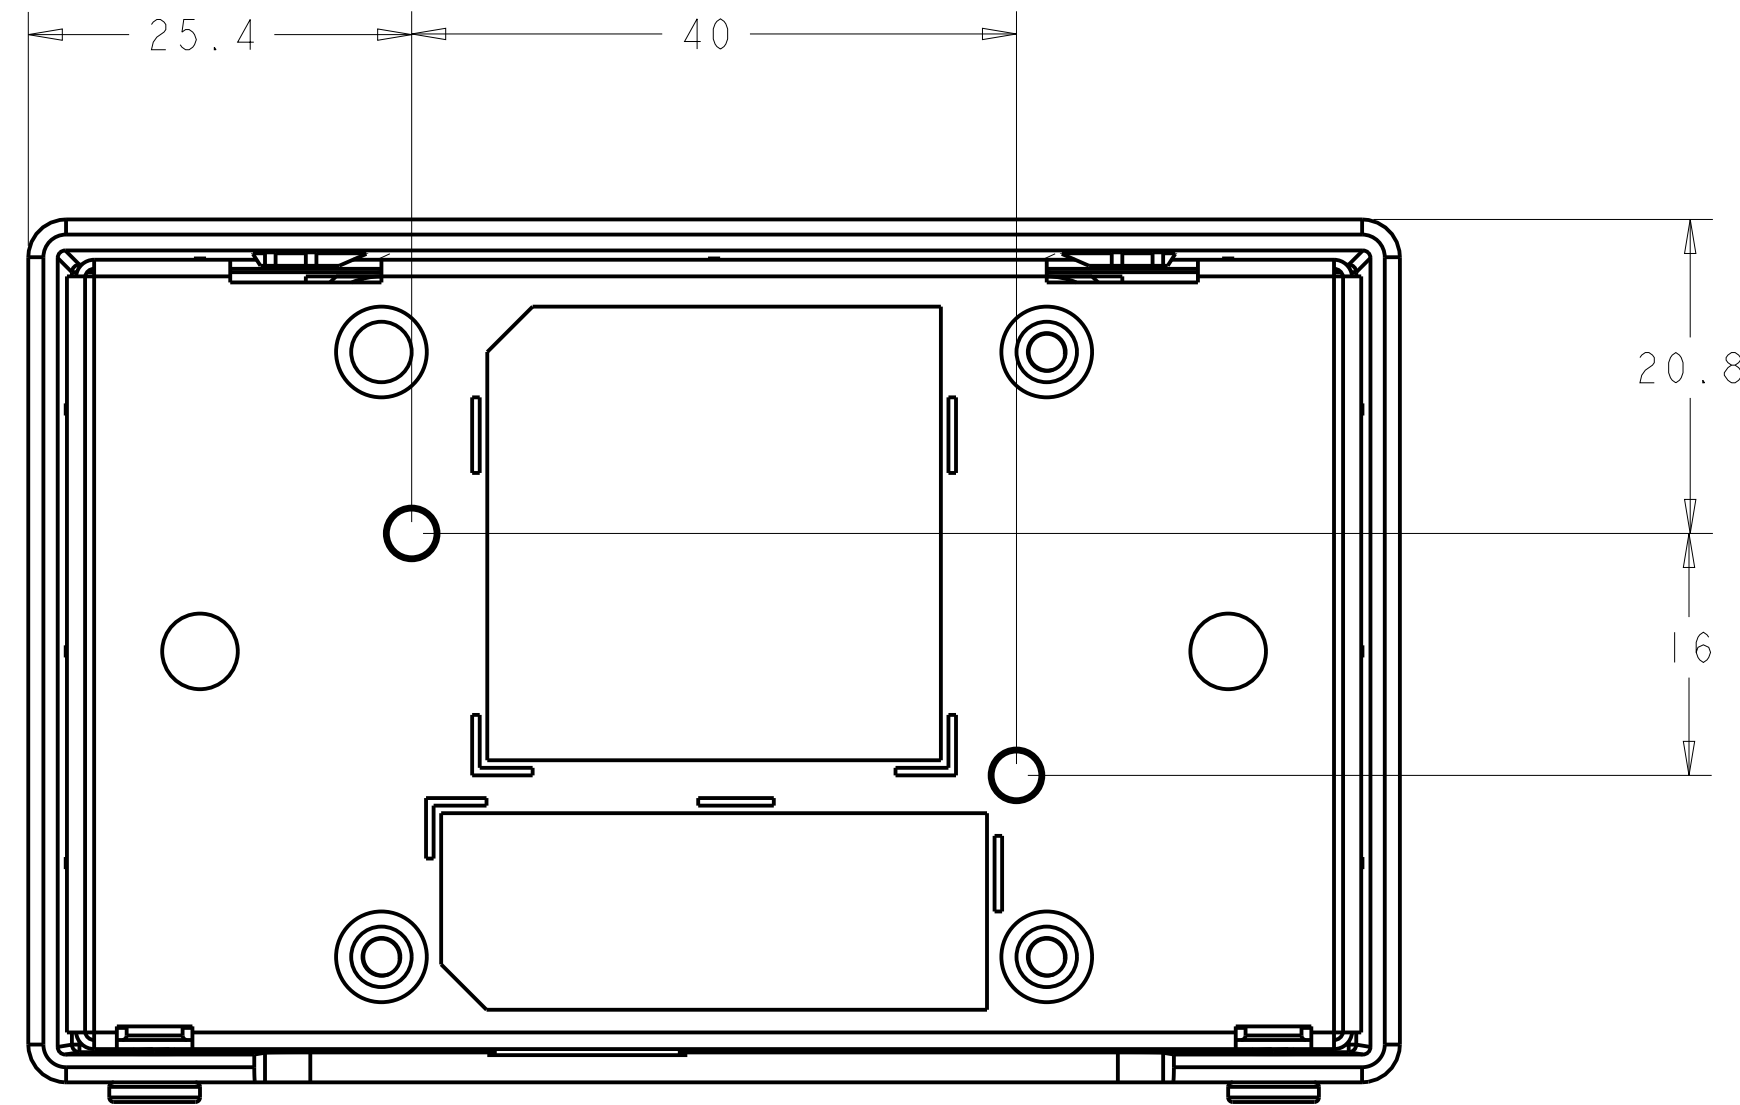
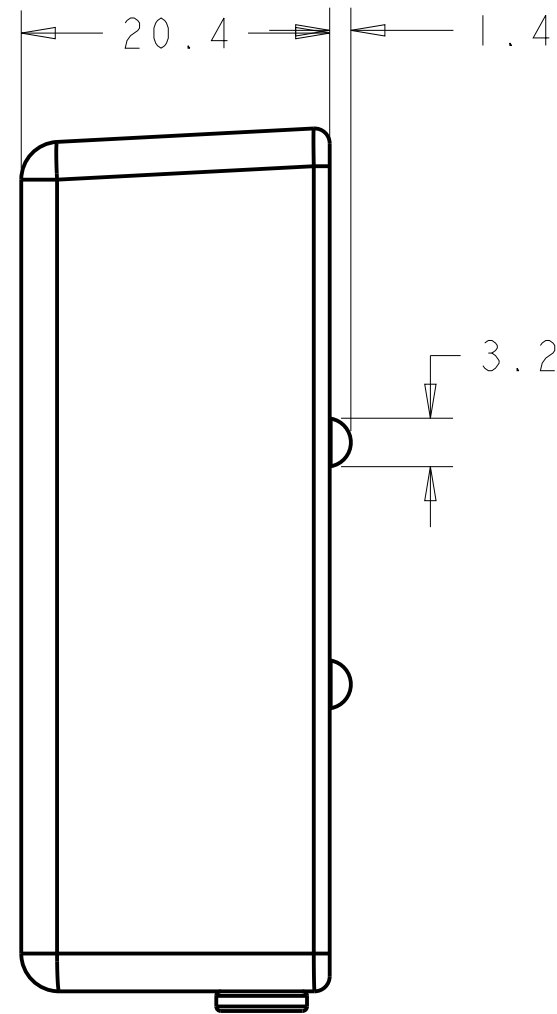


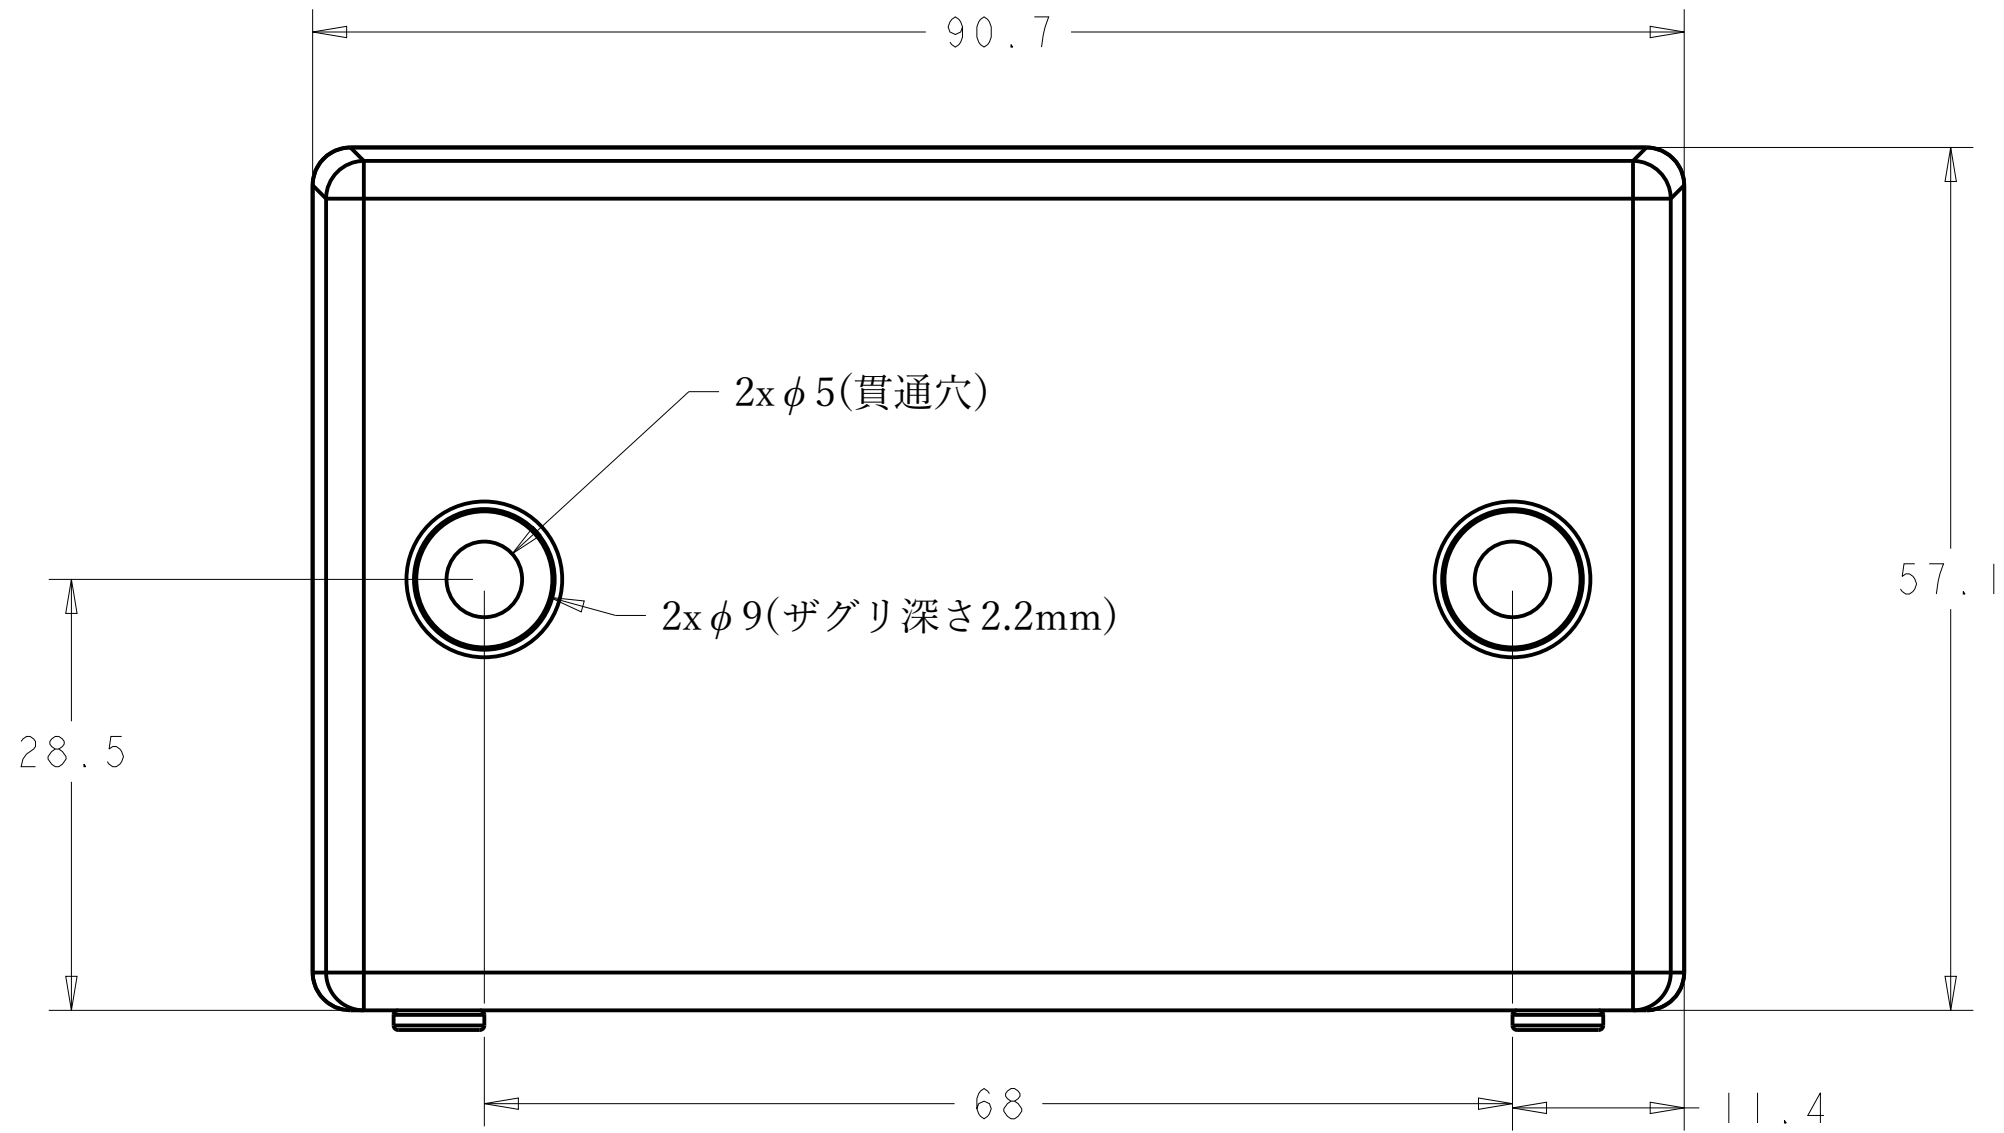

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT CURRENT RATING: 8A
 - CONTACT VOLTAGE RATING: 300V AC
 - CONTACT RESISTANCE: 20M Ω MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1500V. AC. FOR 1 MINUTE
 - INSULATION RESISTANCE: 500 M Ω MIN. AT 500V. DC
 - MECHANICAL PROPERTIES:
 - TEMPERATURE RANGE: -40°C TO +105°C
 - TORSION: 0.2N.M2.04 KGF.CM
 - STRIP LENGTH: 6~7 MM